

## EC3032 Series, Polymer Encapsulated Pt Temperature Sensor

Temperature range -50 °C to +200 °C, temporary up to +250 °C

- Robust semi-rigid protection
- Internal protection IP67 and IP68
- Wide operation range: -50 °C to 200 °C
- 6kV AC dielectric strength
- According to DIN EN 60751

The Encapsulated Precision Temperature Sensor EC3032 was originally designed as a precise, robust temperature sensor for high-end industrial e-motors. Its properties make it the ideal sensing solution in e-motors, industrial automation, analytical equipment, or EV charging plugs. The EC3032 is a standard product.

In principle, the products can also be used in automotive applications, in this case YAGEO Nexensos will check upon the request of the customer, whether additional requirements can be met (e.g. IMDS, PPAP).

Nominal Resistance (Element) $R_0$ [Ω]	Tolerance Class (Element)	Order Number	Packaging
Pt 100	F 0.3 (B)	5180937	Plastic bag
Pt 1000	F 0.3 (B)	5016951	Plastic bag

### Temperature Range of Tolerance Class

Validity of Class F 0.3 (B) -50 °C to +200 °C  
Temporary up to 250 °C (up to 50 hours)

### Temperature Coefficient

TCR = 3850 ppm/K

### Response Time

Water ( $v = 0.3$  m/s)  $t_{0.5} = 3.1$  s  
 $t_{0.9} = 8.1$  s

### Measuring Current

Pt100 Ω: 0.3 to 1.0 mA  
Pt1000 Ω: 0.1 to 0.3 mA  
(self-heating has to be considered)

### Long-Term Stability (Sensor Element)

The drift of the resistance value at 0 °C after a storage for 1000 hours in air at the declared upper temperature limit is not more than the tolerance value of the declared tolerance class according DIN EN 60751.  
Typical drift of  $R(0$  °C) is 0.04 % after 1000 hours at +500 °C.

### Self-Heating (Sensor Element)

0.4 K/mW at 0 °C

### Connection Technology

Welding, Crimping, Brazing, Soft Soldering, Clamping

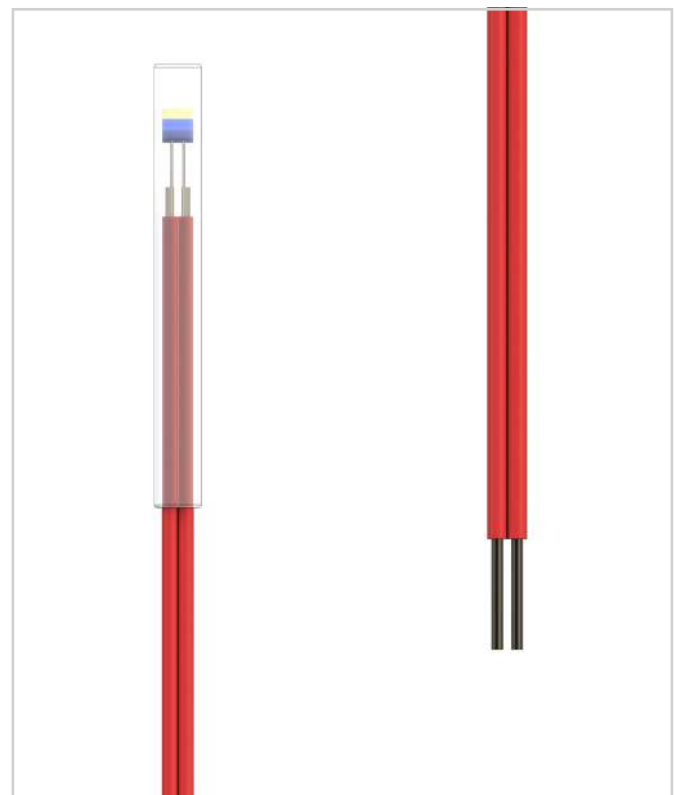


Image for illustration purposes only

## EC3032 Series, Polymer Encapsulated Pt Temperature Sensor

Temperature range -50 °C to +200 °C, temporary up to +250 °C

### Housing

Semi-rigid fluorocarbon

### Connection Cable

PTFE insulated, AWG24 (0.24 mm<sup>2</sup>), stranded Ni-plated Cu

### Conductor Resistance

0.0648 Ω (0.081 Ω/m)

### Application Examples

- E-motor and Stator protection
- Industrial Automation
- Analytic Equipment
- Charging Connectors

### Properties

- Internal Protection:  
IP67 and IP68 according to DIN EN 60529
- Dielectric Strength (Sensor Head):  
6kV AC, 60 sec
- Approx. 100 N cable pull force, measured between  
cables and sensor housing at room temperature
- Robust semi-rigid protection out of PTFE

### Customer-Specific Adaptions can be implemented in High Volume for the following Properties:

- Total Length L
- Cable Length CL / Cable Type
- Sensor Housing Length HL
- Sensor Housing Diameter ØD
- Sensor Resistance
- Connectors

### Dimensions and Tolerances in mm

ØD: 3.2 +0.2 -0.4  
HL: 30 ±5  
CL: 400 ±10  
L: 408 ±10  
L2: 6

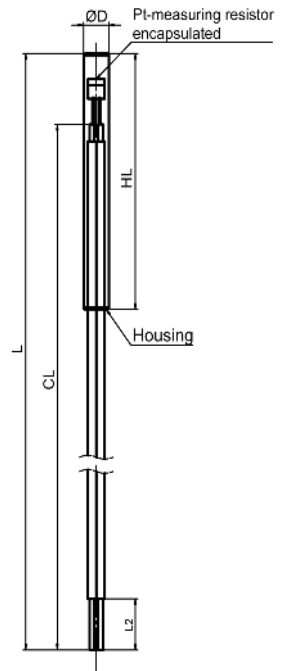


Image for illustration purposes only

Resistance vs.  
Temperature Table



**RoHS**  
compliant

The information provided in this data sheet describes certain technical characteristics of the product, but shall not be qualified or construed as quality guarantee (Beschaffenheitsgarantie) in the meaning of sections 443 and 444 German Civil Code. The information provided in this data sheet regarding measurement values (including, but not limited to, response time, long-term stability, vibration and shock resistance, insulation resistance and self-heating) are average values that have been obtained under laboratory conditions in tests of large numbers of the product. Product results or measurements achieved by customer or any other person in any production, test, or other environment may vary depending on the specific conditions of use. The customer is solely responsible to determine whether the product is suited for the customer's intended use; in this respect YAGEO Nexensos cannot assume any liability. The sale of any products by YAGEO Nexensos is exclusively subject to the General Terms of Sale and Delivery of YAGEO Nexensos in their current version at the time of purchase, which is available under [www.yageo-nexensos.com/tc](http://www.yageo-nexensos.com/tc) or may be furnished upon request. This data sheet is subject to changes without prior notice.

YAGEO Nexensos GmbH, Reinhard-Heraeus-Ring 23, 63801 Kleinostheim, Germany

YAGEO Nexensos GmbH, Germany  
Web: [www.yageo-nexensos.com](http://www.yageo-nexensos.com)  
Contact: [nexensos.america@yageo.com](mailto:nexensos.america@yageo.com)

Document: 20003792241 Part 001 Version 04 | Status: 05/2023

Page 2 of 2