


FEMALE FACE VIEW

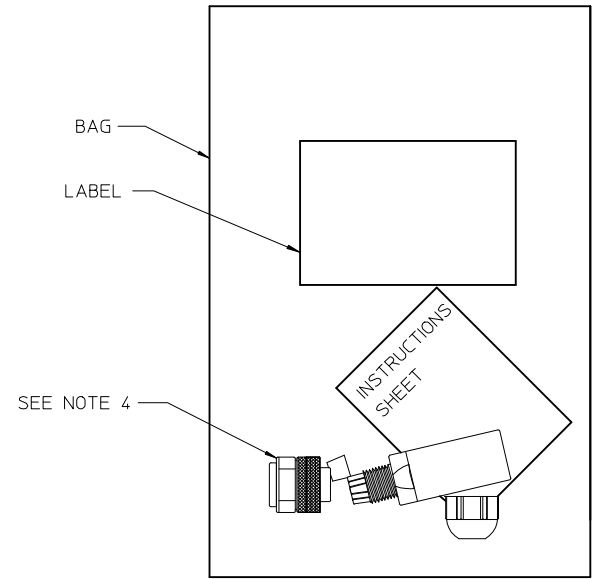

(B) PACKAGED VIEW (C) INSTURCTIONS SHEET

NOTES:

- 1. CABLE RANGE: .16 to .32 DIA. (4.1mm TO 8.1mm)
- 2. MAX CONDUCTOR SIZE: 18 AWG
- (B) 3. PART SHOWN ASSEMBLED FOR DIMENSIONAL REF. ONLY
- 4. COMPONENTS ARE SHIPPED AS UNASSEMBLED KIT

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
6	1	PACKING GLAND (GROMMET)	NITRILE RUBBER	BLACK
5	1	PACKING NUT	NYLON	BLACK
4	1	OVERMOLD	POLYAMIDE	BLACK
3	1	COUPLING NUT	BRASS	NICKEL PLATED
2	5	CONTACT SOCKET	BRASS	SILVER PLATED
1	1	INSERT, 5/C. DC KEY, FEMALE	POLYAMIDE	BLACK

EC NO: IPG2013-0834	DRWN: BARDEN 2012/12/05	CHKD:	APPR: J. MURPHY 2013/02/26
DESCRIPTION			
REV			

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)
▽=0	mm INCH
▽=0	4 PLACES ± --- ± ---
	3 PLACES ± --- ± ---
	2 PLACES ± 0.13 ± .01
	1 PLACE ± 0.25 ± ---
	ANGULAR ± 1/2°
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
IN/MM			INCH	
DRAWN BY	DATE	TITLE		
R. STONE	2007/10/11	MICRO-CHANGE 5/C FIELD ATTACHABLE FEMALE		
CHECKED BY	DATE	MOLEX INCORPORATED		
J. MACNEIL	2007/10/16	MATERIAL NO. 848549317		
APPROVED BY	DATE	DOCUMENT NO. SD-84854-019		
J. MACNEIL	2007/10/16	SHEET NO. 1 OF 1		