


KI5209



Capacitive sensor

KI-3015-FPKG/NI/0,10M/PH/US100

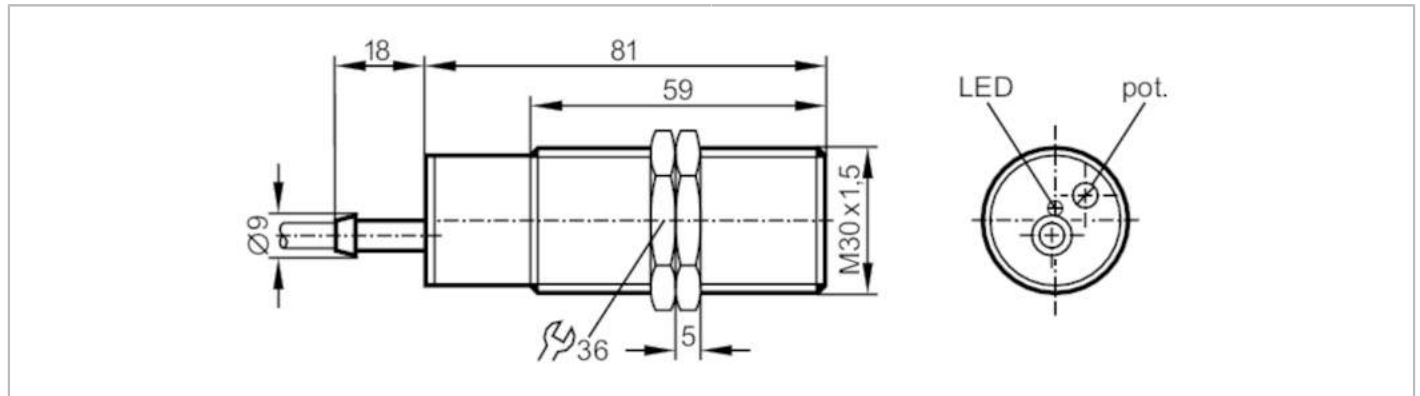

| Product characteristics | |
|--|--|
| Electrical design | PNP |
| Output function | normally open / normally closed; (selectable) |
| Sensing range [mm] | 3...15 |
| Housing | threaded type |
| Dimensions [mm] | M30 x 1.5 / L = 81 |
| Electrical data | |
| Operating voltage [V] | 10...36 DC |
| Current consumption [mA] | < 15 |
| Protection class | II |
| Reverse polarity protection | yes |
| Outputs | |
| Electrical design | PNP |
| Output function | normally open / normally closed; (selectable) |
| Max. voltage drop switching output DC [V] | 2.5 |
| Permanent current rating of switching output DC [mA] | 250 |
| Short-time current rating of switching output [mA] | 250 |
| Switching frequency DC [Hz] | 40 |
| Short-circuit proof | yes |
| Overload protection | yes |
| Detection zone | |
| Sensing range [mm] | 3...15 |
| Sensing range adjustable | yes |
| Factory setting sensing range [mm] | 15 |
| Real sensing range Sr [mm] | 15 ± 10 % |
| Operating distance [mm] | 0...12.1 |
| Accuracy / deviations | |
| Correction factor | glass: 0.4 / water: 1 / ceramics: 0.2 / PVC: 0.2 |
| Hysteresis [% of Sr] | 1...15 |

KI5209



Capacitive sensor

KI-3015-FPKG/NI/0,10M/PH/US100

| | | |
|--------------------------------------|------------------|--------------------------------|
| Switch point drift | [% of Sr] | -15...15 |
| Operating conditions | | |
| Ambient temperature | [°C] | -25...80 |
| Protection | | IP 65 |
| Tests / approvals | | |
| MTTF | [years] | 692 |
| Mechanical data | | |
| Weight | [g] | 102.5 |
| Housing | | threaded type |
| Mounting | | non-flush mountable |
| Dimensions | [mm] | M30 x 1.5 / L = 81 |
| Thread designation | | M30 x 1.5 |
| Materials | | PBT |
| Displays / operating elements | | |
| Display | switching status | 1 x LED, red |
| Accessories | | |
| Items supplied | | lock nuts: 2 screwdriver: 1 |
| Remarks | | |
| Pack quantity | | 1 pcs. |

Electrical connection - plug

Cable: 0.1 m, PUR

Connector: 1 x M12; coding: A

