

Oxyride Dry Battery AAA type

# ZR03XT



## Specifications

Model number	ZR03XT
Nominal voltage	1.5V (Initial Voltage 1.7V)
Approximate weight	11g
Terminal	♀ cap ♂ base
Insulation of terminal and exterior	10MΩ (500V.D.C)
Externals size	Height 44.5 <sup>(+0)</sup> <sub>(-1.2)</sub> mm
	Diameter 10.5 <sup>(+0)</sup> <sub>(-1.0)</sub> mm

### ⚠ Caution

Since the initial voltage is higher than standard batteries (1.7V), Oxyride

batteries may not be compatible with all electronic equipment.

Electronic equipment containing a remaining capacity indicator may not function properly when using Oxyride batteries.

When Oxyride batteries are used with an external-type camera flash, the flash may not respond, or the flash may retain more heat compared to use with Alkaline batteries.


When equipment that operates on rechargeable batteries is changed with Oxyride batteries, the equipment may retain more heat compared to charging with Alkaline batteries.

Do not use oxyride batteries with flashlights or headlamps that use standard light bulbs, excessive current will flow which will produce a bright light but reduce the life of the bulb and/or generate heat which may cause the bulb housing to warp.


Oxyride batteries may not function in certain clocks.

※ The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.


## Dimensions

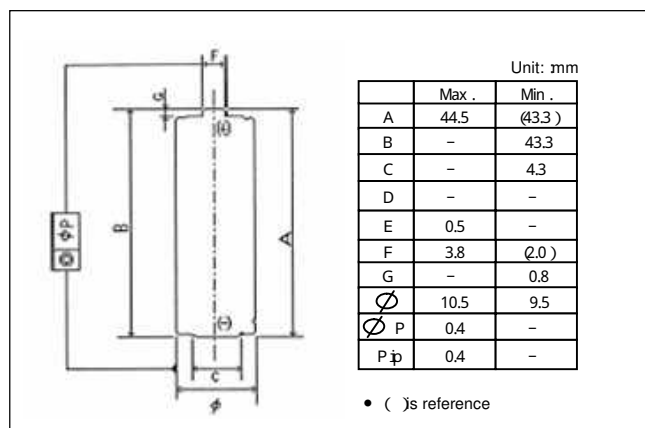







## Discharge characteristic (20°C± 2°C)

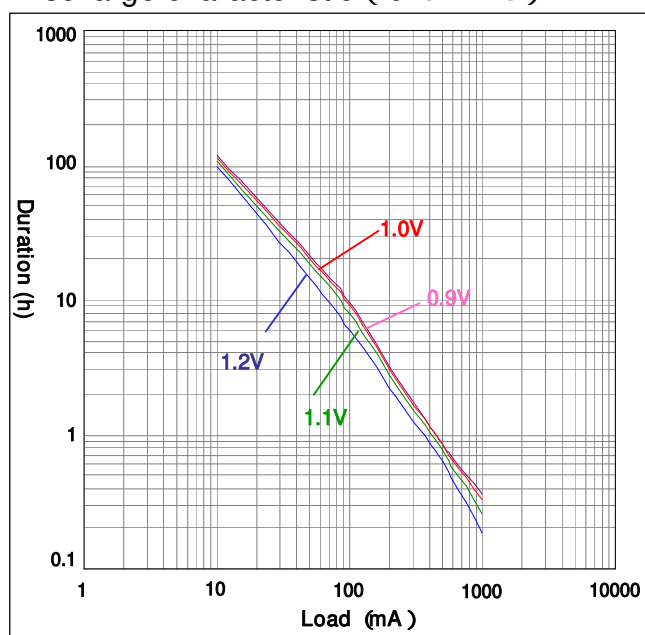

## Temperature characteristic

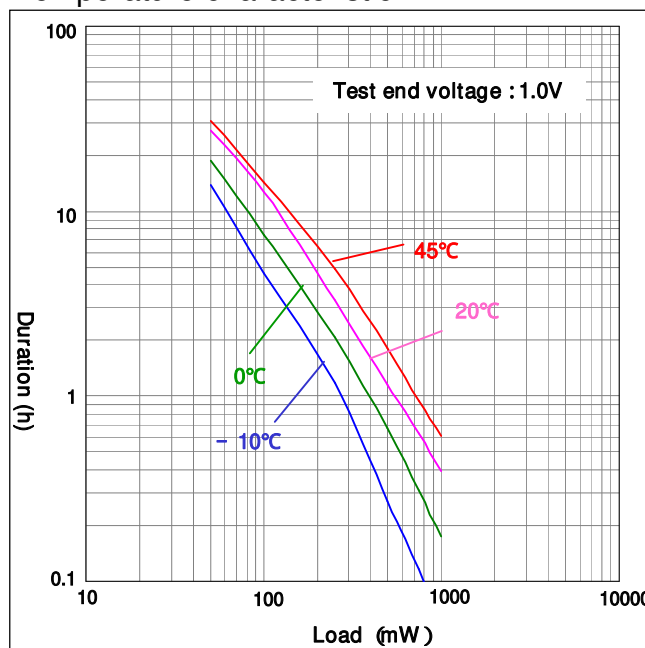

Discharge Curves

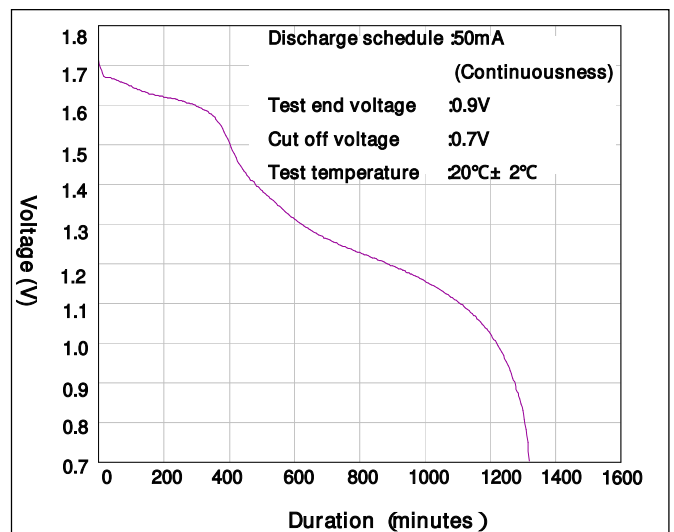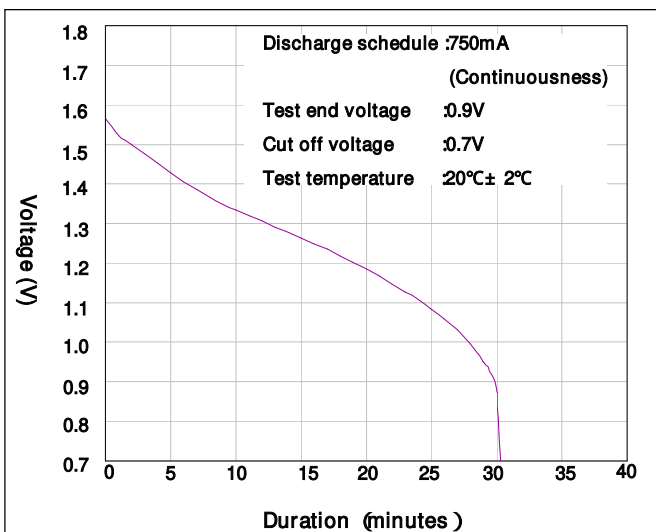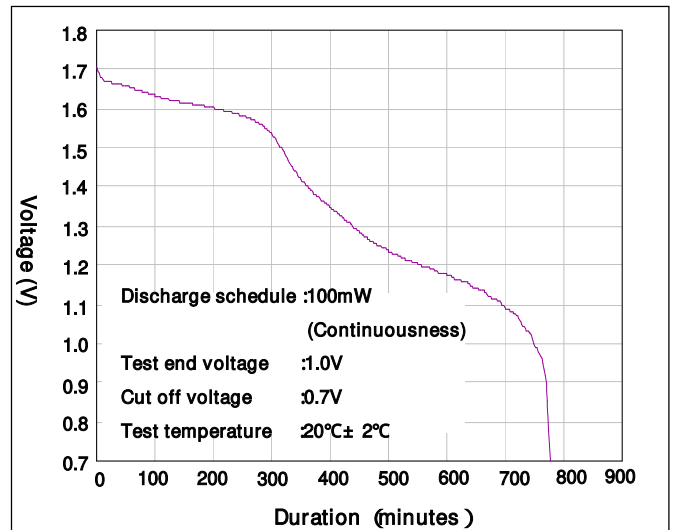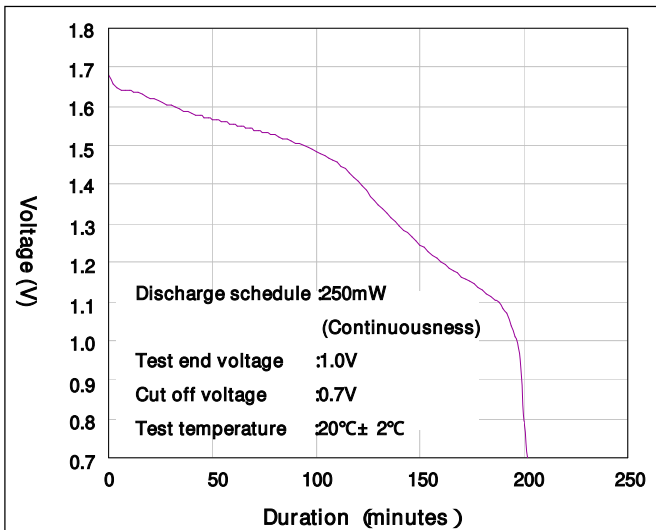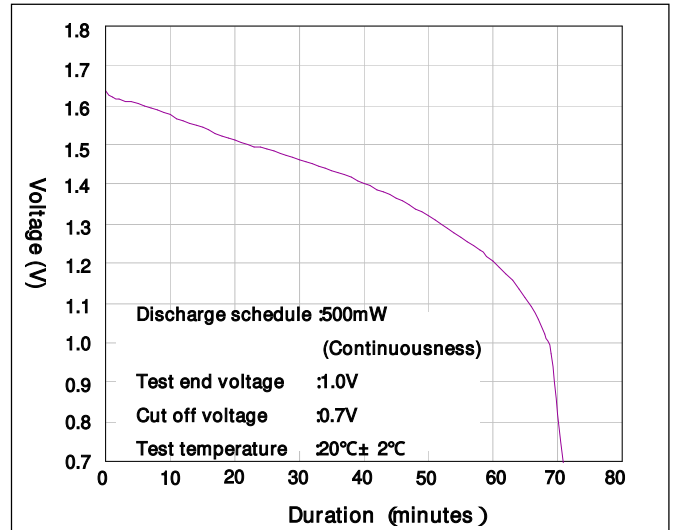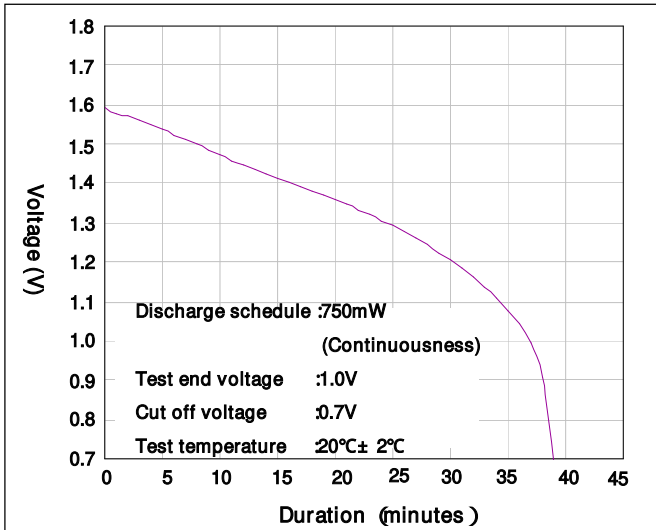

※ The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.