


# HC-B 10-TFQ-72/O1M25G

Order No.: 1604773



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1604773>

HEAVYCON sleeve housing B10, for double locking latch, height 72 mm, with support 1x M25, straight conductor exit

| Commercial data          |   |
|--------------------------|---|
| GTIN (EAN)               | <br>4 017918 882617 |
| sales group              | D002  |
| Pack                     | 10 pcs.   |
| Customs tariff           | 85389099  |
| Catalog page information | Page 484 (PC-2009)  |

### Product notes

WEEE/RoHS-compliant since:  
03/01/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

| General data |  |
|--------------|--|
| Note         | For contact inserts HC-B10, BB18, DD42, M, K8/24 |
| Design       | B10  |
| Height       | 72 mm  |
| Width        | 43 mm  |

|                                 |                          |
|---------------------------------|--------------------------|
| Length                          | 73 mm                    |
| Housing type                    | Sleeve housings          |
| Locking type                    | For double locking latch |
| Cable exit                      | Straight                 |
| Type of the screw connection    | 1x M25                   |
| Pg screw connection             | With                     |
| Degree of protection            | IP65                     |
| Ambient temperature (operation) | -40 °C ... 125 °C        |
| Housing material                | Aluminum, die-cast       |
| Housing surface material        | Powder-coated, gray      |

### Certificates / Approvals




Certification

GOST

### Diagrams/Drawings

Dimensioned drawing

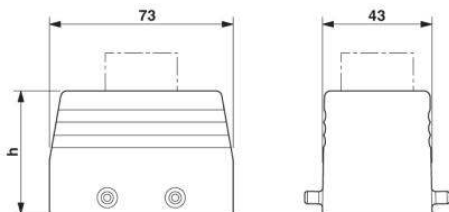

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;