

63340 PRODUCT DETAILS

<i>Property</i>	<i>Details</i>
<i>Height</i>	1.31 in (33.27 mm)
<i>Width</i>	17.00 in (431.8 mm)
<i>Perimeter</i>	142.00 in
<i>Weight</i>	11.3 lbs per foot (16.82 kg per meter)
<i>Material</i>	6063-T5 Aluminum Extrusion Alloy




THERMAL DATA

Natural Convection: 0.49 based on 70 C temp rise above ambient.

Thermal resistance is calculated based on a single 1" (25.4mm) square heat source centered on the heat sink. If you have distributed loads, then you can expect 10% better performance in natural convection and 20% better performance in forced convection.

Natural Convection

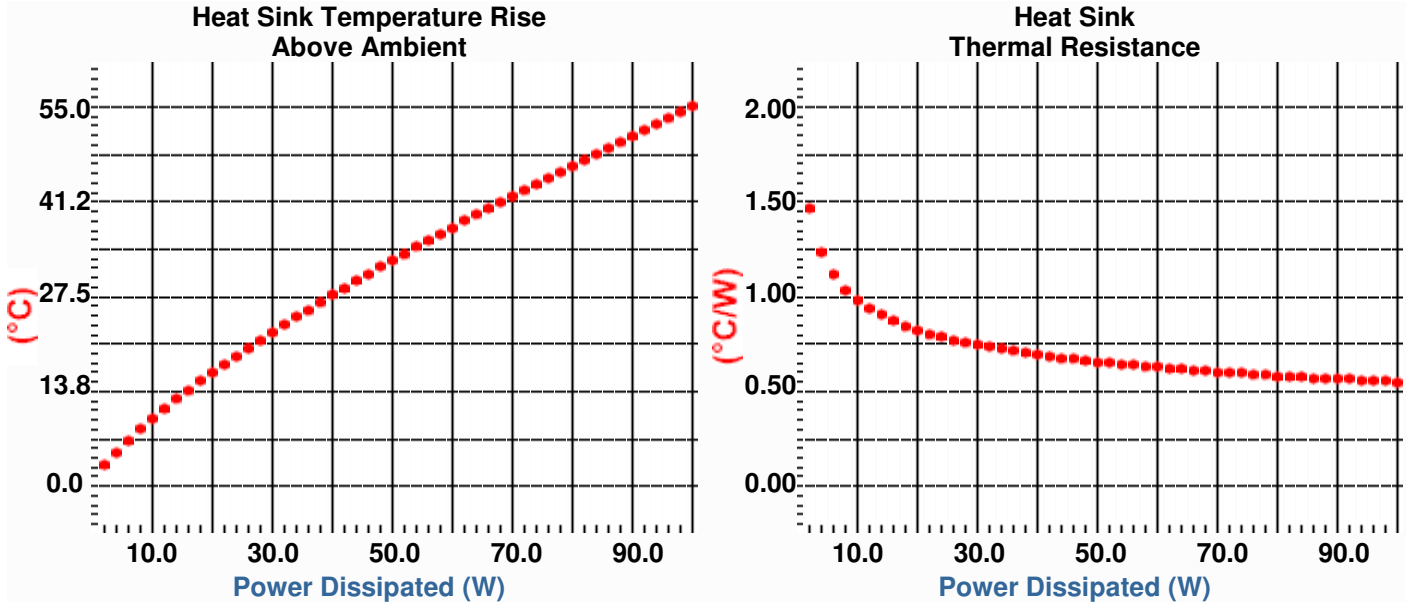

Forced Convection

