



used for: DIN EN 60603 TYPE "C 1/2"

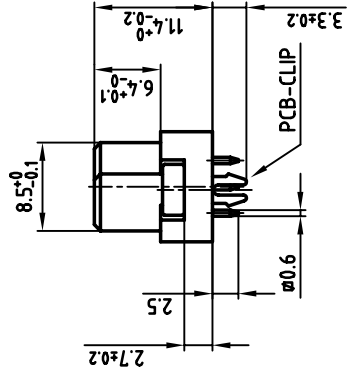


SEE NOTE 4

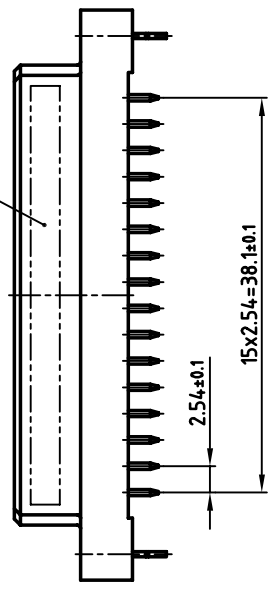


NOTES:

1. INSULATORS: PBTP UL 94 V-0, GREY
2. CONTACTS: COPPER ALLOY
PLATING: GOLD OVER NICKEL
50 MATING CYCLES
3. PCB-CLIP: COPPER ALLOY
PCB-HOLE: $\phi 2.8 \pm 0.1$; PCB THICKNESS 1.6mm
4. CONNECTOR IS PART MARKED: 122A13339X CONEC Y/WW

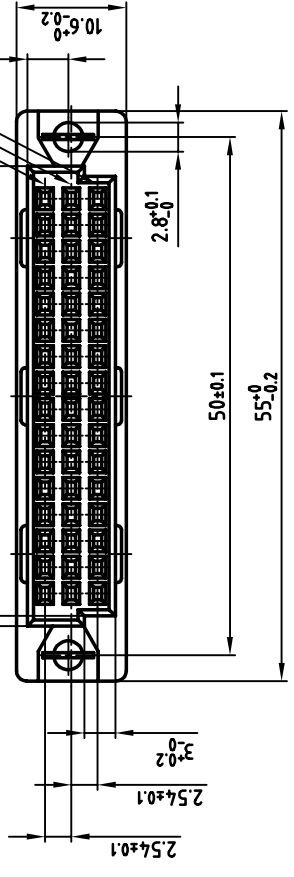

P.C.B. HOLE DRILLINGS

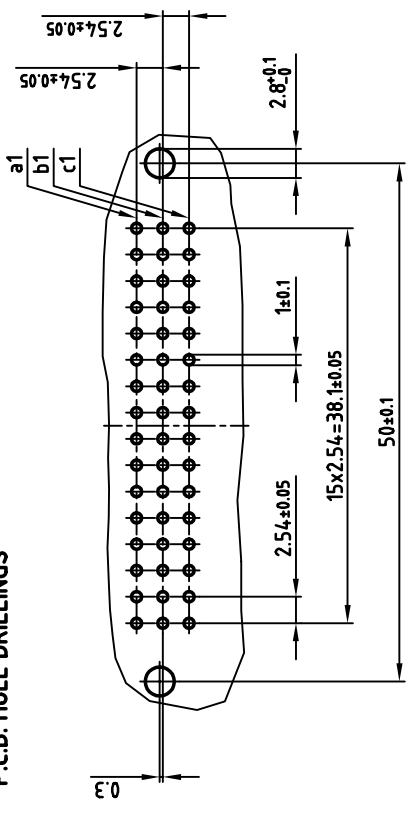

APPROVAL # FREIGABE # DEBLOCKAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	TITLE:
NAME:	COMPANY NAME:
APPROVAL # FREIGABE # DEBLOCKAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GMBH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance		scale:	2:1
material:	SEE NOTES	material:	SEE NOTES
2003	date	name	title:
drawn	02.07.	Lehmkuhler	FEMALE CONNECTOR TYPE "C 1/2"
appd.	02.07.	Mickenbecker	48pos. SOLDER PIN 2.5mm
norm	DIN EN 60603	DIN EN 60603	with clip
d-old			DIN-A
			3
			sh: 1/1
			part no:
			122A13339X
			dwg no:
			12K1A258
			AutocAD

