
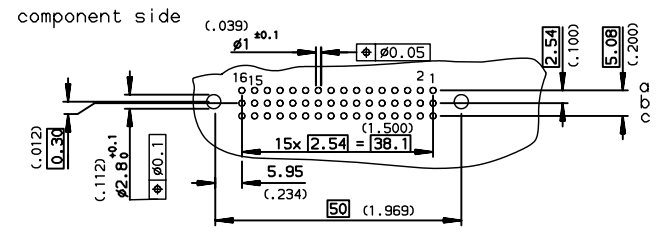


DIMENSIONS mm (inches)

PCB DRILLING

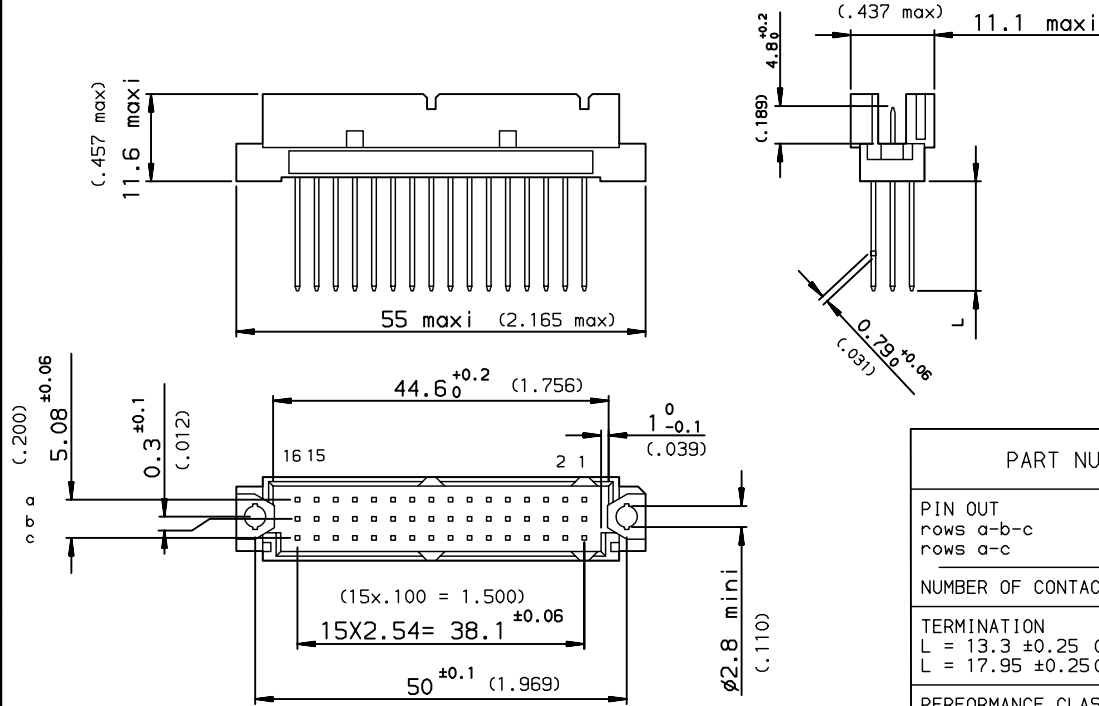

PART NUMBER	8609	<input type="checkbox"/>	<input type="checkbox"/>	76	<input type="checkbox"/>	7	<input type="checkbox"/>	5	<input type="checkbox"/>
PIN OUT									
rows a-b-c			3	48					
rows a-c			4	32					
NUMBER OF CONTACTS									
TERMINATION									
L = 13.3 ±0.25 (.523)								15	
L = 17.95 ±0.25 (.706)								25	
PERFORMANCE CLASS									
DIN 41612 class 3									4
DIN 41612 class 2									5
DIN 41612 class 1									6
TERMINATION TYPE									
TIN LEAD									000E1
LEAD FREE									E1LF

GENERAL CHARACTERISTIC and ROHS INFORMATION  
SEE DRAWING C-8609-0000B

European Views

www.fciconnect.com			surface ISO 1302 <input checked="" type="checkbox"/>	tolerance std ISO 406 ISO 1101	projection 	mm
TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	LEGALLIC	1996/02/20	ANGULAR	LINEAR	0.X	±0.1
Eng	LEGALLIC	1996/02/20			0.XX	±0.1
Chr	LEGARE	1996/02/20	0.XX' ±2'		0.XXX	±0.1
Appr	LEGARE	1996/02/20	Product family		DIN	Spec ref -
FCJ			title STRAIGHT MALE STYLE R/2			Rev.
			catalog no			dwg no C-8609-0279
			SEE TABLE			sheet 1 of 1

rev	ecn no	dr	date
B	-	HLE	1996/02/20
C	LS07-0130	HLE	2007/05/21
D	LS07-0211	HLE	2007/08/08
-	-	-	-
-	-	-	-
-	-	-	-

Copyright FCI. FCJ