




50VDC					
CAP (MFD)	T MAX	H MAX	L MAX	LS ± 0.059" (± 1.5mm)	LEAD AWG
0.0010	0.197" (5.0mm)	0.315" (8.0mm)	0.394" (10.0mm)	0.295" (7.5mm)	22
0.0015	0.197" (5.0mm)	0.315" (8.0mm)	0.394" (10.0mm)	0.295" (7.5mm)	22
0.0022	0.197" (5.0mm)	0.315" (8.0mm)	0.394" (10.0mm)	0.295" (7.5mm)	22
0.0033	0.197" (5.0mm)	0.315" (8.0mm)	0.394" (10.0mm)	0.295" (7.5mm)	22
0.0047	0.197" (5.0mm)	0.335" (8.5mm)	0.394" (10.0mm)	0.295" (7.5mm)	22
0.0068	0.197" (5.0mm)	0.335" (8.5mm)	0.394" (10.0mm)	0.295" (7.5mm)	22
0.010	0.197" (5.0mm)	0.335" (8.5mm)	0.394" (10.0mm)	0.295" (7.5mm)	22
0.015	0.217" (5.5mm)	0.354" (9.0mm)	0.394" (10.0mm)	0.295" (7.5mm)	22
0.022	0.236" (6.0mm)	0.374" (9.5mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.033	0.236" (6.0mm)	0.394" (10.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.047	0.256" (6.5mm)	0.413" (10.5mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.068	0.276" (7.0mm)	0.453" (11.5mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.10	0.295" (7.5mm)	0.472" (12.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.15	0.335" (8.5mm)	0.531" (13.5mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.22	0.335" (8.5mm)	0.591" (15.0mm)	0.748" (19.0mm)	0.591" (15.0mm)	20
0.33	0.394" (10.0mm)	0.650" (16.5mm)	0.748" (19.0mm)	0.591" (15.0mm)	20
0.47	0.492" (12.5mm)	0.728" (18.5mm)	0.748" (19.0mm)	0.591" (15.0mm)	20

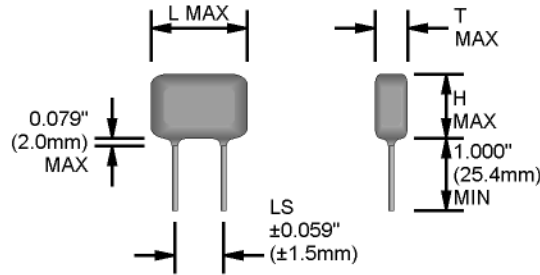


100VDC					
CAP (MFD)	T MAX	H MAX	L MAX	LS ± 0.059" (± 1.5mm)	LEAD AWG
0.0010	0.197" (5.0mm)	0.354" (9.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.0015	0.197" (5.0mm)	0.354" (9.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.0022	0.197" (5.0mm)	0.354" (9.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.0033	0.197" (5.0mm)	0.354" (9.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.0047	0.197" (5.0mm)	0.354" (9.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.0068	0.197" (5.0mm)	0.354" (9.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.010	0.197" (5.0mm)	0.354" (9.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.015	0.217" (5.5mm)	0.374" (9.5mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.022	0.236" (6.0mm)	0.394" (10.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.033	0.236" (6.0mm)	0.413" (10.5mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.047	0.256" (6.5mm)	0.433" (11.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.068	0.276" (7.0mm)	0.472" (12.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.10	0.295" (7.5mm)	0.472" (12.0mm)	0.748" (19.0mm)	0.591" (15.0mm)	20
0.15	0.315" (8.0mm)	0.591" (15.0mm)	0.748" (19.0mm)	0.591" (15.0mm)	20
0.22	0.295" (7.5mm)	0.591" (15.0mm)	1.024" (26.0mm)	0.787" (20.0mm)	20
0.33	0.335" (8.5mm)	0.630" (16.0mm)	1.024" (26.0mm)	0.787" (20.0mm)	20
0.47	0.394" (10.0mm)	0.689" (17.5mm)	1.024" (26.0mm)	0.787" (20.0mm)	20

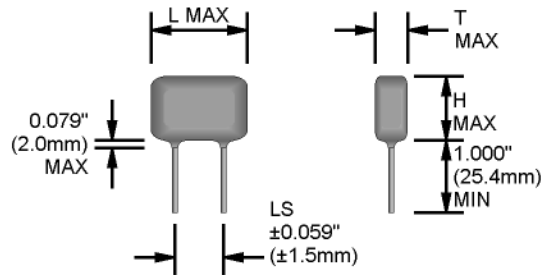

200VDC					
CAP (MFD)	T MAX	H MAX	L MAX	LS ± 0.059" (± 1.5mm)	LEAD AWG
0.0010	0.197" (5.0mm)	0.354" (9.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.0015	0.197" (5.0mm)	0.354" (9.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.0022	0.197" (5.0mm)	0.354" (9.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.0033	0.197" (5.0mm)	0.354" (9.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.0047	0.197" (5.0mm)	0.354" (9.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.0068	0.197" (5.0mm)	0.354" (9.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.010	0.197" (5.0mm)	0.354" (9.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.015	0.217" (5.5mm)	0.374" (9.5mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.022	0.236" (6.0mm)	0.394" (10.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.033	0.256" (6.5mm)	0.413" (10.5mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.047	0.276" (7.0mm)	0.433" (11.0mm)	0.748" (19.0mm)	0.591" (15.0mm)	20
0.068	0.295" (7.5mm)	0.453" (11.5mm)	0.748" (19.0mm)	0.591" (15.0mm)	20
0.10	0.315" (8.0mm)	0.512" (13.0mm)	0.748" (19.0mm)	0.591" (15.0mm)	20
0.15	0.315" (8.0mm)	0.630" (16.0mm)	0.748" (19.0mm)	0.591" (15.0mm)	20
0.22	0.354" (9.0mm)	0.650" (16.5mm)	1.024" (26.0mm)	0.787" (20.0mm)	20
0.33	0.394" (10.0mm)	0.728" (18.5mm)	1.220" (31.0mm)	1.083" (27.5mm)	20
0.47	0.492" (12.5mm)	0.866" (22.0mm)	1.220" (31.0mm)	1.083" (27.5mm)	20

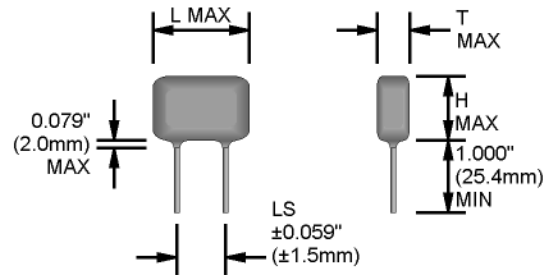

400VDC					
CAP (MFD)	T MAX	H MAX	L MAX	LS ± 0.059" (± 1.5mm)	LEAD AWG
0.0010	0.197" (5.0mm)	0.354" (9.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.0015	0.197" (5.0mm)	0.354" (9.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.0022	0.217" (5.5mm)	0.354" (9.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.0033	0.217" (5.5mm)	0.374" (9.5mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.0047	0.236" (6.0mm)	0.394" (10.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.0068	0.256" (6.5mm)	0.413" (10.5mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.010	0.276" (7.0mm)	0.433" (11.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.015	0.295" (7.5mm)	0.453" (11.5mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.022	0.315" (8.0mm)	0.453" (11.5mm)	0.748" (19.0mm)	0.591" (15.0mm)	20
0.033	0.335" (8.5mm)	0.551" (14.0mm)	0.748" (19.0mm)	0.591" (15.0mm)	20
0.047	0.374" (9.5mm)	0.610" (15.5mm)	0.748" (19.0mm)	0.591" (15.0mm)	20
0.068	0.354" (9.0mm)	0.610" (15.5mm)	1.024" (26.0mm)	0.787" (20.0mm)	20
0.10	0.413" (10.5mm)	0.689" (17.5mm)	1.024" (26.0mm)	0.787" (20.0mm)	20
0.15	0.433" (11.0mm)	0.748" (19.0mm)	1.220" (31.0mm)	1.083" (27.5mm)	20
0.22	0.512" (13.0mm)	0.866" (22.0mm)	1.220" (31.0mm)	1.083" (27.5mm)	20

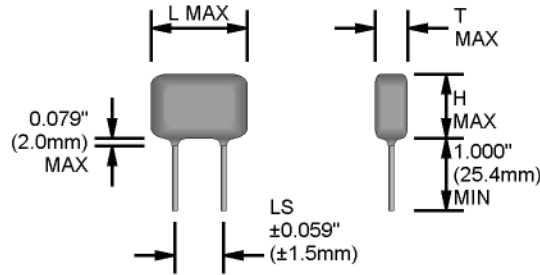

600VDC					
CAP (MFD)	T MAX	H MAX	L MAX	LS ± 0.059" (± 1.5mm)	LEAD AWG
0.0010	0.197" (5.0mm)	0.374" (9.5mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.0015	0.217" (5.5mm)	0.374" (9.5mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.0022	0.236" (6.0mm)	0.374" (9.5mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.0033	0.256" (6.5mm)	0.394" (10.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.0047	0.295" (7.5mm)	0.453" (11.5mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.0068	0.315" (8.0mm)	0.512" (13.0mm)	0.512" (13.0mm)	0.394" (10.0mm)	22
0.010	0.335" (8.5mm)	0.453" (11.5mm)	0.748" (19.0mm)	0.591" (15.0mm)	20
0.015	0.354" (9.0mm)	0.591" (15.0mm)	0.748" (19.0mm)	0.591" (15.0mm)	20
0.022	0.374" (9.5mm)	0.689" (17.5mm)	0.748" (19.0mm)	0.591" (15.0mm)	20
0.033	0.354" (9.0mm)	0.610" (15.5mm)	1.024" (26.0mm)	0.787" (20.0mm)	20
0.047	0.394" (10.0mm)	0.650" (16.5mm)	1.024" (26.0mm)	0.787" (20.0mm)	20
0.068	0.394" (10.0mm)	0.669" (17.0mm)	1.220" (31.0mm)	1.083" (27.5mm)	20
0.10	0.472" (12.0mm)	0.748" (19.0mm)	1.220" (31.0mm)	1.083" (27.5mm)	20

GENERAL SPECIFICATIONS

PHYSICAL CHARACTERISTICS

CONSTRUCTION: NON-INDUCTIVE WOUND POLYESTER FILM AND FOIL.

CASE: EPOXY DIPPED.

LEAD MATERIAL: SOLDER COATED OR TINNED SOLID WIRE, AWG AS SPECIFIED IN TABLES.

DIMENSIONS: AS SPECIFIED IN TABLES. OTHER LEAD LENGTHS, LEAD SPACINGS, AND CRIMP STYLES AVAILABLE UPON REQUEST.

ELECTRICAL CHARACTERISTICS

CAPACITANCE: AS SPECIFIED IN TABLES \pm REQUESTED TOLERANCE WHEN MEASURED AT OR REFERRED TO 1000 \pm 20 Hz AND 25 \pm 5 °C.

TOLERANCE: \pm 5%, \pm 10%, AND \pm 20% AVAILABLE. OTHER TOLERANCES AVAILABLE UPON REQUEST.

DISSIPATION FACTOR: SHALL NOT BE GREATER THAN 1.0% WHEN MEASURED AT OR REFERRED TO 1000 \pm 20 Hz AND 25 \pm 5 °C.

INSULATION RESISTANCE: SHALL BE GREATER THAN 50,000 M Ω WHEN MEASURED AFTER 1 MINUTE ELECTRIFICATION AT 100VDC OR RATED VOLTAGE, WHICHEVER IS LESS, AND 25 \pm 5 °C.

DIELECTRIC STRENGTH: 250% RATED VOLTAGE FOR 5 SECONDS THROUGH A LIMITING RESISTANCE OF 100 OHMS/VOLT AT 25 \pm 5 °C.

RATED VOLTAGE: 50VDC, 100VDC, 200VDC, 400VDC, AND 600VDC AVAILABLE.

TEMPERATURE: -40 °C TO +85 °C AT FULL RATED VOLTAGE OPERATIONAL TEMPERATURE, DERATE LINEARLY 1.5%/°C ABOVE +85 °C TO +105 °C, +105 °C MAX STORAGE TEMPERATURE.

ADDITIONAL INFORMATION

ORDERING INFORMATION: ALL ASC CAPACITORS ARE ORDERED BY "FAMILY CAP-TOL-VOLT" DESIGNATION. (I.E. TO ORDER A 621 0.1 μ F, \pm 10%, 400VDC CAPACITOR, REQUEST PART NUMBER "621 .1-10-400")

SEE ALSO: "GENERAL INFORMATION - POLYESTER CAPACITORS" DOCUMENT FOR ADDITIONAL PHYSICAL, ELECTRICAL, AND PERFORMANCE CHARACTERISTICS NOT MENTIONED IN THIS FILE.

WARNING: INFORMATION ON THIS FILE IS SUBJECT TO CHANGE WITHOUT NOTICE AT ASC'S DISCRETION.

LAST MODIFIED: 08/27/01