


REV	MODIFICATION	UPDATE DATE	SIGNATURE

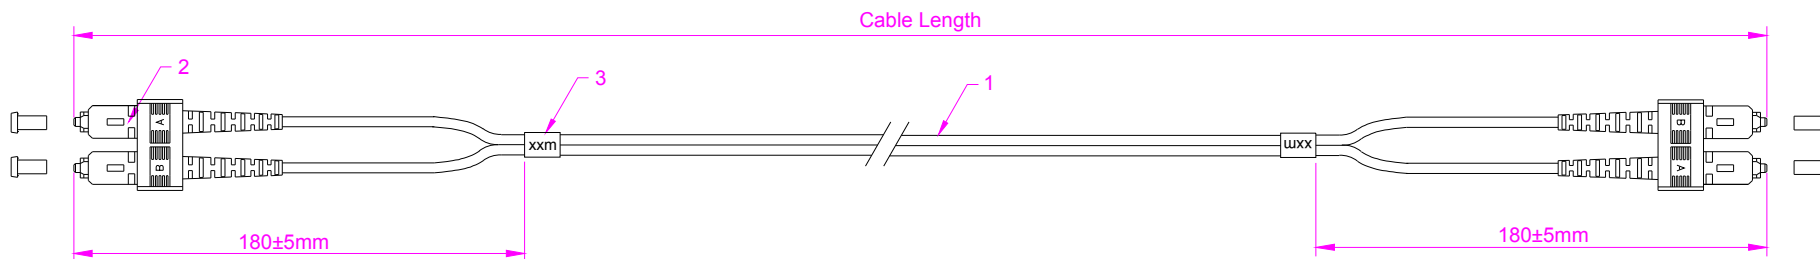

Technical requirements:

1.Performance requirements:

Insertion loss:  $IL \leq 0.2\text{dB}$


Return loss:  $RL \geq 35\text{dB}$

2.Fiber optic connectors meet IEC 61754,YDT1272 standards

3.Optical fiber cable in line with IEC60793-1, IEC 60794 standards

4.Fiber optic jumper complies with IEC 61300,GR-326, TIA/EIA568-B standards

5.A-B/B-A

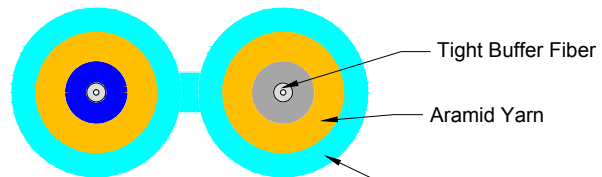

Cable Structure

Cable Length	Tolerance
Cable Length<1M	5cm
1M≤Cable Length<15M	10cm
15M≤Cable Length<30M	15cm
Cable Length≥30M	Cable Length*1%

Requirements Of Cable					
Cable Type				Fiber Type	OM4
Cable Diameter	2.0mm			@850nm <3.5dB/km	
Cable Material	PVC	Attenuation		@1300nm <1.5dB/km	
Tensile Strength	Long Term	60 N	Crush Resistance	Long Term	100 N/100mm
	Short Term	100 N		Short Term	500 N/100mm
Bending Radius	Static	30 D	Temperature Range	Storage Temperature	
	Dynamic	50D		-20 ~ +60	
				Operating Temperature	
				-20 ~ +60	

ITEM	QTY	P/N	SPECIFICATIONS		
3	2		Cable Label		
2	2		SC/UPC MM 2.0mm Duplex Connector(Beige Housing Beige Boot+Clip)		
1	A/R		OD: 2.0mm,Multimode 50/125 OM4 ,Duplex,Fiber Optic Cable,Color:Aqua,PVC		

	DRAW	Taylor Scott	DATE	18-08-2021	TITLE: Fiber Optic Patch Cord SC/UPC-SC/UPC Duplex 2.0mm OM4 Multimode				
	CHECK	<i>liwanhuan</i>	APPROVED		CUSTOMER NO		DWG NO	FJ5G4SCSC-XXM	REV