


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00404	Connector, mono plug, 2.5xL19.6 mm, brass, nickel plated, white, molding style	1	
2	30-00178	Wire, 2C BC, 28 AWG, 300V, 80C, 3.8 mm, foil + shield, PVC, white	1	
3	24-00028	Overmold, PVC, white	1	white

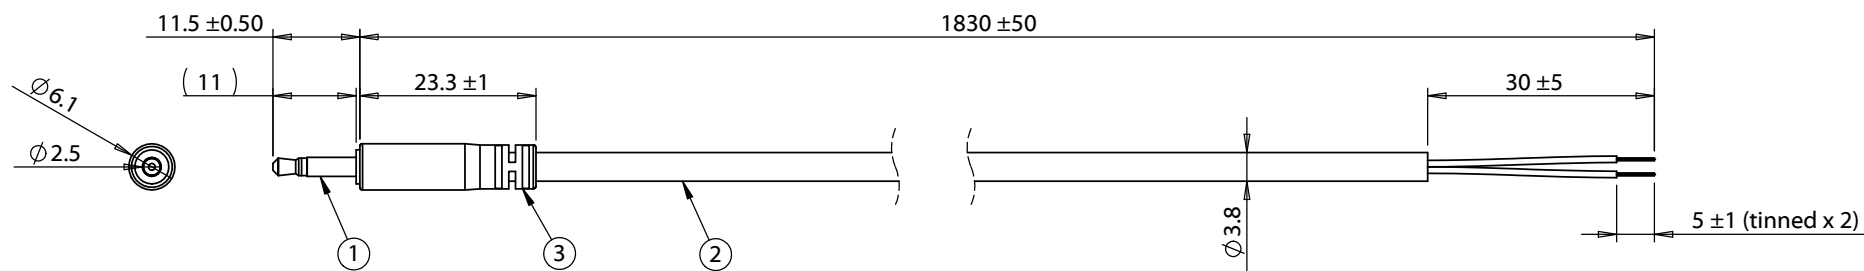

**Notes:**  
 Cables individually tied and bundled in groups of 10  
 Functionally equivalent components may be substituted

Wiring Diagram	
50-00404	wire color
tip	red
sleeve	white

Revision:	Date:	Description:	Prepared: <b>GL</b> <small>Digitally signed by GL Date: 2016.10.28 13:51:51 -07'00'</small>	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118          fax 1.541.323.4202 web tensility.com</p>
A	4/14/2010	Initial release	Verified: <b>DN</b> <small>Digitally signed by DN Date: 2016.10.28 15:10:06 -07'00'</small>	RoHS compliant	
A1	9/6/2011	Updated specification	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent	
A2	3/28/2012	Updated wire part number		Description: Cable, 1830 mm, 2.5 mm 50-00404 slim mono plug to 5 mm tinned, 28 AWG, 30-00178, shielded, white	
A3	3/27/2014	Updated connector		Size: A Part number: 10-00334	
A4	10/28/2016	Corrected overmold dimensions		Scale: 1:5	Sheet 1 of 1