
Ŧ	دی ا	m	C)





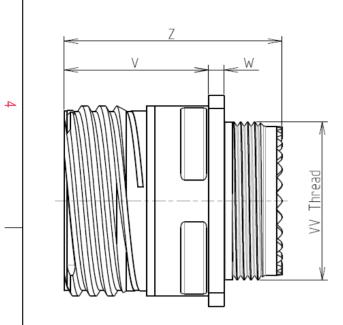

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	65℃ to +175℃			
-Salt Spray	: 500 hours			

: 14.95 g ± 10%

8D 0

G

11

W

01

В

F

Ν

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g


ORIENTATION : N

CONTACT LAYOUT : 11-01

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

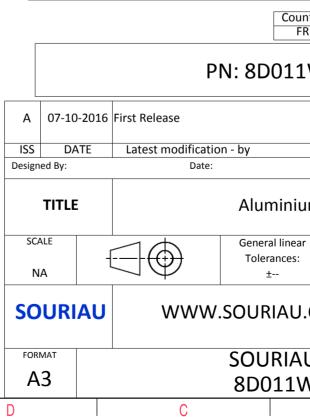

	Φ		A			
					4	
AS EX4	AMPLE				3	
s which er of t indation untry FR	non-conformit th does not co he Parties or to n, technical no Jurisd	mply with by a third part			2	
				MOD N°		
		CUSTOME	R DRAWING			
um	n Receptacle 8D series					
ar :			' PROJECT <b>59</b>			
			cument is the prop	perty of	1	
J.CC	.COM SOURIAU it must not be reproduced or communicated without permission					
U I	DRG N°	I		SHEET		
W0	1BN-C			1/2		
	В		А			

		G	<del>ار</del> (	m		0
		Contact Layout				Panel Cutout
4		01			Â	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		1#12 11-01	]		A - 2	
ω	Ctc A	X Y 0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of
N						(professional recommendati Country FR PN: 8D011W
					A 07-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
-					SCALE NA	Aluminium General linear Tolerances: ±
					FORMAT A3	J WWW.SOURIAU.Co SOURIAU 8D011W0
	Н	G	F	E	D	С

