







## 10.1" ~ 15.0" Stainless Steel Extended Temperature High Brightness Panel PC

- 304 Stainless Steel Front Bezel, IP69K Rating
- Extended Operating Temperature (-20~60°C)
- High-Brightness Sunlight Readable (1000 Nits) Optically Bonded LCD
- IP66 Rated for Washdown Environments
- Projected Capacitive Touch
- Fanless Operation; Intel® Celeron™ N2930 CPU
- Microsoft Windows® 10 IoT 2019 OS


-  Extended Temperature
-  304 Stainless Steel
-  Capacitive Touchscreen
-  High Brightness

<b>System</b>	<b>CPU</b>	Intel® Celeron™ N2930 Quad-Core 1.83 GHz Processor		
	<b>System Chipset</b>	SoC		
	<b>System Memory</b>	Onboard DDR3L 4 GB 1600 MHz		
<b>I/O Ports</b>	<b>USB</b>	2 x USB 3.0 type A		
	<b>Serial</b>	COM1: 1 x RS-232/422/485 DE9P(default RS-232) COM2: 1 x RS-232 DE9P		
	<b>Audio</b>	1 x 3.5 mm line out		
	<b>LAN</b>	2 x GbE RJ-45		
	<b>Power</b>	3-pin connector header, DC power input		
	<b>Remote Power Switch</b>	2-pin connector header		
	<b>Expansion</b>	<b>Expansion Slot</b>	Optional Wi-Fi kit (IEEE 802.11a/b/g/n/ac card and antenna)	
<b>Touch Screen</b>	<b>Type</b>	Projected Capacitive Touch		
	<b>Interface</b>	USB		
	<b>Light Transmission</b>	90+%		
<b>Display</b>	<b>Optical Bonding</b>	Yes		
	<b>Display Type</b>	<b>10.1" WXGA TFT LCD</b>	<b>12.1" SVGA TFT LCD</b>	<b>15.0" XGA TFT LCD</b>
	<b>Max. Resolution</b>	1280 x 800	800 x 600	1024 x 768
	<b>Max. Color</b>	16.7M	262K	16.7M
	<b>Luminance (cd/m<sup>2</sup>)</b>	1000	1000	1000
	<b>View Angle (H°/V°)</b>	170/170	178/178	160/150
	<b>Contrast Ratio</b>	1000:1	700:1	800:1
	<b>Backlight Lifetime (hours)</b>	50,000+	50,000+	50,000+
<b>Storage</b>	<b>Solid State Drive Type</b>	1 x 2.5" SATA III, MLC		
	<b>Solid State Drive Capacity Options</b>	64, 128, 256 GB SSD		
	<b>SD Card Slot</b>	1 x internal micro Secure Digital memory card socket, up to 32 GB		
<b>Electrical</b>	<b>Input Voltage</b>	9-36 VDC	9-36 VDC	9-36 VDC
	<b>Input Current</b>	0.68-2.72 A	1.11-4.46 A	1.07-4.29 A
	<b>Input Power (max.)</b>	24.5 W	40.1 W	38.6 W
<b>Mechanical</b>	<b>Dimensions (W x H x D)</b>	11.65 x 7.87 x 1.85" [296 x 200 x 46.9 mm]	13.03 x 11.19 x 2.05" [331 x 257 x 52 mm]	16.61 x 12.68 x 2.43" [422 x 322 x 54.1 mm]
	<b>Net Weight</b>	~ 5.51 lbs [2.5 kg]	~ 7.50 lbs [3.4 kg]	~ 11.24 lbs [5.1 kg]
	<b>Panel Cutout Dimensions (W x H)</b>	10.71 x 6.93" [272 x 176 mm]	11.93 x 9.02" [303 x 229 mm]	15.43 x 11.50" [392 x 292 mm]
	<b>Mounting</b>	Panel mounting VESA 100 x 100 mm	Panel mounting VESA 100 x 100 mm	Panel mounting VESA 100 x 100 mm
	<b>Construction</b>	304 Stainless Steel Front Bezel and Aluminum Chassis		
	<b>Environmental</b>	<b>Operating Temperature</b>	-4~140°F [-20~60°C]	
<b>Storage Temperature</b>		-22~158°F [-30~70°C]		
<b>Relative Humidity Rating</b>		10 to 95% @ 40°C, non-condensing IP66 / IP69K / NEMA 4 when panel mounted		
<b>Certification</b>		CE / FCC Class A / EN1672-2 / RoHS		
<b>Operating System</b>	<b>Microsoft Windows Options</b>	Microsoft Windows® 10 IoT Enterprise Embedded 2019 LTSC 64-bit (EPKEA) Microsoft Windows® 10 IoT Enterprise 2019 LTSC 64-bit (PKEA)		
<b>Notes</b>	Specifications subject to change without notice.			


## PCS6810



Top View

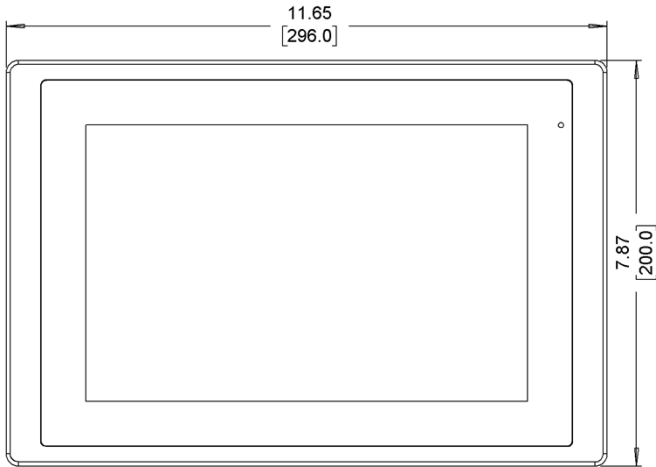


Front View

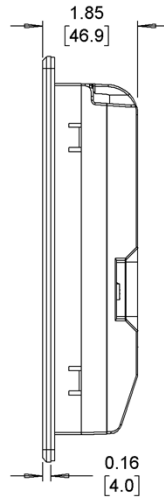


Side View


Dimensions are in inches [mm]

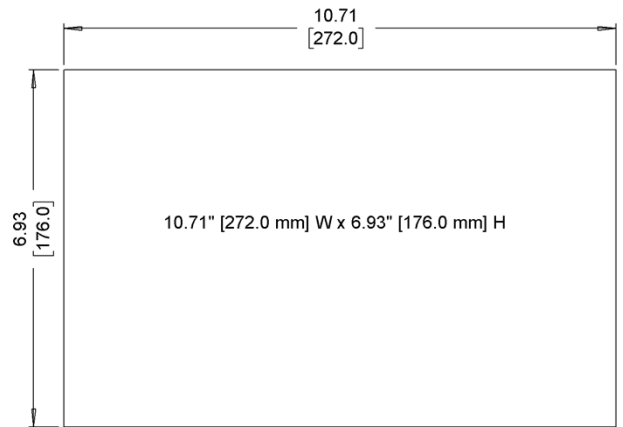

Cutout Dimensions

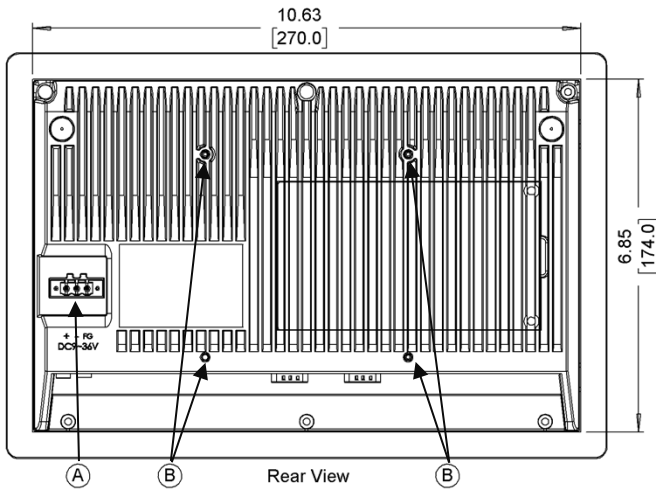


Rear View

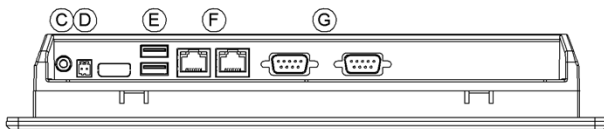

Bottom View


- A Power Connector
- B VESA 100 x 100 mm Screw Holes
- C Line Out
- D Remote Power Switch Connector
- E USB 3.0 Host Ports
- F Gigabit Ethernet Ports
- G DE9P COM Ports

# PCS6812




Top View

13.03  
[331.0]

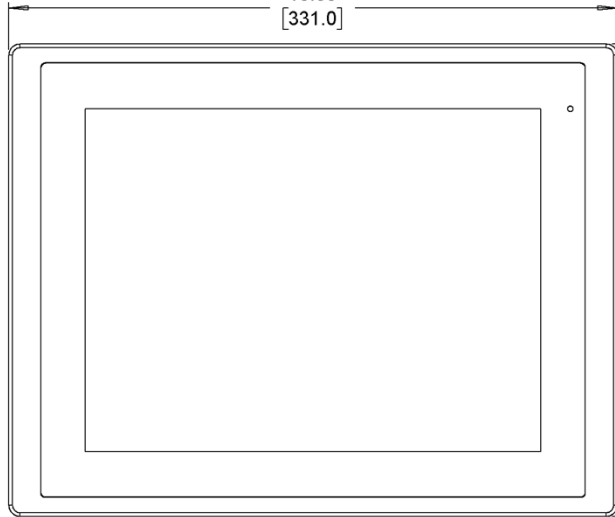


Front View

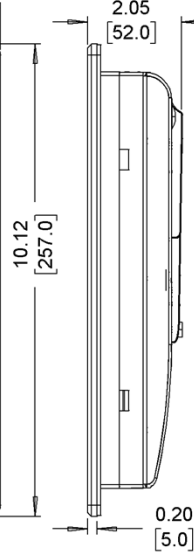


Side View

Dimensions are in inches [mm]

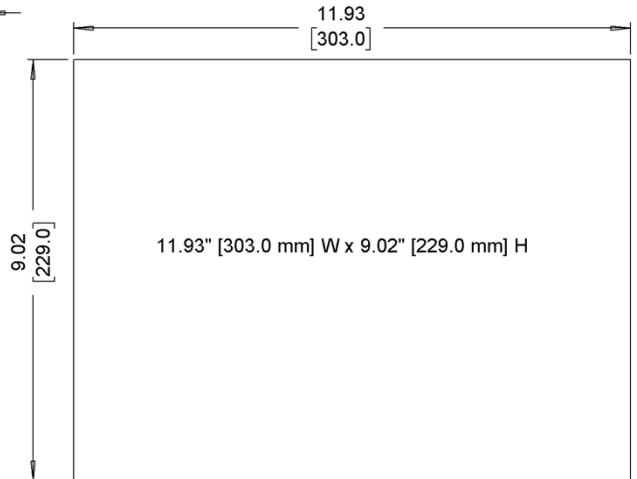


Cutout Dimensions

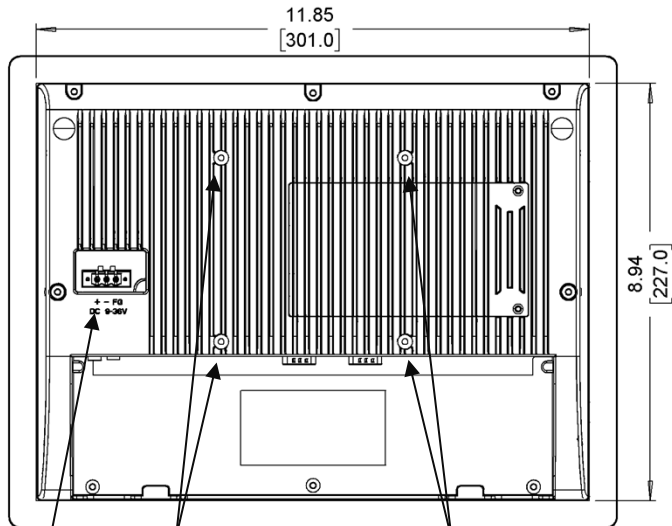

Rear View

11.85  
[301.0]

8.94  
[227.0]

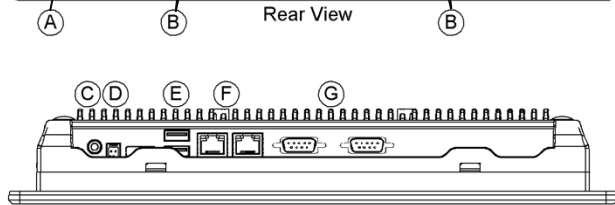


Bottom View

- A Power Connector
- B VESA 100 x 100 mm Screw Holes
- C Line Out
- D Remote Power Switch Connector
- E USB 3.0 Host Ports
- F Gigabit Ethernet Ports
- G DE9P COM Ports

## PCS6815

Dimensions are in inches [mm]

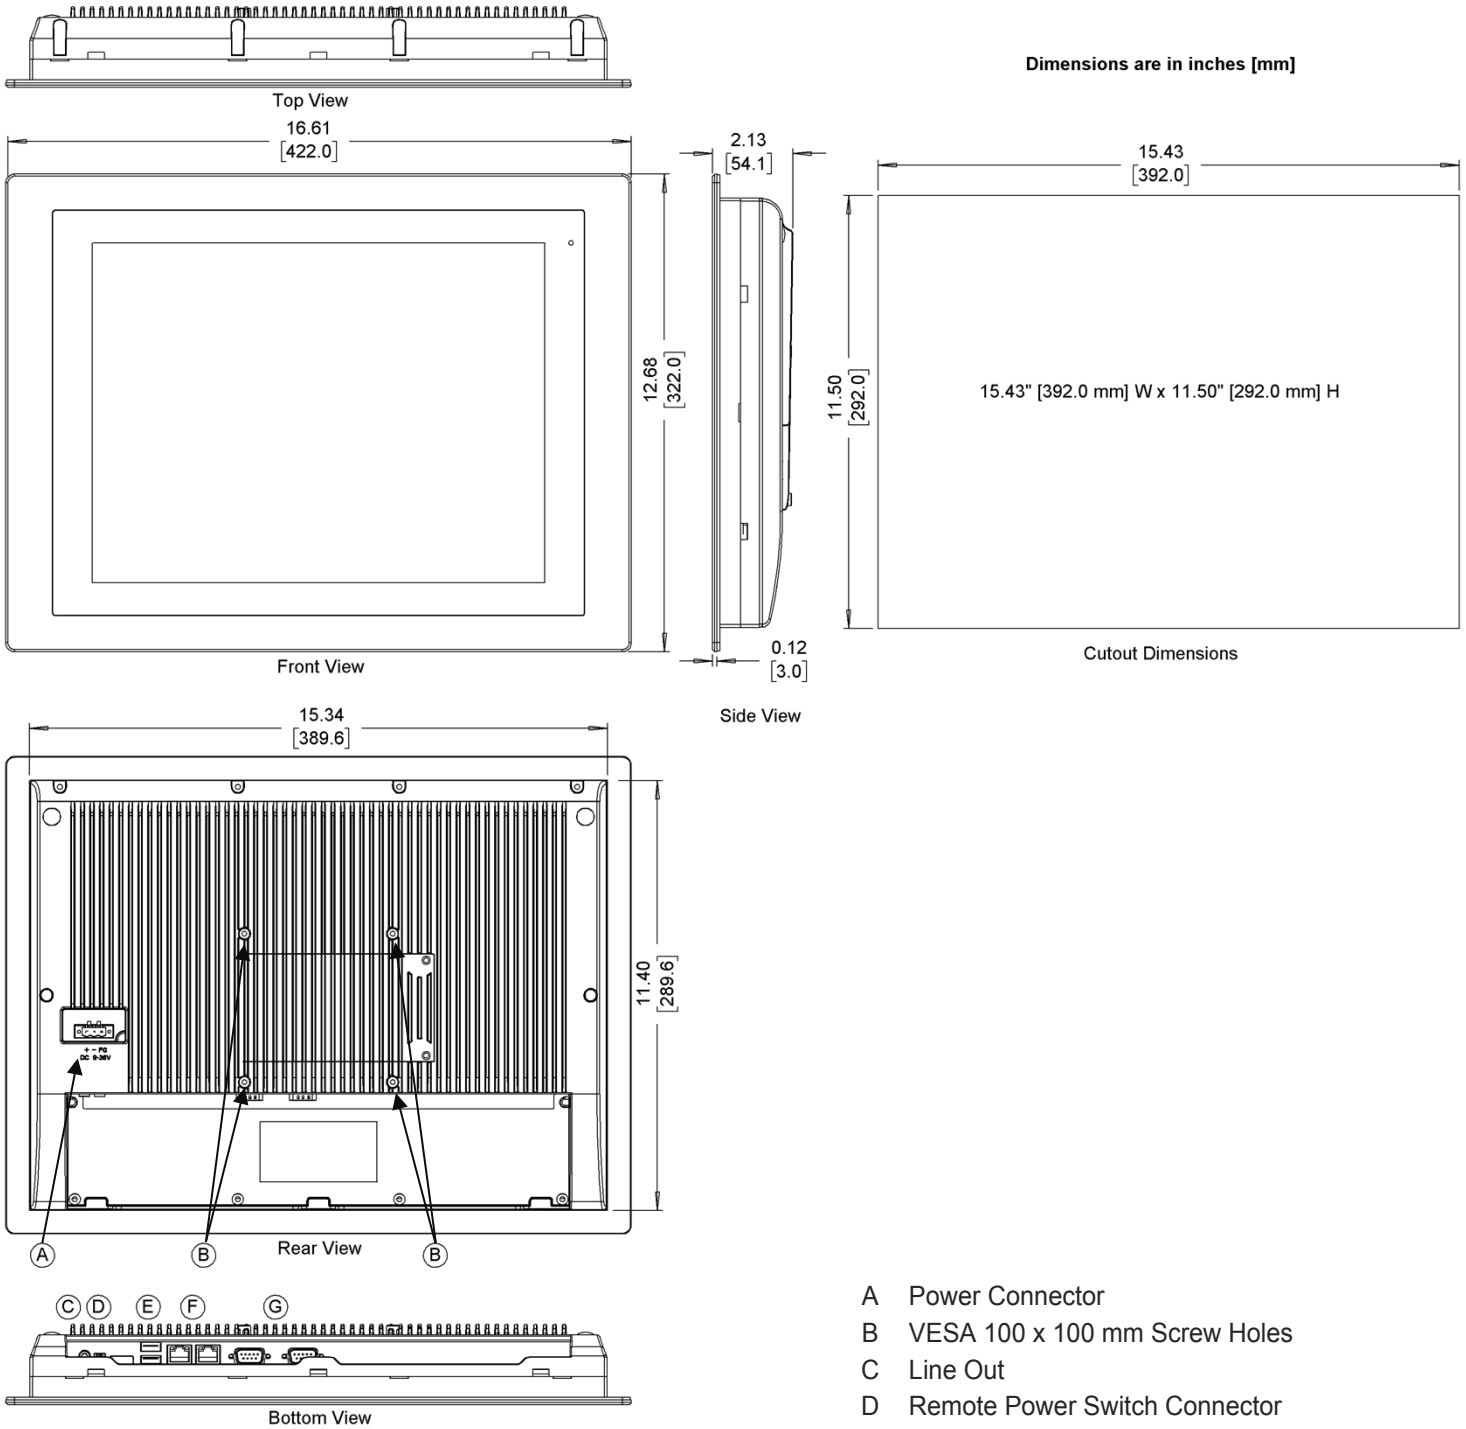

- A Power Connector
- B VESA 100 x 100 mm Screw Holes
- C Line Out
- D Remote Power Switch Connector
- E USB 3.0 Host Ports
- F Gigabit Ethernet Ports
- G DE9P COM Ports