


1. Wiring Diagram.

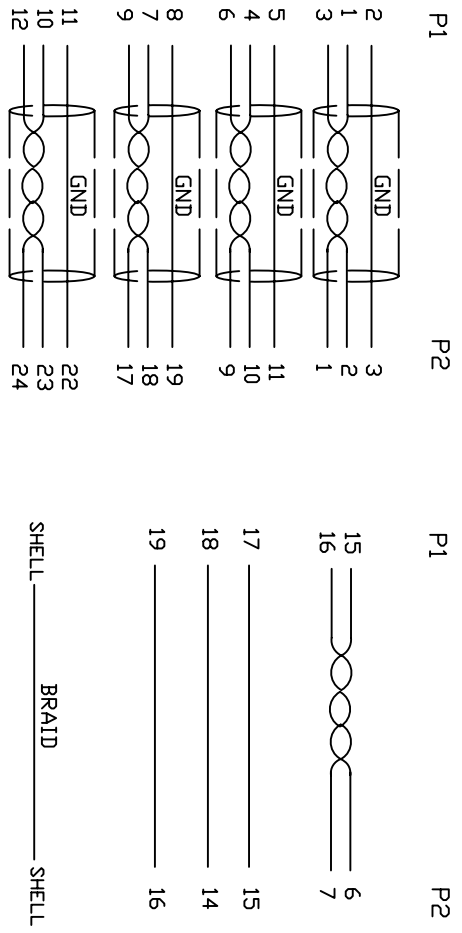

2. Cable test condition :

Open / Short : 100%

Insulation resistance : 5M ohms

Contact resistance : 2 ohm

Hipot : DC 300V / 1 sec

3. Each pcs with PE polybag.

8	SCREW	#4-40UNC RE32±0.2mm	BLK	2	
7	COOPER	W30MM*L75MM		1	
6	COOPER	W13MM*L30MM		1	
5	PVC	45P PVC BLACK OVERMOLD		80g	
4	PE	LLDPE 500026 6201 INSIDE MOLDING		30g	
3	CONN	DVI18+1 MALE PIN G/F ,SHELL PLATED G/F, INSULATION BLACK		1	P2
2	CONN	HDMI A TYPE MALE PIN G/F ,SHELL PLATED G/F, INSULATION BLACK		1	P1
1	CABLE	UL20276 (28AWG (1/0.32CUAD) *P+D+EA+AL/MY) *P+28AWG (1/0.32CUAD) *I+P+ 28AWG (1/0.32CU) X3C+AEM(16/8/0.12AM) OD7.3 BLACK		1	3000mm
NO.	PART NO.	DESCRIPTION		QTY	UNIT/REF
		BILL OF MATERIAL			

A	INITIAL RELEASE	2017/4/20
REV/ECN#	DESCRIPTION	DATE
	HDMI M TO DVI18+1 M CABLE	
DRAWN	EDWIN LAI	DATE
CHECKED	Win C	2/28/17
APPROVAL		
DWM NO.	741-20010-00300	REV
CUSTOMER P/N:		
CUSTOMER:		
SHEET	1 OF 1	

Cnc Tech, LLC

HDMI M TO DVI18+1 M CABLE

