
т	۵	п –	т	0





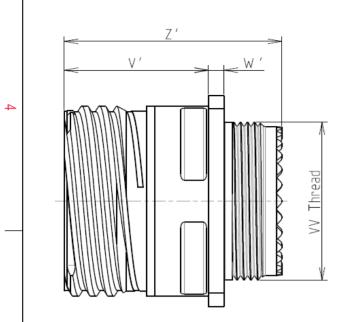

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ω

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Composite			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
2	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	65°C to +200°C			
	-Salt Spray	: 2000 hours			
	-Mass	: 14.4 g ± 10%			

8D 0

G

13

Μ

26

Ρ

F

Ν

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Z'	32 Max
V THREAD	M18x1-6g


ORIENTATION : N


D

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 13-26



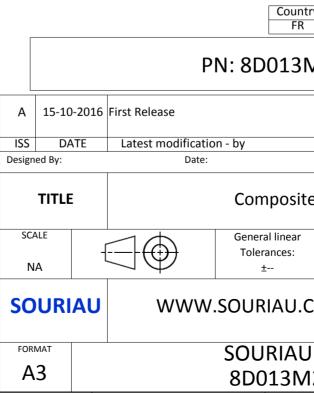

С

	Φ		A		
					4
(
IS EXA	AMPLE				3
whicer of t ndatio	non-conformit ch does not co he Parties or b on, technical n Jurisd	mply with by a third part otice.) liction & Cont			
^{∍r} 3M	26PN	Not Listed			2
		CUSTOME	R DRAWING	MOD N°	
site	ite Receptacle 8D series				
ar	NPRDS / PROJECT 859				
	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N° 6PN-C			SHEET 1/2	
	B		A		J

-	т	۵	<u>п</u>	m	D	0
		Contact Layout				Panel Cutou
4		26			Å	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
_		2#12 6#22D	1		₹ 24	
ω	Ctc A B C D E F 1 2	X Y 0 3.47 2.47 4.34 2.47 -4.34 0 -3.47 -2.47 -4.34 -2.47 -4.34 3.25 0 -3.25 0				Dim ØA ØA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendati
N						PN: 8D013N
					A 15-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
					TITLE SCALE NA	Composite General linear Tolerances:
-					SOURIA	U WWW.SOURIAU.C
				- (FORMAT A3	SOURIAU 8D013M2
	Н	G	l F	E	D	C

