



SB1545S

SCHOTTKY RECTIFIER

VOLTAGE 45 Volt **CURRENT** 15 Ampere

FEATURES

- Low power loss
- High efficiency operation
- Lead free in compliance with EU RoHS 2011/65/EU directive

MECHANICAL DATA


Case : P-600 molded plastic

Terminals : Axial leads, solderable per MIL-STD-750, Method 2026


Marking : Part number

Polarity : Color band denotes cathode end

Weight: 0.0719 ounces, 2.04 grams.



P-600 Unit : inch(mm)

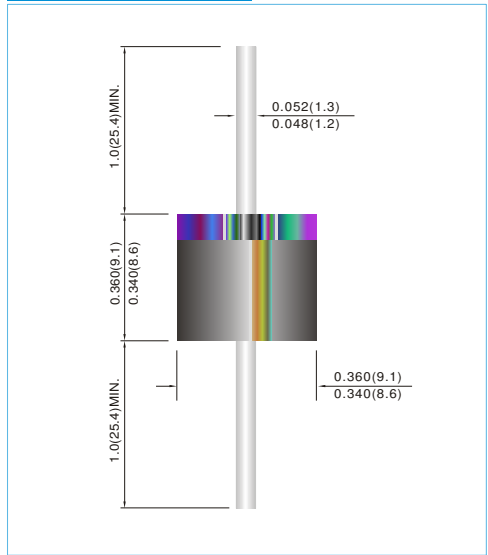

MAXIMUM RATINGS(T_A=25°C unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Maximum repetitive peak reverse voltage	V _{RRM}	45	V
Maximum rms voltage	V _{RMS}	32	V
Maximum dc blocking voltage	V _R	45	V
Maximum average forward rectified current	I _{F(AV)}	15	A
Peak forward surge current : 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	275	A
Typical thermal resistance (Note 1)	R _{θJL}	20	°C/W
Operating junction temperature range	T _J	-55 to + 150	°C
Storage temperature range	T _{STG}	-55 to + 150	°C
Junction temperature in DC forward current without reverse bias, t ≤ 1 h (Note 2)	T _J	200	°C

Note : 1. The testing condition of the thermal resistance (junction to lead) is based on 10 mm lead length between two 10cm x 10cm x 0.5mm copper pad

2.Meets the bypass diode thermal test required by IEC 61215 ed. 2

ELECTRICAL CHARACTERISTICS(T_A=25°C unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Breakdown voltage	V _{BR}	I _R =0.5mA T _J =25°C	45	-	-	V
Instantaneous forward voltage	V _F	I _F =1A T _J =25°C	-	0.31	-	V
		I _F =5A T _J =25°C	-	0.37	-	V
		I _F =15A T _J =25°C	-	0.43	0.5	V
		I _F =1A T _J =125°C	-	0.18	-	V
Reverse current	I _R	V _R =36V T _J =25°C	-	80	-	μA
		V _R =45V T _J =25°C	-	-	200	μA
		V _R =45V T _J =125°C	-	55	-	mA



SB1545S

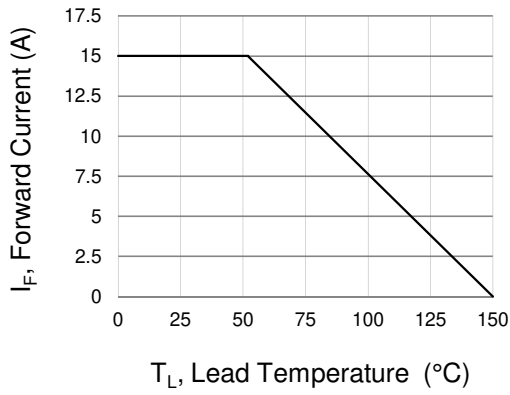


Fig.1 Forward Current Derating Curve

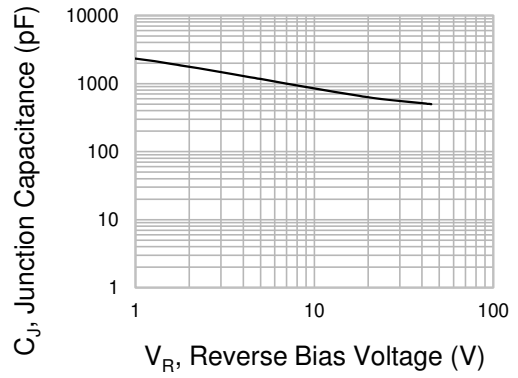


Fig.2 Typical Junction Capacitance

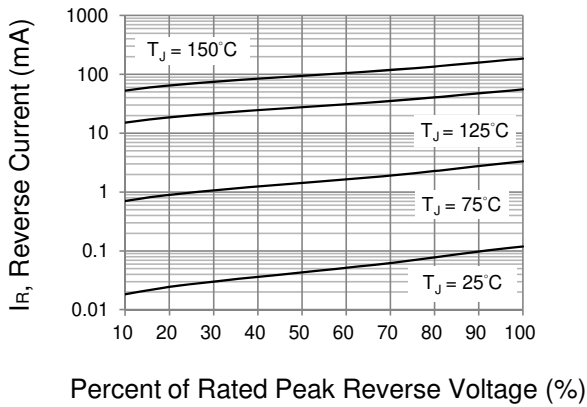


Fig.3 Typical Reverse Characteristics

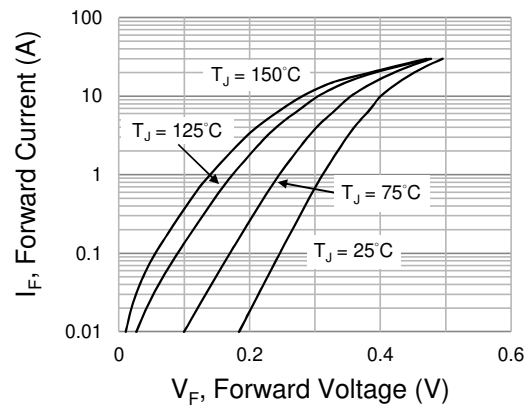


Fig.4 Typical Forward Characteristics



SB1545S

Part No_packing code_Version

SB1545S_AY_00001
 SB1545S_AY_10001
 SB1545S_B0_00001
 SB1545S_B0_10001
 SB1545S_R2_00001
 SB1545S_R2_10001

For example :

RB500V-40 **R2** **00001**



Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			



SB1545S

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.