


Power Triple Lock TE Internal #: 6-1971875-7 Rectangular Power Connectors, Housing, Cap, Wire-to-Wire, 15 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock

View on TE.com >



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > POWER TRIPLE LOCK High Temperature Caps

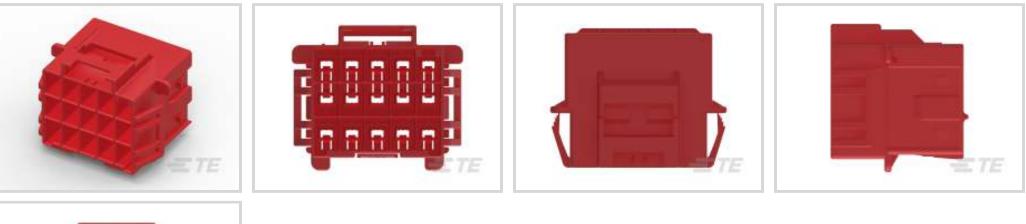



Rectangular Power Connector Type: Housing

Connector & Housing Type: Cap

Connector System: Wire-to-Wire

Number of Positions: 15

Centerline (Pitch): 6 mm [.236 in]

All POWER TRIPLE LOCK High Temperature Caps (44)

Features

Product Type Features

Rectangular Power Connector Type	Housing					
Connector & Housing Type	Сар					
Connector System	Wire-to-Wire					
Sealable	No					
Connector & Contact Terminates To	Wire & Cable					
Configuration Features						
Number of Positions	15					
Number of Power Positions	15					
Number of Rows	3					
Electrical Characteristics						
Operating Voltage	600 VDC					
Body Features						

Rectangular Power Connectors, Housing, Cap, Wire-to-Wire, 15 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



	4000
Cable Exit Angle	180°
Connector & Keying Code	В
Contact Features	
Contact Layout	Matrix
Contact Retention Within Housing	Without
Contact Type	Tab
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Panel Mount Feature	With
Panel Mount Feature Type	Latches
Connector Mounting Type	Panel Mount
Housing Features	
Centerline (Pitch)	6 mm[.236 in]
Housing Color	Red
Housing Material	Nylon

Dimensions

Panel Thickness (Recommended)	1 – 2 mm[.039 – .079 in]				
Connector Height	31.15 mm				
Row-to-Row Spacing	8.1 mm[.319 in]				
Usage Conditions					
Operating Temperature Range	-55 – 150 °C[-67 – 302 °F]				
Operation/Application					
Circuit Application	Power				
Identification Marking					
Circuit Identification Feature	With				
Industry Standards					
Glow Wire Material Rating	Material with GWIT \geq 775°C				
UL Rating	Recognized				
Agency/Standard	UL, VDE				
Approved Standards	UL E28476				

C For support call+1 800 522 6752

Rectangular Power Connectors, Housing, Cap, Wire-to-Wire, 15 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



UL Flammability Rating	UL 94V-0
Glow Wire Rating	GWT 850°C (Flame ≤ 30 sec)
Packaging Features	
Packaging Method	Carton
Other	
Power Connectors Comment	Complies with IEC 61984 Specification
EU RoHS Directive 2011/65/EU	Compliant
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


Rectangular Power Connectors, Housing, Cap, Wire-to-Wire, 15 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock








Also in the Series | Power Triple Lock

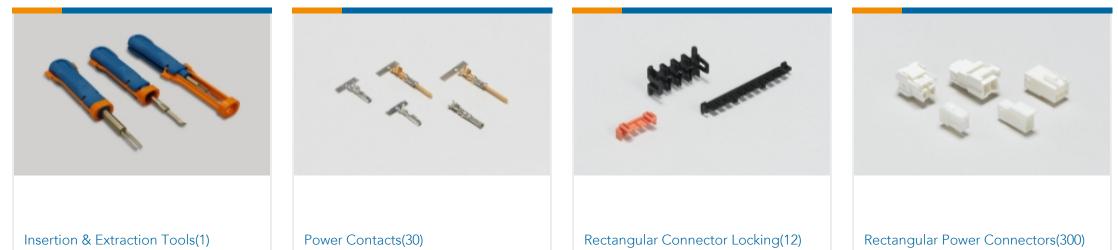

 130100	uction	10013(1)	I C

Customers Also Bought

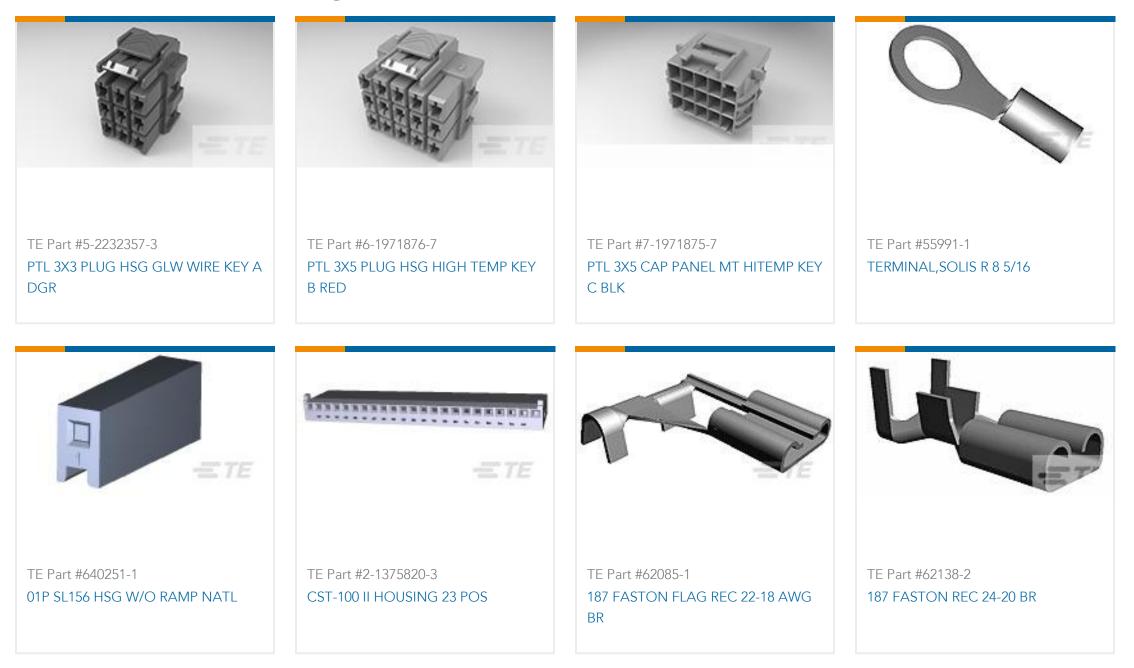

Rectangular Power Connectors, Housing, Cap, Wire-to-Wire, 15 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock





Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_6-1971875-7_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_6-1971875-7_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_6-1971875-7_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Product Specifications Application Specification

English

Product Environmental Compliance **Product Compliance**

English

Product Compliance

English

Agency Approvals **VDE** Certificate

English

VDE Certificate

English