

5

4

3


2

1


Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

No.1. contact



12,5 max.

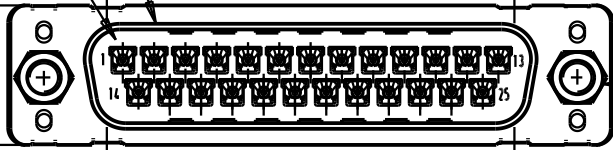



screw lock thread



Printed board layout  
component side

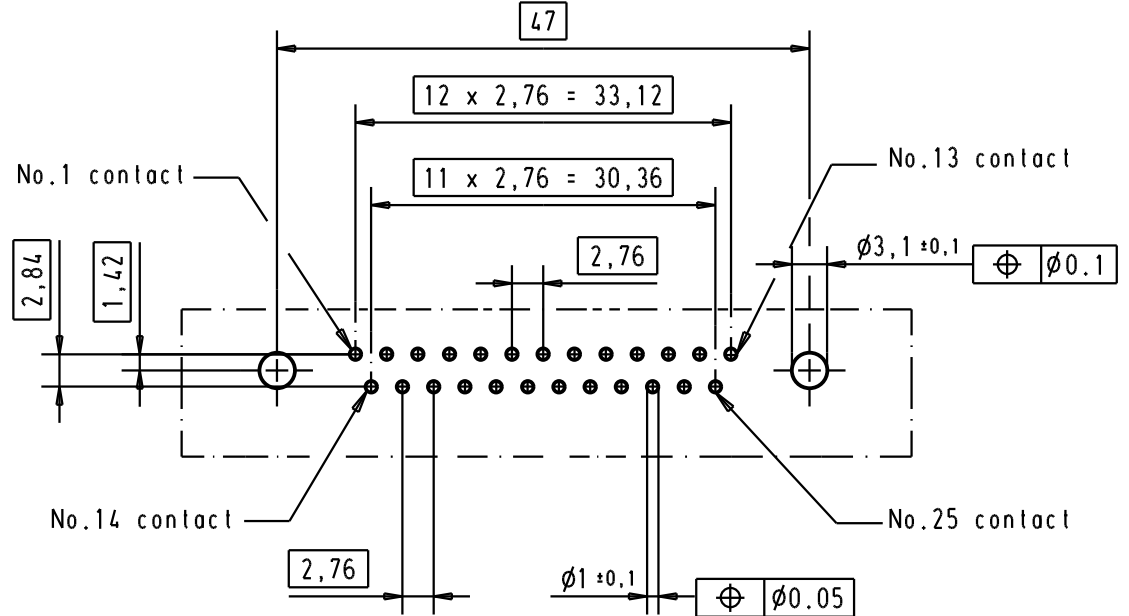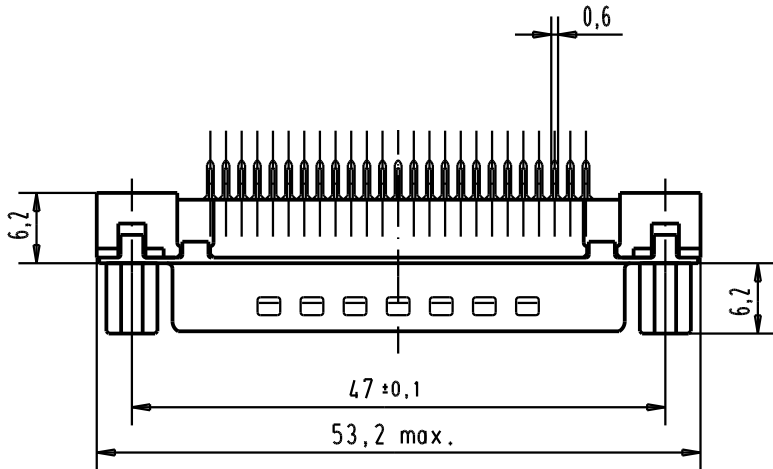

A

						Det.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, 25 poles, male, straight, with solder pins 3.7 and screw locks.	Moßstab/ Scale
						05/03/02	CV			1.5:1
						Insp.				
09 65 321 3703	4-40 UNC	1				Stand.				
09 65 321 6703	4-40 UNC	2	31892	22/04/04	JH	HARTING EURL F-95972 Paris				
09 65 321 7703	4-40 UNC	3	29723	05/03/02	CV					
Part number	Screw lock thread	Performance level	Mod.	Det.	Name			TB 09 65 321 x70x	Blatt/ Page	
						Sub.			3	