
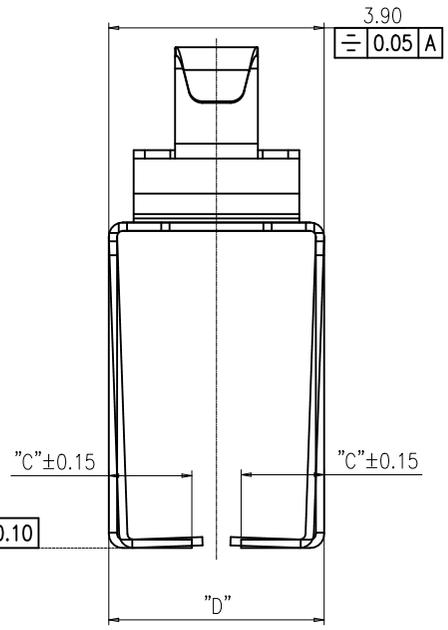
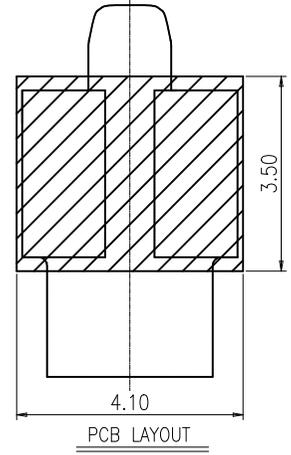
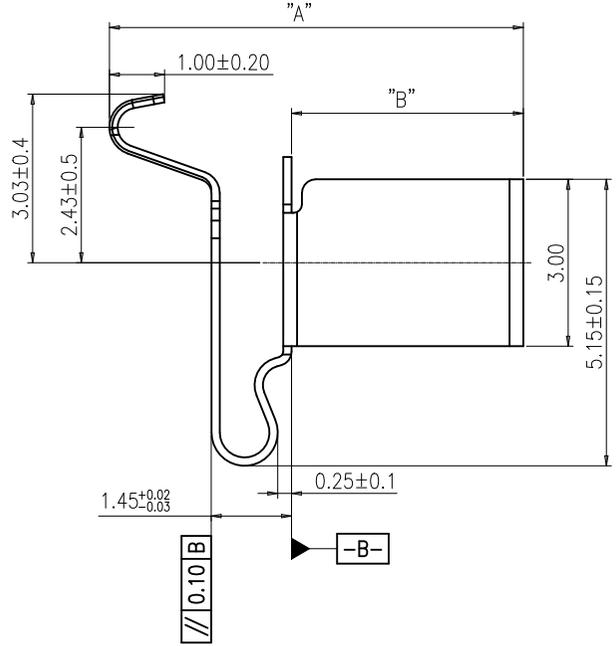


REV.	ECR/ECN No.	DESCRIPTION	DRAWN/DATE	CHECKED/DATE	APPROVED/DATE
F		UPDATE FRAME	Staven 2020-11-13	Staven 2020-11-13	Biao 2020-11-13
G	ECN2022112	UPDATE CPK SYMBOLS	Abner 2022-07-20	Staven 2022-07-20	Sam 2022-07-20

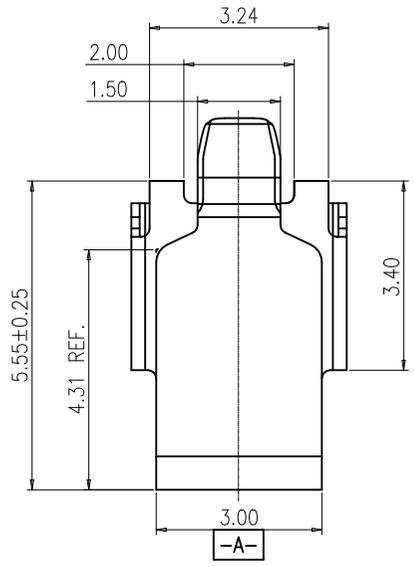

- NOTES:
- 1、 MATERIAL: SUS 304-H T=0.15mm;
 - 2、 ALLOW BURR 0.03mm Max.;
 - 3、 PLATING: Au 2u" SURFACE PLATING OVER CONTACT AREAS, Au 2u" SURFACE PLATING OVER SOLDER AREAS, Ni 40-120u" UNDER PLATING OVER ALL.
 - 4、 "▼" THE SYMBOL IS REPRESENTED AS CPK AND \bar{X} -R.

TABLE:

PART NUMBER	A	B	C	D
Z00D-4G7L1-11000	4.8 ^{+0.3} _{-0.05}	1.5 ^{+0.0} _{-0.3}	1.50	3.90 ⁺⁰ _{-0.20}
Z007-4G7L1-11000	5.2 ^{+0.3} _{-0.05}	1.9 ^{+0.0} _{-0.3}	1.05	3.90 ⁺⁰ _{-0.20}
Z00C-4G7L1-11000	7.5 ^{+0.3} _{-0.05}	4.2 ^{+0.0} _{-0.3}	1.50	3.90 ⁺⁰ _{-0.20}
Z00F-4G7L1-11000	9.0 ^{+0.3} _{-0.05}	5.7 ^{+0.0} _{-0.3}	0.80	3.90 ⁺⁰ _{-0.5}
Z00N-4G7L1-11000	6.3 ^{+0.3} _{-0.3}	3.0±0.15	1.50	3.90±0.15
Z00E-4G7L1-11000	4.0 ^{+0.3} _{-0.3}	0.7±0.15	1.50	3.90±0.15
Z00X-4G7L1-11000-E000	5.6 ^{+0.3} _{-0.3}	2.3±0.15	1.50	3.90±0.15



UNLESS OTHERWISE SPECIFIED TOLERANCES		ANGLE OF PROJECTION		 Amphenol Aorora Technology (Huizhou) Co.,Ltd	
X.	±0.30	X. *	± 5'		
X.X	±0.25	X.X *	± 4'	Customer Drw	
X.XX	±0.20	X.XX *	± 3'	DRAWN DATE Abner 2022-07-20	
X.XXX	±0.15	X.XXX *	± 2'	DESIGN DATE Abner 2022-07-20	
LINEAR DIMS		ANGLES DIMS		CHECKED DATE Staven 2022-07-20	
DWG NO.: A-S0198		APPROVED DATE Sam 2022-07-20		TITLE: SPRING	
MATERIAL SEE NOTES		FINISHED SEE NOTES		SIZE A4	PART NUMBER: SEE TABLE
				SCALE 1:1	UNIT : mm SHEET 1 OF 1



This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of AOR. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of AOR. © 2019 AOR

1:PACKING INTO REEL

PULL OUT DIRECTION

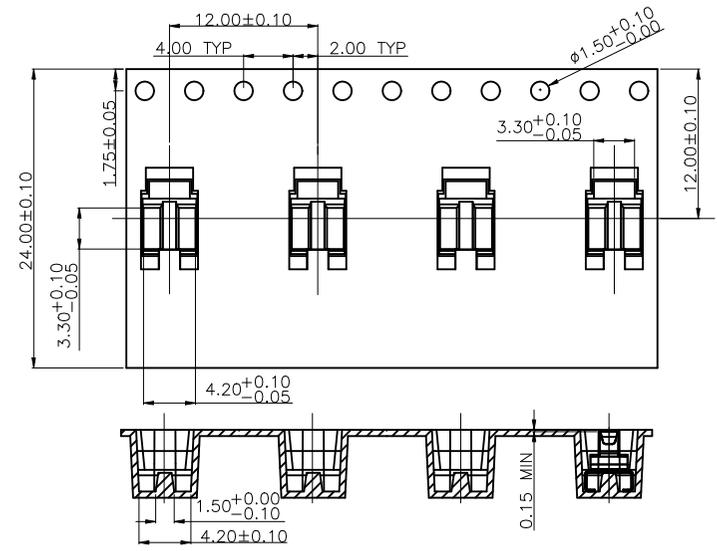

2:PACKING INTO OUTER BOX

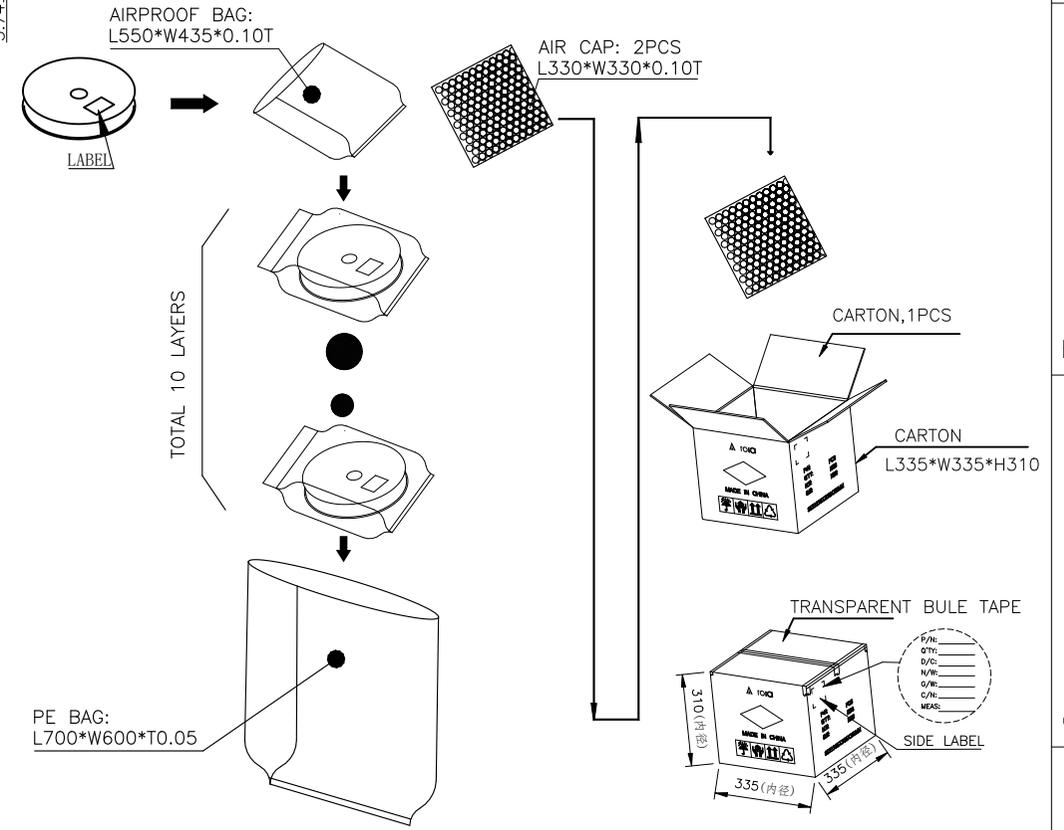


TABLE:

PART NUMBER	PCS/REEL	N REEL/BOX (TOL PCS)
Z00D-4G7L1-11000	1000	10REEL/BOX (10000pcs)
Z00D-4G7L1-11000-E000		
Z01L-4G7L1-11000-E000		
Z01L-4V7L1-11000-E000		

A

B

C

D

A

B

C

D



This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of AOR. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of AOR. © 2019 AOR

NOTES:

- MATERIAL:
 - CARRY TAPE:HIPS,T=0.50mm,COLOR:TRANSPARENT.
 - REEL:HIPS,BLUE.
 - SHIM:PE,CLEAR.
- PRIMARY PACKING:1000PCS/REEL.
- SECONDARY PACKING:10 REELS/CARTON ("TOTAL"=10*1000/CARTON).
- PEELING RESISTANCE: 0.1N~0.7N(10~70gf);
PEELING ANGLE: 165°~180°;
PEELING SPEED: 300mm/minutes.

UNLESS OTHERWISE SPECIFIED TOLERANCES			ANGLE OF PROJECTION	
X.	±0.15	X. *	± 1'	
X.X	±0.10	X.X *	± 0.5'	
X.XX	±0.05	X.XX *	± 0.5'	
X.XXX	±0.03	X.XXX *	± 1'	
LINEAR DIMS			ANGLES DIMS	
DWG NO.: A-H0106			DOG TYP	
MATERIAL			PACKING DWG.	
FINISHED			DRAWN DATE	
			DATE	
			DESIGN DATE	
			DATE	
			CHECKED DATE	
			DATE	
			APPROVED DATE	
			DATE	

Amphenol AORORA
Amphenol Aorora Technology (Huizhou) Co.,Ltd

TITLE: SPRING H4. 8

SIZE: A4

PART NUMBER: SEE TABLE

SCALE: 1:1

UNIT: mm

SHEET 1 OF 1

REV. F