


GRACE INERTIA 2.5 TE Internal #: 6-1971793-2 Housing, Plug, Wire-to-Wire, 6 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Blue, Mating Retention, Wire & Cable, GRACE **INERTIA 2.5**

View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings >

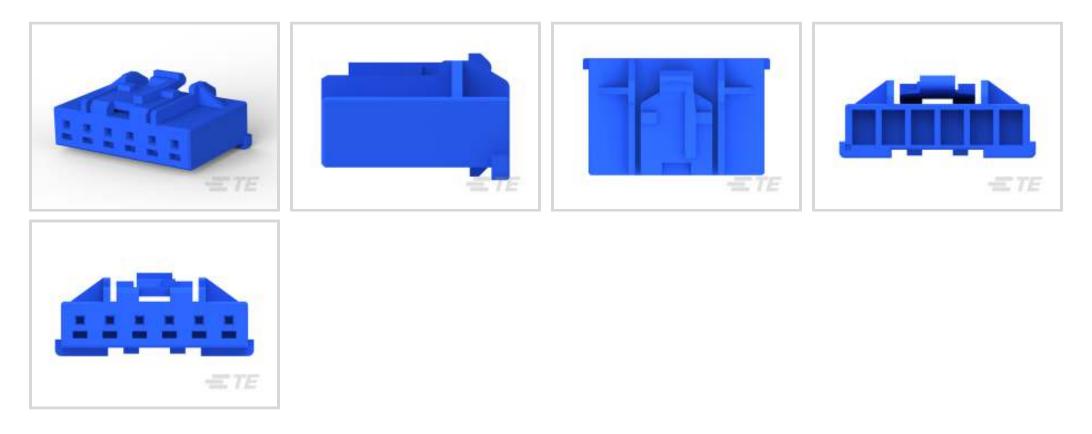

Glow Wire Sig GRACE INERTIA Plug

Connector Product Type: Housing Connector & Housing Type: Plug Connector System: Wire-to-Wire Number of Positions: 6 Centerline (Pitch): 2.5 mm [.098 in]

All Glow Wire Sig GRACE INERTIA Plug (20)



Features

Product Type Features

Connector Product Type	Housing					
Connector & Housing Type	Plug					
Connector System	Wire-to-Wire					
Sealable	No					
Connector & Contact Terminates To	Wire & Cable					
Configuration Features						
Number of Positions	6					
Number of Rows	1					
Electrical Characteristics						
Operating Voltage	50 VAC					
Body Features						

C For support call+1 800 522 6752

08/14/2023 09:46PM | Page 1

Housing, Plug, Wire-to-Wire, 6 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Blue, Mating Retention, Wire & Cable, GRACE INERTIA 2.5



Connector & Keying CodeBPrimary Product ColorBlueContact FeaturesContact Retention Within HousingWithoutContact LayoutInlineContact TypeTabContact Base MaterialCopper AlloyContact Current Rating (Max)3 A
Contact Features Contact Retention Within Housing Without Contact Layout Inline Contact Type Tab Contact Base Material Copper Alloy Contact Current Rating (Max) 3 A
Contact Retention Within HousingWithoutContact LayoutInlineContact TypeTabContact Base MaterialCopper AlloyContact Qurrent Rating (Max)3 A
Contact LayoutInlineContact TypeTabContact Base MaterialCopper AlloyContact Current Rating (Max)3 A
Contact TypeTabContact Base MaterialCopper AlloyContact Current Rating (Max)3 A
Contact Base MaterialCopper AlloyContact Current Rating (Max)3 A
Contact Current Rating (Max) 3 A
Termination Features
Termination Method to Wire & Cable Crimp
Mechanical Attachment
Strain Relief Without
Panel Mount Feature Without
PCB Mount Retention Without
Mating Retention Type Latch
Mating Retention With

Housing Features

Housing Entry Configuration	Both Ends Closed						
Housing Material	PA 66 GF						
Centerline (Pitch)	2.5 mm[.098 in]						
Dimensions							
Connector Length	15.7 mm[.618 in]						
Connector Height	5.88 mm[.231 in]						
Wire Size	.081 – .326 mm²						
Usage Conditions							
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]						
Operation/Application							
Circuit Application	Power & Signal						
Industry Standards							
Glow Wire Rating	Glow Wire						

Housing, Plug, Wire-to-Wire, 6 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Blue, Mating Retention, Wire & Cable, GRACE INERTIA 2.5



Packaging Features

Packaging Quantity	400
Packaging Method	Bag & Box
Other	

Mating with 6-1971798-X

Product Compliance

Discrete Wire Connector Comment

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

Housing, Plug, Wire-to-Wire, 6 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Blue, Mating Retention, Wire & Cable, GRACE INERTIA 2.5






Also in the Series | GRACE INERTIA 2.5



Rectangular Connector Locking(2)	Rectangular Power Connectors(35)	Wire-to-Board Connector Assemblies	Wire-to-Board Connector Contacts(4)
		& Housings(46)	

Customers Also Bought

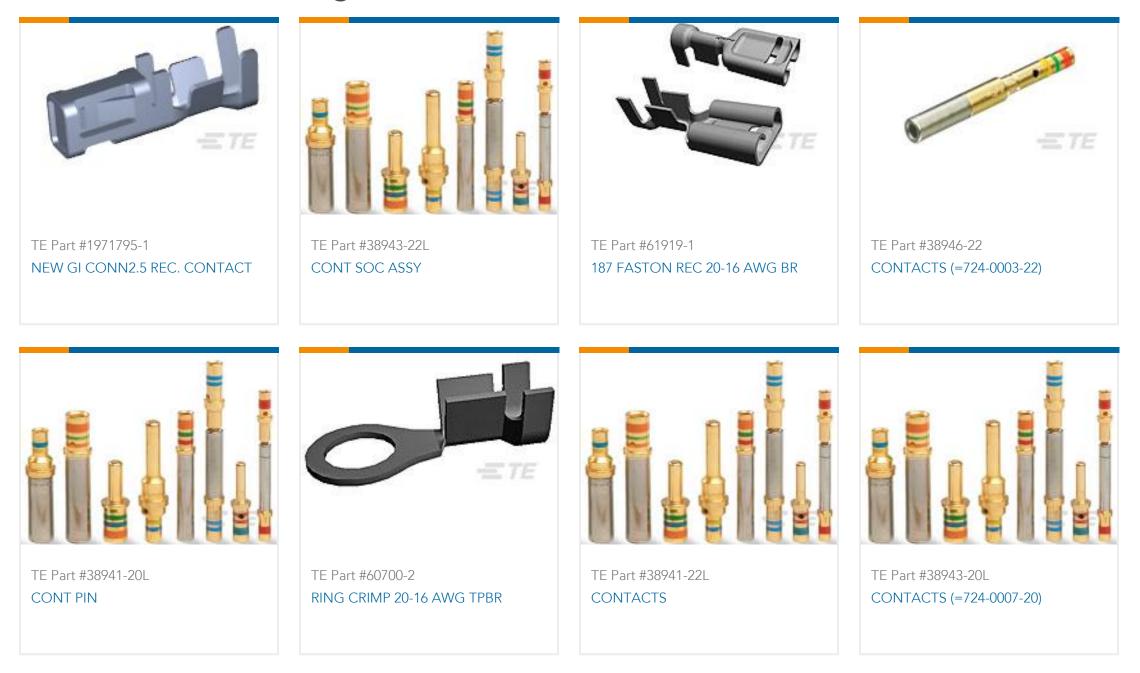

Housing, Plug, Wire-to-Wire, 6 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Blue, Mating Retention, Wire & Cable, GRACE INERTIA 2.5





Documents

Product Drawings NEW GI CONN2.5 PLUG HSG 6P Blu

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_6-1971793-2_J.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_6-1971793-2_J.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_6-1971793-2_J.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 5-1773465-3-GI2.5Flyer

English

7-1773465-8-GI2.5-ChineseFlyer

Product Specifications Application Specification

English