
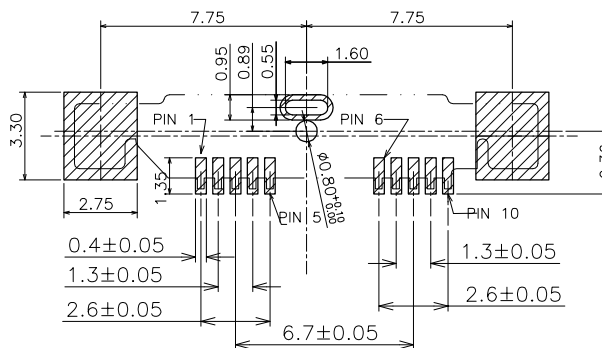





REVISION RECORD		
REV	DESCRIPTION	DRFT

H  
G  
F  
E  
D  
C  
B  
A

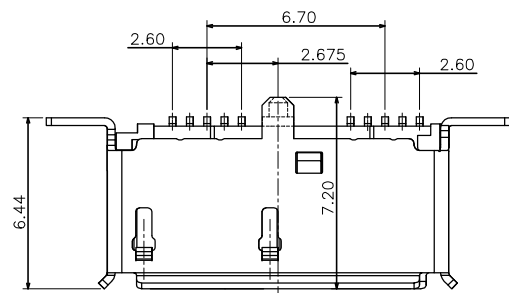


NOTES:

- MACHANICAL CHARACTERISTICS:  
 MATING FORCE: 1.30±0.30kgf.  
 UNMATING FORCE: 1.30±0.30kgf.  
 DURABILITY: 10000 CYCLES
- ELECTRICAL CHARACTERISTICS:  
 CURRENT RATING:1.5A  
 CONTACT RESISTANCE:30mΩMax.  
 DIELECTRICAL WITHSTANDING:100V AC/1min.  
 INSULATION RESISTANCE:100MΩ
- MATERIAL:  
 PLASTIC:LCP WITH 30% GF,UL 94V-0 ,BLACK.  
 TERMINAL:BRASS, T=0.15mm  
 TERMINAL PLATING:  
 50u" NICKEL UNDERPLATING OVER ALL,  
 15u" GOLD PLATING ON THE CONTACT AREA  
 100u" TIN PLATING ON THE SOLDER AREA  
 SHIELD: STEEL 0.3 THICKNESS.  
 SHIELD PLATING: 50~120u" NICKEL PLATING OVER ALL
- OTHERS:  
 OPERATION TEMPERATURE: -20°C to +80°C

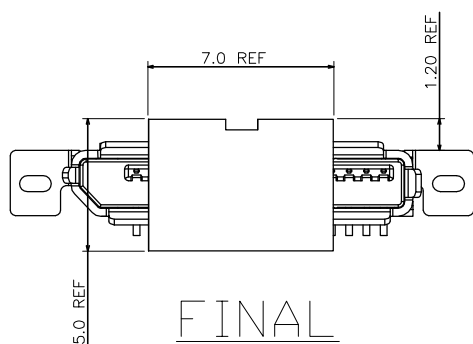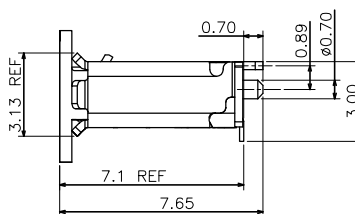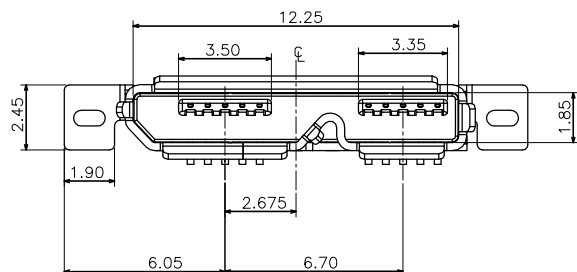

FINAL

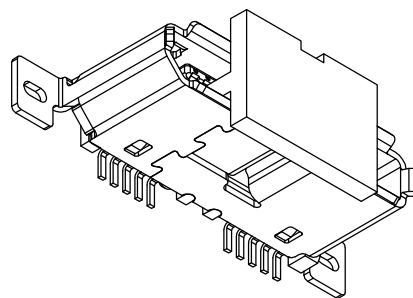

		DFTD Roy	DATE 11/20/2012			<b>RoHS Compliant</b>	
TOLERANCES EXCEPT AS NOTED MM . ± 0.35 .0 ± 0.25 .00 ± 0.15 .000 ± 0.05		CHKD	DATE	TITLE			
		APPVL	DATE	USB 3.0 Micro BF SMD SHORT BODY			
		MATERIAL :		DRAWING NO. E8110-033-01			
ANGLES: X*±1° X.X*±0.5°		QT'Y :		/PART NO. E8110-033-01		SIZE	REV
		FINISH :		DO NOT SCALE DRAWING		A3	01
THIRD ANGLE PROJECTION		SCALE : 1:1		SHEET 1		OF 1	