UNCONTROLLED DOCUMENT

SC:0.50

PART NUMBER


SSL-LX3054GD


REV. В

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	REDRAWN AND UPDATED SPECS.	7.25.95
В	FCN #10BRDR & REDRAWN IN 3D	4901

UNDER REVISION



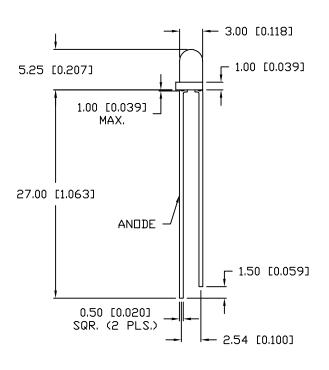



	ELECTRO-OPTICAL CH	ARACTERI	ISTICS TA=25°C		$I_f = 20mA$	
	PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
	PEAK WAVELENGTH		565		nm	
	FORWARD VOLTAGE		2.2	2.6	v_f	
	REVERSE VOLTAGE	5.0			v_r	I _r =100µA
Α	AXIAL INTENSITY		12		mcd	$I_f = 20 \text{mA}$
A	VIEWING ANGLE		60		2x theta	
	EMITTED COLOR:	GREEN				
	EPOXY LENS FINISH:	GREEN	DIFFUSED			

A LIMITS OF SAFE OPERATION AT 25°C

MAX	LIMITO
INITAA	UNITS
150	mA
25	mA
105	mW
-1.6	mW/*C
-40 TO +85	•C
+ 260	•C
	3 SEC. MAX
	150 25 105 - 1.6 - 40 TO +85

^{*} t<10uS

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX. = +0.00 (±0.002), LEAD SIZE=±0.05 (±0.002), LEAD SIZE=±0.05 (±0.002), LEAD SIZE=±0.05 (±0.003). MIN= +DECIMAL PRECISION MAX. = +0.00 (±0.003). MIN= +DECIMAL PRECISION MAX. =

REV. PART NUMBER В SSL-LX3054GD

> T-3mm (T-1) 565nm GREEN LED, GREEN DIFFUSED LENS.

INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



PALATINE, IL 60067-6976 PHONE: +1.847.359.2790

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY: APPROVED BY: DATE:

8.9.94 PAGE: 1 OF 1

SCALE: N/A