

UBX-310D

Intel® Celeron® Quad Core J1900 SoC with Multiple I/Os Fanless Box PC



Features

- Intel Bay Trail Quad Core J1900, 2.0GHz up to 2.42GHz
- DDR3L 1333 MHz SO-DIMM memory support up to 8GB
- Display : VGA, HDMI
- Support 1 x 2.5" SATA HDD Bay and 1 x mSATA
- Multiple I/O: 5 x USB 2.0, 1 x LAN, 3 x COM, 1 x RJ11, 1 x LPT
- Support 1 x Full-size MiniPCle
- Lockable DC jack design
- Optional VESA
- Supports WISE-PaaS/RMM and Embedded Software APIs



Introduction


UBX-310D, an intelligent, fanless embedded system powered by Intel® Celeron™ J1900 Quad Core low power processor with multiple I/O interface. The new generation Intel® Celeron™ processor brings 300% improvement on processing power and 300% on graphics performance than previous generation Intel® Atom™ processors. These low-power platforms provide energy-efficient and environmentally responsible solutions, and serve applications targeted at factory automation, machine automation, retail, kiosks, and self-service applications.

Specifications

Processor System	CPU	Intel Bay Trail Quad Core J1900
	Max. Speed	2.0 GHz, Turbo Boost up to 2.42GHz
	L2 Cache	2 MB
	BIOS AMI	AMI EFI 64Mbit SPI
Memory	Technology	Single channel DDR3L 1333MHz SDRAM
	Max. Capacity	8 GB
	Socket	1 x 204-pin SO-DIMM
Graphics	Controller	Integrated Intel HD Graphics engine
	HDMI	Up to 1920 x 1080 (@60Hz)
	VGA	Up to SXGA 2560 x 1600 (@60Hz)
Ethernet	LAN1	1 x RJ45, 10/100/1000 Mbps Realtek 8111E GbE
Audio	Interface	Realtek ALC269, Line-out and Mic-in
I/O Interface	Serial Port	3 x RS-232 ports, COM3 support 5V & 12V by order
	USB	5 x USB 2.0 port
	LPT	1 x LPT
	RJ11	1 x RJ11, cash drawer, 24V default, 12V buy order
Other	Watchdog	255-level timer interval, setup by software
Expansion	Mini PCIe1	1 x Full-size Mini PCIe, supports WWAN module
Storage	HDD	1 x SATA HDD Bay for 2.5" device
	Solid State Disk	1 x mSATA
Software Support	Microsoft Windows	Windows Embedded POSReady 7, Windows 7 Pro Embedded, Windows 8.1 Pro Embedded (64-bit)
	Linux	Linux Kernel 3.13 or above (by project)
Power Requirements	Power Type	ATX mode
	Power Input Voltage	12 VDC, ± 10%
	Power Adapter	AC to DC, DC12V / 5A, 60W (Optional)
Mechanical	Construction	Steel
	Dimensions (W x H x D)	245 x 45 x 185 mm
	Weight	2.0 kg
	Operating Temperature	With 2.5-inch hard disk 0 ~ 40° C (32 ~ 104° F) with 0.7 m/s air flow
Environment	Storage Temperature	-40 ~ 85° C (-40 ~ 185° F)
	Relative Humidity	90% @ 40° C (non-condensing)
	Vibration During Operation	With HDD: 0.5 Grms, IEC 60068-2-64, random, 5-500Hz, 3 axes, 1hr/axis
	Shock During Operation	With HDD: 10 G, IEC 60068-2-27, half sine, 11 ms duration
	EMC	CCC/BSMI/CE/FCC
	Safety	CCC/BSMI/CB/UL

Dimensions

Unit: mm

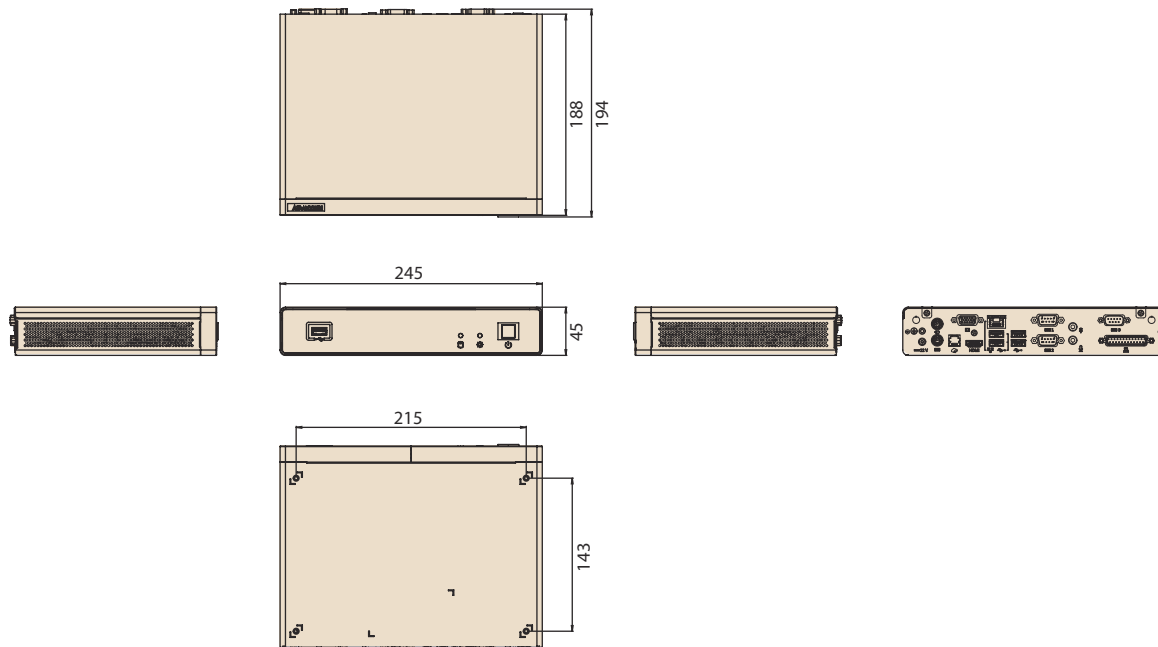


Ordering Information

Part No.	Description
UBX-310D-LOB0E	Intel Celeron J1900, Fanless, RJ11, LPT
UBX-310D-LHB0E	Intel Celeron J1900, Fanless, RJ11, LPT with 2G RAM, 500G HDD

Installation Accessory

Part No.	Description
HIP-33B-MOUNT1E	VESA MOUNT

Fully- Integrated I/O

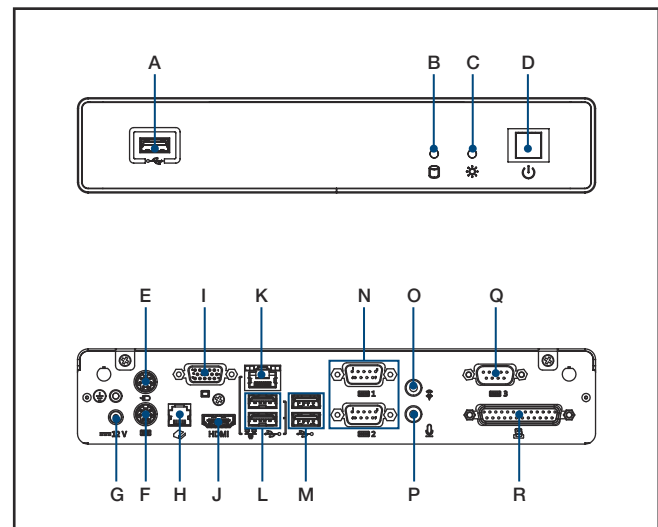

- | | |
|-----------------|-------------|
| A. USB | J. HDMI |
| B. HDD LAMP | K. LAN |
| C. POWER LAMP | L. USBx2 |
| D. POWER SWITCH | M. USBx2 |
| E. MOUSE | N. COM 1/2 |
| F. KEYBOARD | O. LINE OUT |
| G. DC IN | P. MIC |
| H. RJ11 | Q. COM 3 |
| I. VGA | R. LPT |