



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

2000 MHz Cavity Band Pass Filter

Part Number: AE2000B11604



Electrical Specifications

Center Frequency: 2000 MHz
1dB Bandwidth: 20 MHz
Insertion Loss: 1.5dB Max.
Return Loss: 14dB Min.
Rejection1: ≥50dB @ 1600 MHz
Rejection2: ≥ 50dB @ 2400 MHz
Impedance: 50 Ohms
Power Handling: 0.1 W


Mechanical

Mounting Method: Threaded Holes M2.5 X 6mm DP
Connector Type: SMA(F)
Dimensions: 2.13 X 1.26 X 0.95 in.

Environmental

Operating Temperature: -40°C to +70°C
Storage Temperature: -55°C to +85°C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200Hz

Outline Drawing:

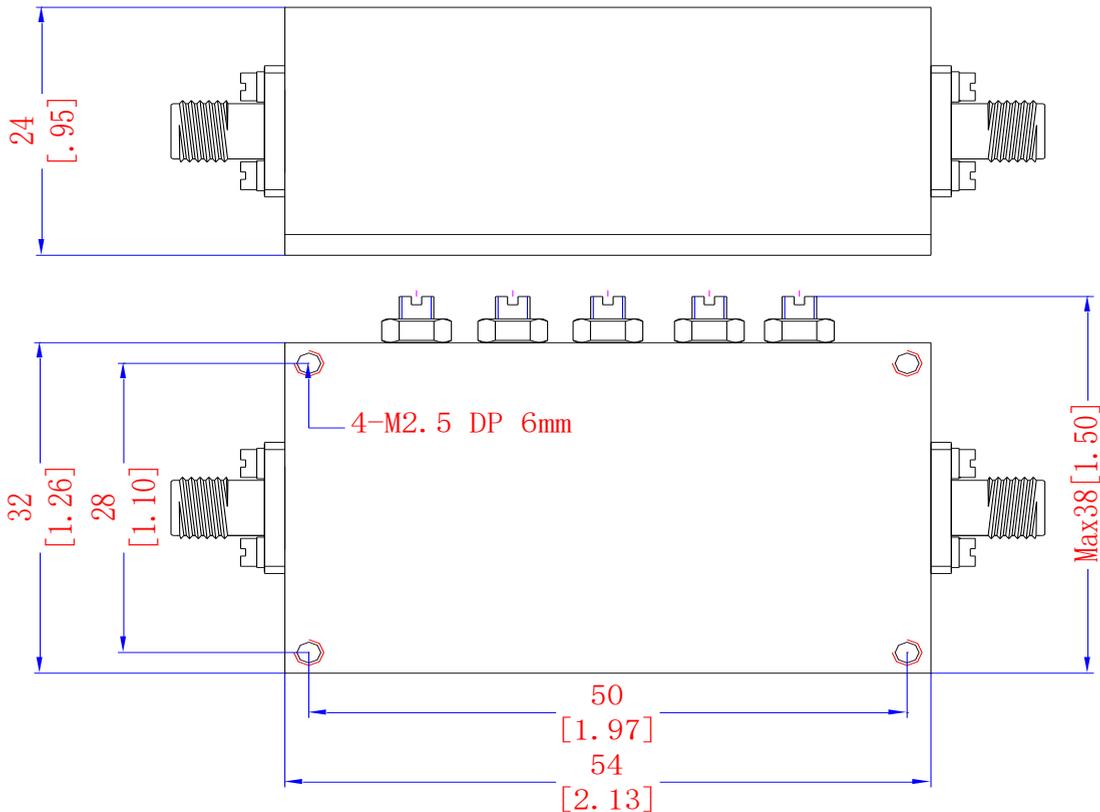

Tolerance: +/-0.01 inches [+/- 0.3mm]

Angles: +/- 1 Deg.

*Tolerance as shown unless otherwise specified in the datasheet electrical specification tables above.

*When max dimensions are called out the above tolerances do not apply as long as it is under the max call out.


70 Outwater Lane Phone: (973) 772-4242
Garfield, NJ 07026 Fax : (973) 321-3941

Email: sales@anatechelectronics.com
Web: www.anatechelectronics.com



Simulation Plot:

RFQ-20190208-BPF-2000 MHz-20 MHz

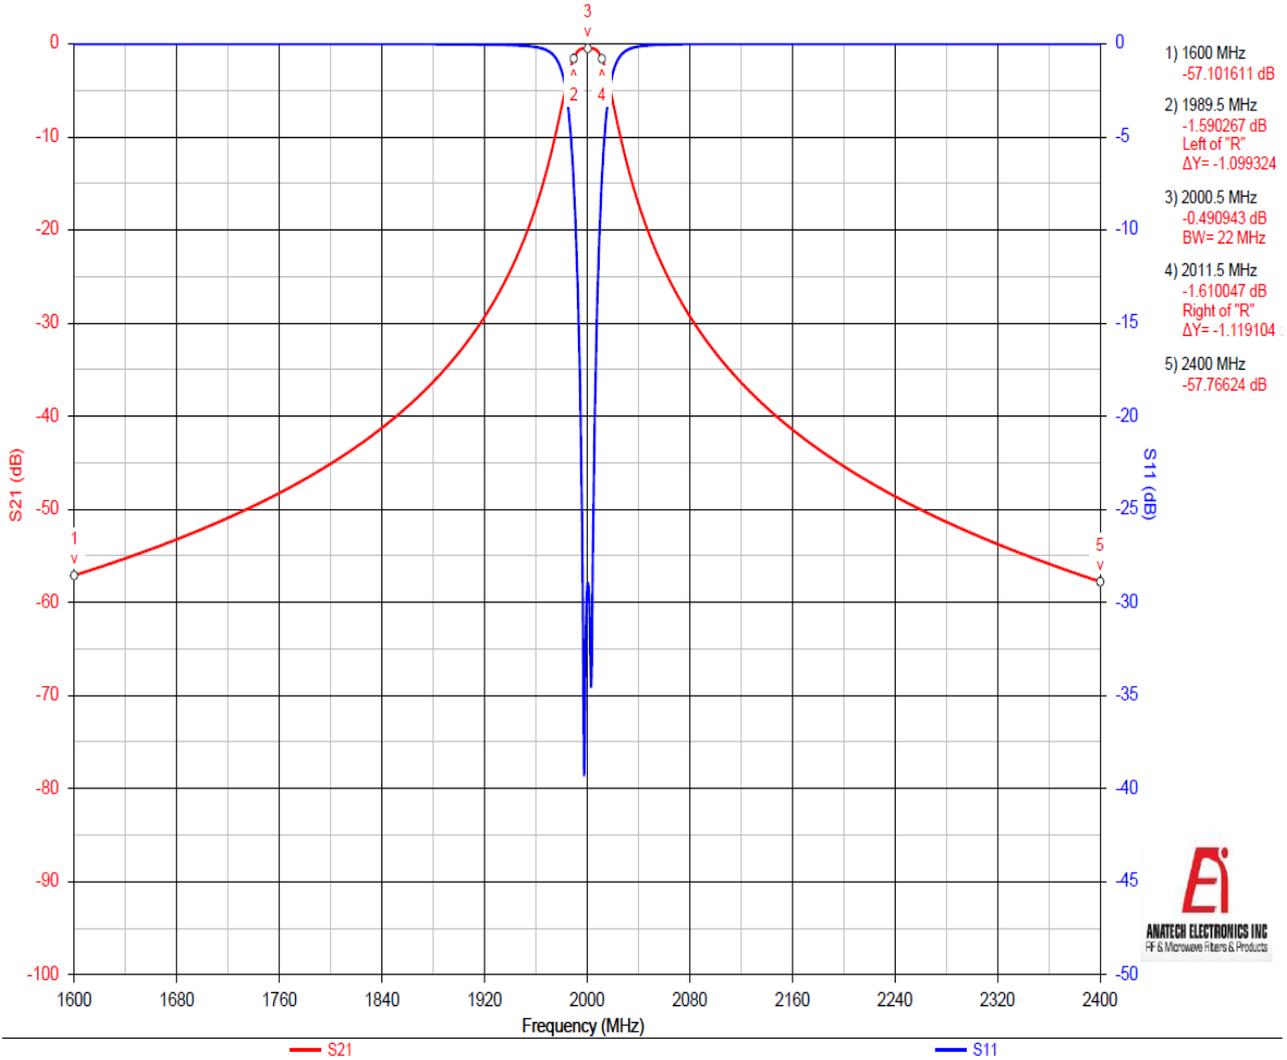

Note: This is a simulation Plot. Actual response plot might differ once product is manufactured.