
REVISION E

RECOMMENDED PCB LAYOUT FOR THE SQW (DOUBLE) P.C. BOARD

9/29/2011 ECN-163548

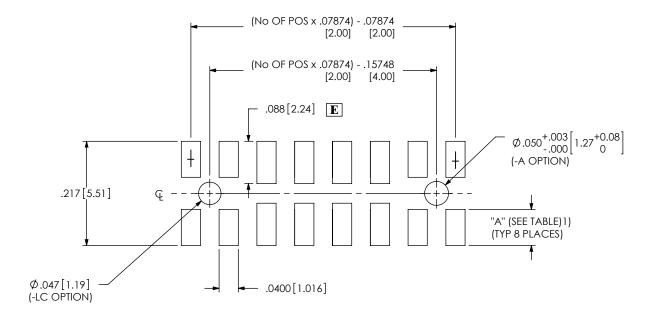

 \mathbf{E}

TABLE 1	
POSITION	"A"
ALIGNMENT PIN (-A)	.075 [1.91]
LOCKING CLIPS (-LC)	.075 [1.91]
NEITHER -A OR -LC	.088 [2.24]

ALL DIMENSIONS ARE SYMMETRIC ABOUT THE CENTERLINE.

PROPRIETARY NOTE


THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.



REVISION D

RECOMMENDED STENCIL LAYOUT FOR THE SQW (DOUBLE) P.C. BOARD

NOTE: STENCIL TO BE .0060[.152] THICK.

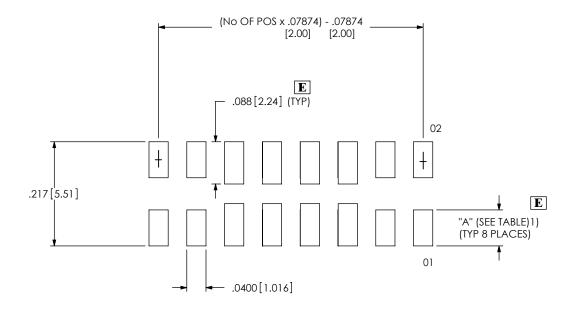

ALL DIMENSIONS ARE SYMMETRIC ABOUT THE CENTERLINE.

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

