




TE Internal #: 2198721-1
 SFP, SFP+ & zSFP+, Cage Assembly, Data Rate (Max) 28 Gb/s,
 Elastomeric Gasket, EMI Enhanced, With Lightpipe, 1 x 4, Dual
 Round, Standard, Standard

[View on TE.com >](#)

Connectors > Pluggable IO Connectors & Cages > SFP, SFP+ & zSFP+ > zSFP+ Cage Assembly: Elastomeric Gasket

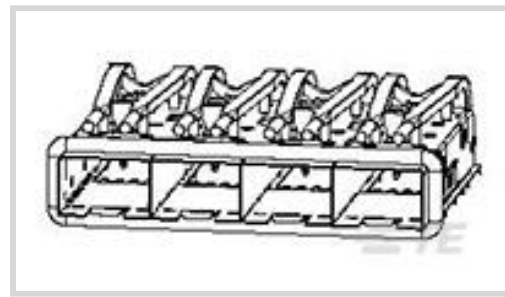

Pluggable I/O Product Type: **Cage Assembly**
 Data Rate (Max): **28 Gb/s**
 EMI Containment Feature Type: **Elastomeric Gasket**
 Pluggable I/O Applications: **EMI Enhanced**
 Lightpipe Options: **With Lightpipe**

[All zSFP+ Cage Assembly: Elastomeric Gasket \(8\)](#)

Features

Product Type Features

| | |
|-----------------------------------|-----------------------|
| Form Factor | zSFP+ |
| Cage Type | Ganged |
| Pluggable I/O Product Type | Cage Assembly |
| Lightpipe Options | With Lightpipe |
| Connector System | Cable-to-Board |
| Sealable | Yes |
| Connector & Contact Terminates To | Printed Circuit Board |

Configuration Features

| | |
|---------------------------|------------|
| Port Matrix Configuration | 1 x 4 |
| Lightpipe Configuration | Dual Round |
| Lightpipe Style | Standard |
| Lightpipe Profile | Standard |
| Number of Ports | 4 |

Electrical Characteristics

| | |
|-----------------|---------|
| Data Rate (Max) | 28 Gb/s |
|-----------------|---------|

Termination Features

| | |
|--------------------------------|------------------|
| Termination Post & Tail Length | 2.05 mm[.081 in] |
|--------------------------------|------------------|



Termination Method to Printed Circuit Board

Through Hole - Press-Fit

Mechanical Attachment

Connector Mounting Type

Board Mount

Housing Features

Cage Material

Nickel Silver Alloy

Dimensions

PCB Thickness (Recommended)

3 mm [.118 in]

Usage Conditions

Operating Temperature Range

-55 – 105 °C [-67 – 221 °F]

Operation/Application

Heat Sink Compatible

No

For Use With Pluggable I/O Products

zSFP+ SMT Connector

Pluggable I/O Applications

EMI Enhanced

Circuit Application

Signal

Packaging Features

Packaging Method

Tray

Other

EMI Containment Feature Type

Elastomeric Gasket

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU

Compliant

EU ELV Directive 2000/53/EC

Compliant

China RoHS 2 Directive MIIT Order No 32, 2016

No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JUNE 2023 (235)
 Candidate List Declared Against: JAN 2021 (211)
 Does not contain REACH SVHC

Halogen Content

Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-C11-N490333
QSFP28-Four SFP+ Cable Assembly:
30 AWG



TE Part # CAT-C11-N490325
QSFP28-Four SFP+ Cable Assembly:
26 AWG



TE Part # CAT-C11-N4901114
SFP28 to SFP28 Cable Assembly: 30
AWG



TE Part # CAT-C11-N49011
SFP28 to SFP28 Cable Assembly: 26
AWG



TE Part # CAT-Q17-N49011
QSFP56-Four SFP56 Cable Assembly:
30 AWG



TE Part # CAT-Q17-N490333
QSFP56-Four SFP56 Cable Assembly:
26 AWG



TE Part # 4-2821222-5
SFP56 DIRECT ATTACH CA, 2M,
30AWG



TE Part # 4-2821224-5
SFP56 DIRECT ATTACH CA, 3M,
26AWG



TE Part # 4-2334985-2
SFP56 DIRECT ATTACH CA, 1M,
32AWG



TE Part # 2334985-2
SFP28 DIRECT ATTACH CA, 1M,
32AWG



TE Part # CAT-C11-N490111
SFP28 to SFP28 Cable Assembly: 28
AWG



TE Part # 2215070-6
ASSY, SEATING TOOL, 1 X 4

Customers Also Bought



Documents

Product Drawings

[CAGEASSY,W/LIGHTS,PRESSFIT,1X4,zSFP+](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_2198721-1_B.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2198721-1_B.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2198721-1_B.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[zSFP+ Interconnect Brochure](#)

English

Product Specifications

[Product Specification](#)

English

Instruction Sheets

[Instruction Sheet \(U.S.\)](#)



English

[Instruction Sheet \(U.S.\)](#)

English