



### Electrical specifications

**Cutoff Frequency (FC):** 118 MHz  
**Passband:** 84-152 MHz  
**Insertion loss over Passband:** 3 dB Min  
**Return loss over Passband:** 15 dB Max  
**Rejection @ 166 MHz:** 40 dB Max


### Mechanical

**Mounting Method:** SMA (F)  
**Dimensions:** 4 x 0.6 x 0.6 Inches

### Environmental

**Operating Temperature:** -40 to +85° C  
**Storage Temperature:** -55 to +95° C

### Outline Drawing:

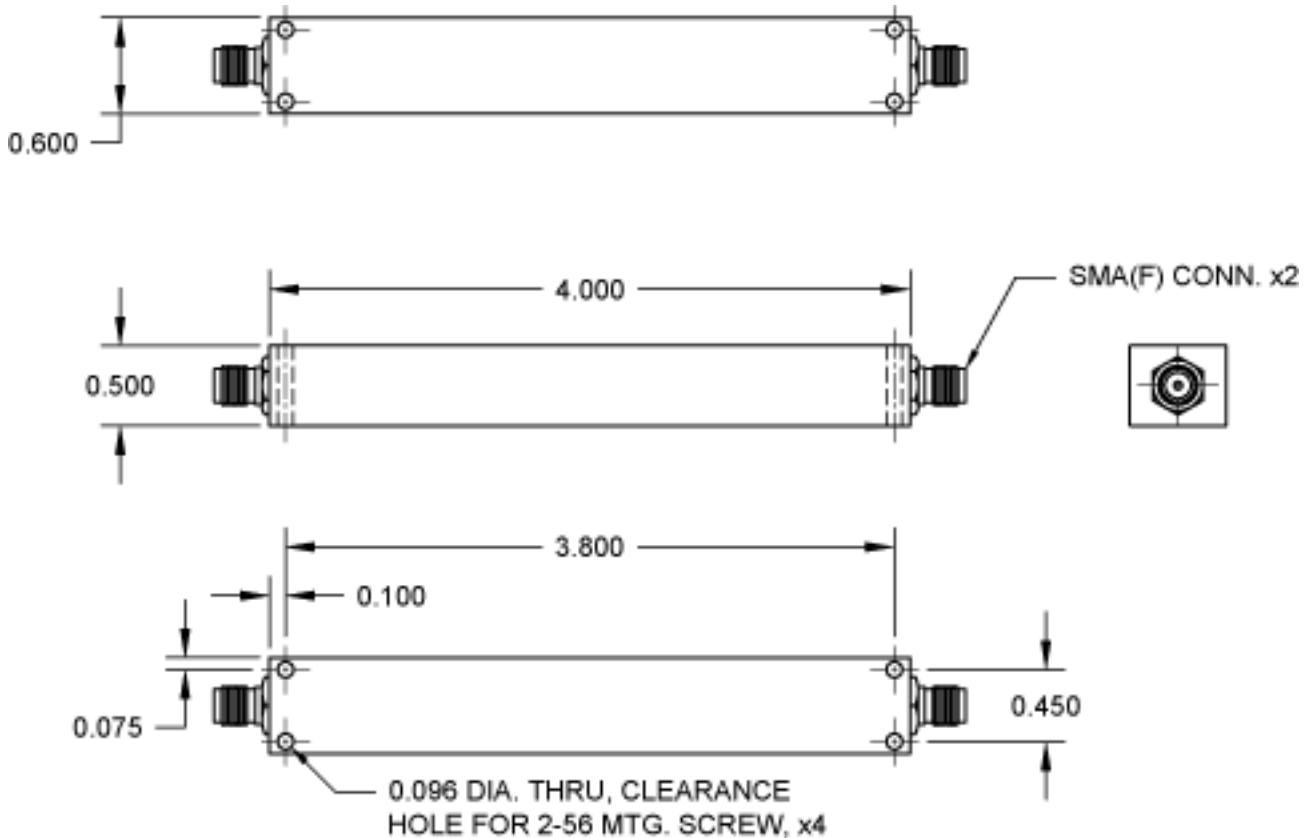



**Response Plot**

