ROHM SEMICONDUCTOR

简体中文 | 繁體中文 | 한국어 | 日本語

Text Size A　A　Site Search ▼ [　　　　　] Search ?

HOME, Products | Applications | New Products | Company Profile | Sales | Contact us　　　Site Map
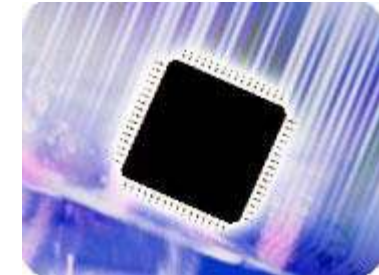
HOME, Products > ICs > Audio ICs > USB Host Audio Decoder ICs

ICs

EEPROMs

Clock Generators

Voltage Detector ICs

Motor Drivers

Power Management ICs

LED / LCD Drivers

Sensor ICs

Operational Amplifiers / Comparators

Analog Switches / Logics

D / A Converters

IT Equipment / Interface ICs

Video and Imaging ICs

Audio ICs

Wireless Audio Link IC Series for FM Transmitter

FM Radio One Chip ICs

High Performance Class-D Speaker Amplifier Series

Ultra Small Headphone

USB Host Audio Decoder ICs

ROHM's USB host audio decoder ICs integrate a USB 2.0 host, SD memory card controller, AAC decoder, WMA decoder, MP3 decoder, Audio DAC amp, and a system controller all on a single chip, allowing easy playback of music stored in USB flash memory using an audio player. They can be easily added to virtually any audio device (i.e. CD player, mini-component stereo, portable player, car stereo) for greater functionality.

PRO

*Put the mouse on the icon to see further details.

Specification	Part No.	Package	Function
MP3 Format			
USB MP3	**NEW** **BU9428KV**	VQFP64	32MB~2TB / CONT ROLLER / FAT16 FAT32 / TAG / RANDOM ▶ / REPEAT ▶ / Analog LINE / I²S SPDIF / I²C / SOUND EFFECT
MP3 Format + SD Memory Card			
USB SD MP3	**BU9435KV**	VQFP64	32MB~2TB / CONT ROLLER / FAT16 FAT32 / TAG / RANDOM ▶ / REPEAT ▶ / Analog LINE / I²S SPDIF / I²C / SOUND EFFECT
WMA / MP3 Format + SD Memory Card			
USB SD MP3 WMA	**NEW** **BU9437AKV**	VQFP64	32MB~2TB / CONT ROLLER / FAT16 FAT32 / TAG / RANDOM ▶ / REPEAT ▶ / RESUME ▶ / Analog LINE / I²S SPDIF / I²C / SOUND EFFECT
AAC / WMA / MP3 Format + SD Memory Card			
USB SD MP3 WMA AAC	**NEW** **BU9438KV**	VQFP64	32MB~2TB / CONT ROLLER / FAT16 FAT32 / TAG / RANDOM ▶ / FF/FR ▶ / REPEAT ▶ / RESUME ▶ / Analog LINE / I²S SPDIF / I²C / SOUND EFFECT

◼ ROHM Inter Shopping

◼ Approach to

◼ RoHS direct

◼ Contact us

◼ Catalog Req

Discrete Semiconductors

Opto Electronics

Inquiries concerning our products

USB Host Audio Decoder ICs

Part No.	Operating voltage (V) Core	Operating voltage (V) I/O	USB	SD	Serial interface	Display information	MP3	WMA	AAC	Audio output Analog	Audio output Digital	Package	RoHS
NEW BU9428KV	1.40 to 1.60	3.0 to 3.6	USB2.0 Full Speed	—	I²C BUS	Folder number File number Playing time Folder name File name TAG (Artist Alubum Title)	MPEG1,2,2.5 LAYER1,2,3	—	—	Line	I²S SPDIF	VQFP64	Yes
BU9435KV	1.40 to 1.60	3.0 to 3.6	USB2.0 Full Speed	MMC SD miniSD microSD SDHC	I²C BUS		MPEG1,2,2.5 LAYER1,2,3	—	—	Line	I²S SPDIF	VQFP64	Yes
NEW BU9437AKV	—	3.0 to 3.6	USB2.0 Full Speed	MMC SD miniSD microSD SDHC	I²C BUS		MPEG1,2,2.5 LAYER1,2,3	WMA9Standard	—	Line	I²S SPDIF	VQFP64	Yes
NEW BU9438KV	—	3.0 to 3.6	USB2.0 Full Speed	MMC SD miniSD microSD SDHC	I²C BUS		MPEG1,2,2.5 LAYER1,2,3	WMA9Standard	MPEG4AAC-LC	Line	I²S SPDIF	VQFP64	Yes

USB Host Audio Decoder ICs | Audio ICs | ICs | ROHM CO., LTD.

Page 3 of 3

Passive Components

**Modules
(Sub Systems)**

Energy Saving!
ECO Devices
Product Information →

Top of Page

Privacy Policy   Terms & Conditions