


MGPWT-00410-P	REV	
1879564-1	BA	

Product Description **200kHz Discontinuous Mode Flyback Transformer**
10-50VDC Input: 15V @ 160mA / 12V @ 920mA / 7V @ 600mA
Outputs

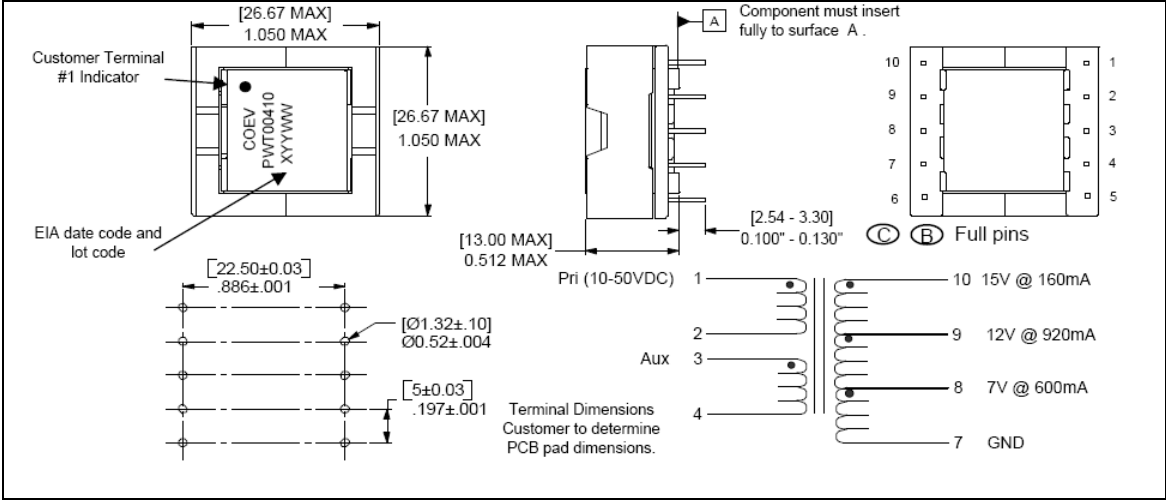

Primary Units are in inches millimetres in brackets

Electrical Specifications at +20°C unless noted otherwise

Test	Limits	Unit	Tol	Notes
Inductance	4.00	µH	±10%	1-2, 200kHz, 150mVAC, Ls.
Leakage Inductance	0.30	µH	Max.	1-2 tie(3+4+7+8+9+10), 200kHz, 10mAAC, Ls.
DC Resistance	0.038	Ω	Max.	Pins 1 - 2
DC Resistance	0.065	Ω	Max.	Pins 10 - 9
DC Resistance	0.049	Ω	Max.	Pins 9 - 8
DC Resistance	0.033	Ω	Max.	Pins 8 - 7
DC Resistance	0.617	Ω	Max.	Pins 3 - 4
Turns Ratio	1.20 : 1.00	--	±3%	(1-2) : (10-9), 100kHz, 100mVAC.
Turns Ratio	1.50 : 1.00	--	±3%	(1-2) : (9-8), 100kHz, 100mVAC.
Turns Ratio	1.00 : 1.00	--	±3%	(1-2) : (8-7), 100kHz, 100mVAC.
Turns Ratio	0.46 : 1.00	--	±3%	(1-2) : (3-4), 100kHz, 100mVAC.
Dielectric	1650	VAC	500µA	1-10 tie(2+3), 1 second test, 500µA maximum leakage current.
Dielectric	300	VAC	500µA	1-3, 1 second test, 500µA maximum leakage current.
Interwinding Capacitance	40.00	pF	Max.	1-10 tie(1+2, 10+7), 200kHz, 100mVAC, Cs.
Interwinding Capacitance	40.00	pF	Max.	1-9 tie(1+2, 9+7), 200kHz, 100mVAC, Cs.
Interwinding Capacitance	40.00	pF	Max.	1-8 tie(1+2, 8+7), 200kHz, 100mVAC, Cs.

Terminal plating is Hot Dipped SnAgCu over Ni
265°C Maximum wave solder temperature per J-STD-020
Operating Temperature Range: -40°C to +85°C



The information contained in this drawing is the sole property of Tyco Electronics. Any reproduction or use without the written permission of Tyco Electronics is prohibited.
Specifications subject to change without notice. For latest revision visit <http://www.tycoelectronics.com>