
6-1123723-7 - ACTIVE

Economy Power

TE Internal #: 6-1123723-7 PCB Mount Header, Vertical, Wire-to-Board, 7 Position, 3.96 mm [. 156 in] Centerline, Partially Shrouded, Tin, Through Hole - Solder, Economy Power

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles

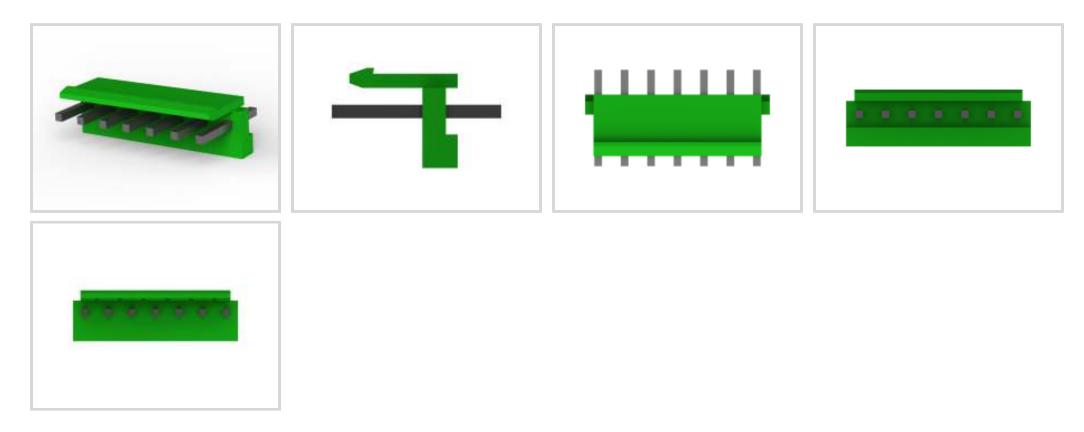

Connector System: Wire-to-Board

Number of Positions: 7

Number of Rows: 1

Centerline (Pitch): 3.96 mm [.156 in]

PCB Mount Orientation: Vertical

Features



Product Type Features

Connector System	Wire-to-Board	
Header Type	Partially Shrouded	
Sealable	No	
Connector & Contact Terminates To	Printed Circuit Board	
PCB Connector Assembly Type	PCB Mount Header	
Configuration Features		
Connector Contact Load Condition	Fully Loaded	
Number of Positions	7	
Number of Rows	1	
PCB Mount Orientation	Vertical	
Electrical Characteristics		
Operating Voltage	250 VAC	
Body Features		
Connector Profile	Low	

PCB Mount Header, Vertical, Wire-to-Board, 7 Position, 3.96 mm [.156 in] Centerline, Partially Shrouded, Tin, Through Hole - Solder, Economy Power



Primary Product Color	Green	
Contact Features		
Contact Mating Area Length	7.7 mm[.3 in]	
Mating Square Post Dimension	1.14 mm[.045 in]	
PCB Contact Termination Area Plating Material Thickness	1 μm[39.7 μin]	
Contact Layout	Inline	
Contact Underplating Material Thickness	.8 μm[31.49 – 70.86 μin]	
Contact Mating Area Plating Material Thickness	1 μm[39.37 μin]	
PCB Contact Termination Area Plating Material Finish	Matte	
Contact Shape & Form	Square	
Contact Mating Area Plating Material Finish	Matte	
Contact Underplating Material	Nickel	
PCB Contact Termination Area Plating Material	Tin	
Contact Base Material	Brass	
Contact Mating Area Plating Material	Tin	
Contact Type	Pin	
Contact Current Rating (Max)	7.5 A	



Termination Features

Square Termination Post & Tail Dimension	1.14 mm[.045 in]	
Termination Post & Tail Length	3.7 mm[.146 in]	
Termination Method to Printed Circuit Board	Through Hole - Solder	
Mechanical Attachment		
Mating Alignment Type	Polarization	
Mating Retention	With	
Mating Retention Type	Latch	
Connector Mounting Type	Board Mount	
Mating Alignment	With	
PCB Mount Alignment	Without	
PCB Mount Retention	Without	
Housing Features		
Housing Material	PBT GF	
Centerline (Pitch)	3.96 mm[.156 in]	

PCB Mount Header, Vertical, Wire-to-Board, 7 Position, 3.96 mm [.156 in] Centerline, Partially Shrouded, Tin, Through Hole - Solder, Economy Power



Dimensions

	1.089 in	
Connector Height	10.7 mm[.421 in]	
Connector Width	8.5 mm[.33 in]	
PCB Thickness (Recommended)	1.6 mm[.063 in]	
Usage Conditions		
Operating Temperature Range	-25 – 105 °C[-13 – 221 °F]	
Operation/Application		
	Power	
Circuit Application	Power	
Circuit Application Industry Standards	Power	
	Power Standard Part - Not Glow Wire	
Industry Standards		
Industry Standards Glow Wire Rating	Standard Part - Not Glow Wire	
Industry Standards Glow Wire Rating UL Flammability Rating	Standard Part - Not Glow Wire	
Industry Standards Glow Wire Rating UL Flammability Rating Packaging Features	Standard Part - Not Glow Wire UL 94HB	

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Solder Process Capability	Wave solder capable to 265°C	
Product Compliance Disclaimer This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous		

PCB Mount Header, Vertical, Wire-to-Board, 7 Position, 3.96 mm [.156 in] Centerline, Partially Shrouded, Tin, Through Hole - Solder, Economy Power




materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



Also in the Series | Economy Power

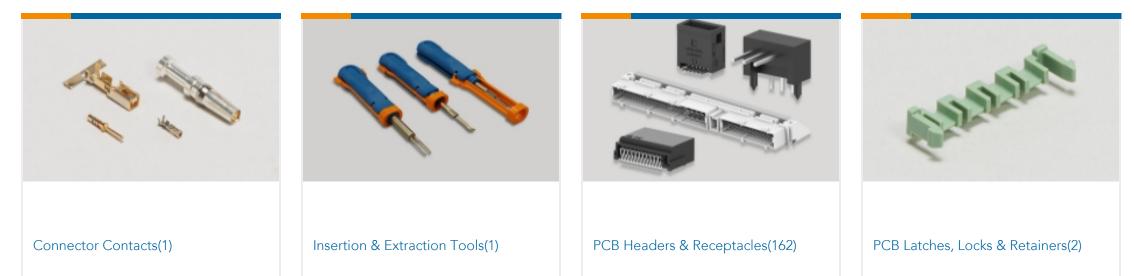


A A A			
Power Contacts(8)	Rectangular Connector Housings(1)	Rectangular Power Connectors(302)	Wire-to-Board Connector Assemblies & Housings(142)

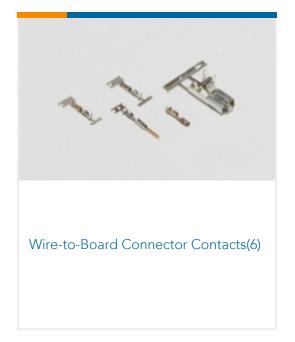


Customers Also Bought

PCB Mount Header, Vertical, Wire-to-Board, 7 Position, 3.96 mm [.156 in] Centerline, Partially Shrouded, Tin, Through Hole - Solder, Economy Power



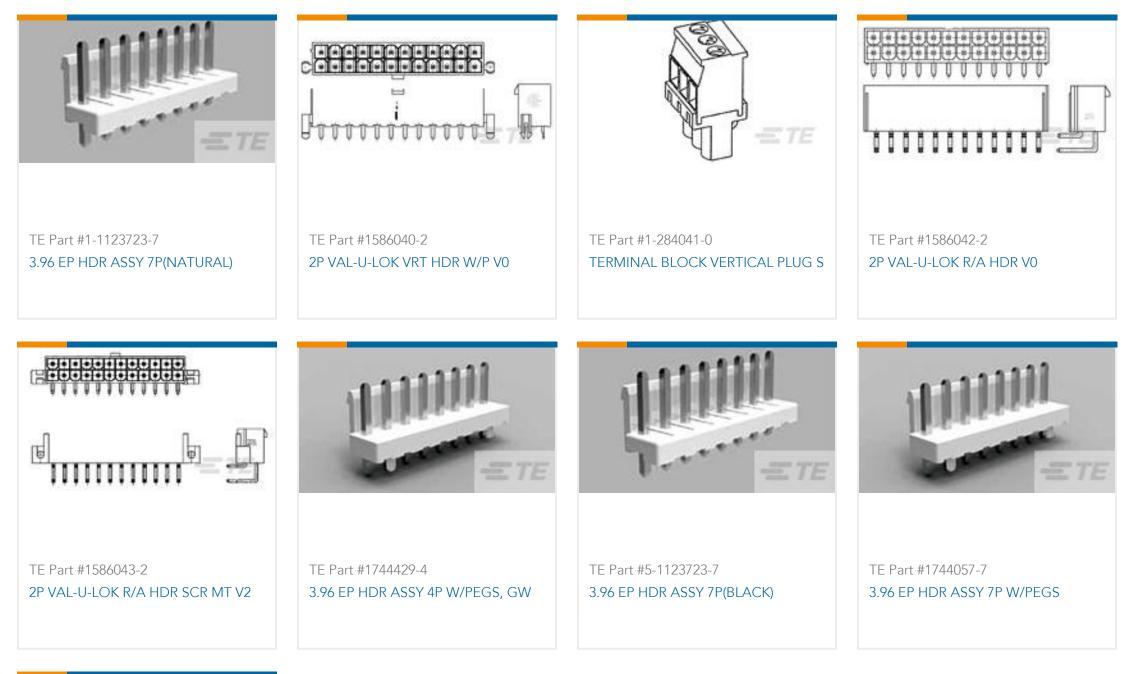

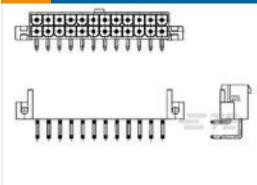

TE Part #1586044-2 2P VAL-U-LOK R/A HDR SCR MT V0

Documents

Product Drawings 3.96 EP HDR ASSY 7P(GREEN)

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_6-1123723-7_AD.2d_dxf.zip

English

Customer View Model ENG_CVM_CVM_6-1123723-7_AD.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_6-1123723-7_AD.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

C For support call+1 800 522 6752

PCB Mount Header, Vertical, Wire-to-Board, 7 Position, 3.96 mm [.156 in] Centerline, Partially Shrouded, Tin, Through Hole - Solder, Economy Power



Application Specification

English

Application Specification

Japanese

Application Specification

English

Instruction Sheets

Instruction Sheet (non U.S.)

Japanese

Economy Power (EP) Connector

Japanese