



Connectors > Automotive Connectors > Automotive Seals & Cavity Plugs



Connector Seal & Plug Type: **Gasket**

Primary Product Material: **Closed Cell Sponge**

Operating Temperature (Max): **107 °C [225 °F]**

Contains Lubricant: **No**

Primary Product Color: **Black**

Features

Product Type Features

Connector Seal & Plug Type	Gasket
----------------------------	--------

Configuration Features

Number of Positions	12
---------------------	----

Body Features

Primary Product Material	Closed Cell Sponge
Primary Product Color	Black

Usage Conditions

Operating Temperature (Max)	107 °C[225 °F]
Operating Temperature Range	-57 – 107 °C[-70 – 225 °F]

Industry Standards

UL Flammability Rating	UL 94HBF
------------------------	----------

Packaging Features

Packaging Method	Box
------------------	-----

Other

Contains Lubricant	No
--------------------	----

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



Also in the Series | **DEUTSCH DT**



Automotive Connector Caps & Covers (107)

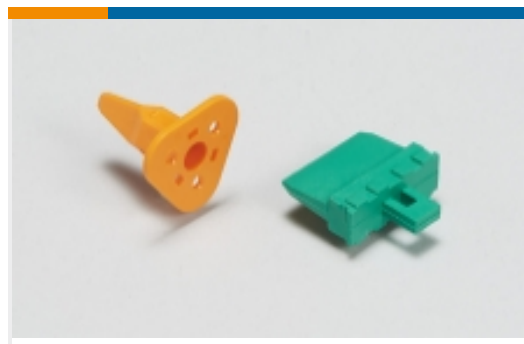

Automotive Connector Locks & Position Assurance(74)



Automotive Housings(619)




Automotive Seals & Cavity Plugs(6)



Insertion & Extraction Tools(3)



Other Automotive Connector Accessories(20)

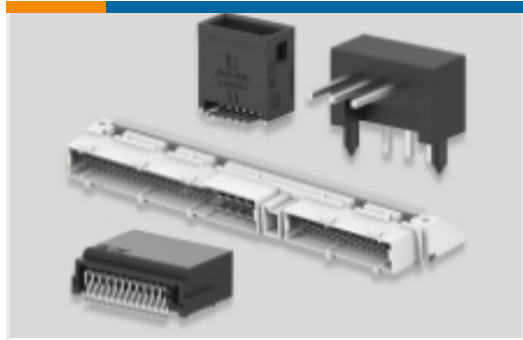

PCB Headers & Receptacles(103)

Customers Also Bought



TE Part #DT04-12PB-L012
 DEUTSCH DT Receptacle Connectors



TE Part #W12S
 Wedgelocks: DEUTSCH DT




TE Part #1-2328352-2
 25POS, MIXED,REC HSG,ASSY,
 SEALED, COD A



TE Part #DTP4P-L012-GKT
 GASKET, 4P, BLK, DTP



TE Part #DT4P-L012-GKT
 GASKET, 4P, BLK, DT/DTM

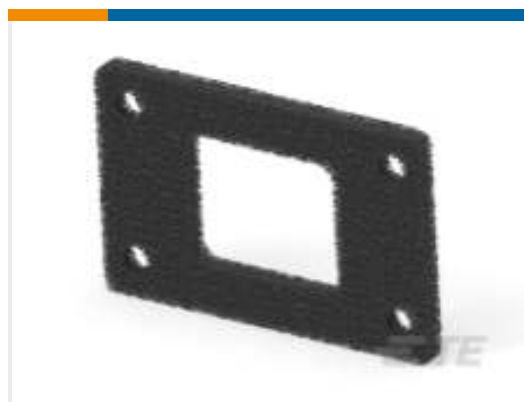

TE Part #DT8P-L012-GKT
 GASKET, 8P, BLK, DT/DTM



TE Part #CAR2SC68
 CAR RECPT DIN9680 2way, IP68



TE Part #K5000061
 Batt. Disconnecter 35-314-131-R-901

Documents

Product Drawings

[GASKET DT 12 WY FLD RC](#)

English

CAD Files

[Customer View Model](#)

[ENG_CVM_CVM_DT12-L012-GKT_B.3d_igs.zip](#)

English

[Customer View Model](#)



[ENG_CVM_CVM_DT12-L012-GKT_B.3d_stp.zip](#)

English

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_DT12-L012-GKT_B.2d_dxf.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[CONNECTOR SELECTOR](#)

English

Product Specifications

[Application Specification](#)

English