
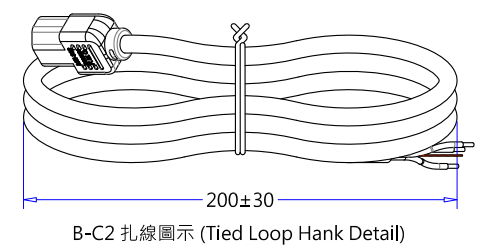
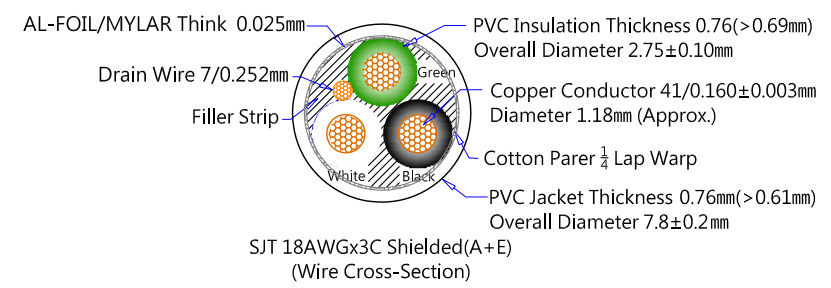
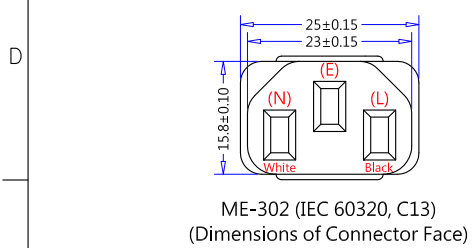


插頭部件 (Plug Component)			頭部剥皮尺寸 (Dimensions)			線材規格 (Wire Styles)		尾部剥皮尺寸 (Dimensions)			端子規格 (Terminal Style)	
顏色(Color)	零件描述(Component)	Qty.	內剥(Stripped)	外剥(ROJ)	顏色(Color)	SJT 18AWGx3C (Shielded, A+E) 105°C 黑色 (Black) Length : 2000±50 (78.7"±2")	外剥(ROJ)	內剥(Stripped)	顏色(Color)	規格描述(Instruction)	端子編號(Style No.)	
35P 黑色 (Black)	ME-302 (IEC 60320, C13)	1	6 ⁺¹ ₋₀	18 ± 2	黑/Black(L)		50.8±5	6.5±3	黑/Black(L)	絕緣依尺寸剝除,留膠於線上 (Strip and Retain Outside Insulated)		
銅本色 (Brass-Natural)	2.0*4.0 方管端子(GEM 98752A-0) (2.0*4.0 Receptacle Terminal)	3	6 ⁺¹ ₋₀	18 ± 2	白/White(N)		50.8±5	6.5±3	白/White(N)	絕緣依尺寸剝除,留膠於線上 (Strip and Retain Outside Insulated)		
米白色 (Off-White)	GA005-5 品字母插兩件式內模 (Computer 2x4 Serial Housing)	1	6 ⁺¹ ₋₀	18 ± 2	綠/Green(E)	50.8±5	6.5±3	綠/Green(E)	絕緣依尺寸剝除,留膠於線上 (Strip and Retain Outside Insulated)			

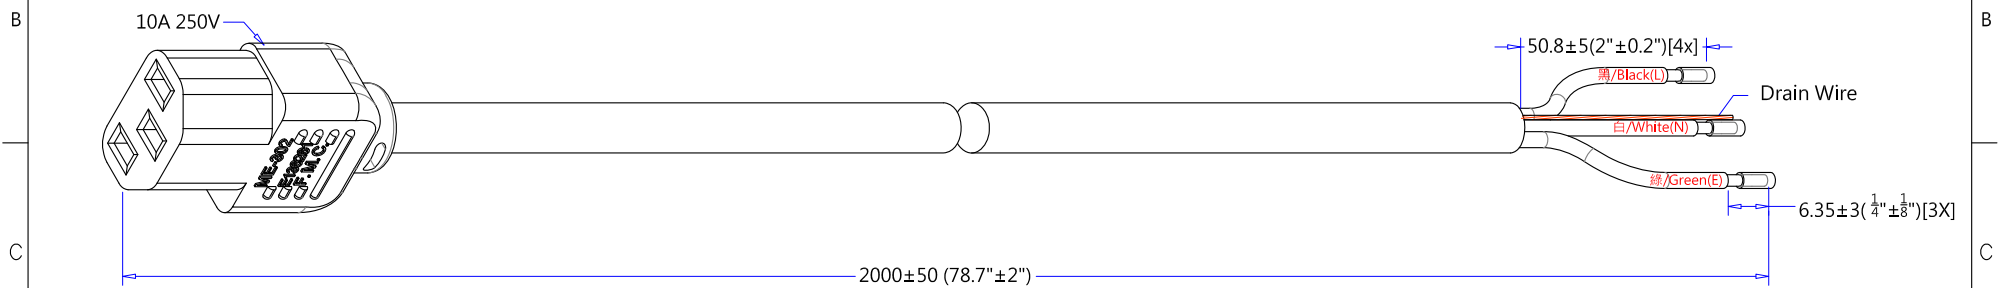

REV	DATE	REVISE CONTENT	NOTE:	線材印字 (Wire Printed)	充麻, 油墨印字 (Fillers, Printing Ink)	CnC Tech, LLC Industrial Cable and Connector Technology					
A	08/30-2012	The first edition is issued and drawing.	1. Hi-Pot Test : 1500V/1Sec ; <0.5mA. 2. Insulation Resistance Test : DC 500/min>100 meg-ohm. 3. Continuity & Polarization Test : No short circuit, break circuit, displacement. 4. Each end terminal shall be capable of withstanding a pull of 25lbs for 1 minutes without loosening. 5. Strain relief shall be capable of withstanding a pull of 35lbs for 1 minutes without loosening. 6. All material according to Non-toxic standard.(Material must be RoHS compliant.) 7. "FMC" logo maybe present on C13.	包裝方式 (Packing)		DRAWN <i>Chu8.</i>		CUSTOMER		CnC	
				Tied Hank	See Hank Detail	DATE		P/N No.		800-1809-2-SJT0-BL-00200	
				Carton Size	480 x 320 x 250	08/30-2012		MATERIAL		PVC UNIT mm	
				Pack Number	125pcs/ <small>UL Laster Labels</small>	TYPE		Customer Approval			
				Carton Print	See Purchase Order	IEC 60320, C13 to ROJ (S&R) Power Supply Cord		DRAWING NO.		098MM1002 REV A	

業務校閱 :
品質校閱 :