


Z-PACK | Z-PACK 2mm HM

TE Internal #: 5646442-1 Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb /s, 25 Column, 8 Row, Mezzanine, 176 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM

View on TE.com >

Connectors > PCB Connectors > Backplane Connectors > Hard Metric Backplane Connectors >

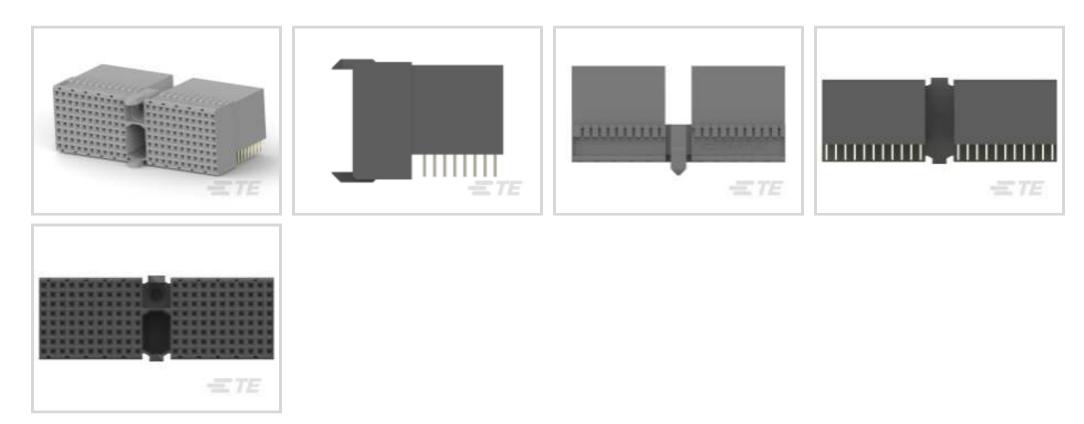

HM Receptacle Connector: Traditional Backplane, Coplanar, 2mm

PCB Connector Assembly Type: PCB Mount Receptacle

Data Rate: **≤1 Gb/s**

Number of Columns: 25

Number of Rows: 8

Backplane Architecture: Mezzanine

All HM Receptacle Connector: Traditional Backplane, Coplanar, 2mm (48)



Features

Product Type Features

Backplane Interface Type	2mm HM	
PCB Connector Assembly Type	PCB Mount Receptacle	
Connector System	Board-to-Board	
Sealable	No	
Connector & Contact Terminates To	Printed Circuit Board	
Configuration Features		
Rows Loaded	A, B, C, D, E, F, G, H	
Number of Signal Positions	176	
Number of Columns	25	
Number of Rows	8	
Backplane Architecture	Mezzanine	
Number of Positions	176	

Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb/s, 25 Column, 8 Row, Mezzanine, 176 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM



PCB Mount Orientation	Right Angle	
Signal Characteristics		
Crosstalk Version	Standard	
Data Rate	≤1 Gb/s	
Body Features		
Primary Product Color	Gray	
Contact Features		
Feedthrough Post Length	3.3 mm	
CompactPCI Designation	None	
Contact Type	Socket	
Contact Underplating Material	Nickel	
PCB Contact Termination Area Plating Material	Tin	
Contact Base Material	Phosphor Bronze	
Contact Mating Area Plating Material	Performance Based	
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]	
Contact Current Rating (Max)	1.5 A	

Termination Features

Termination Method to Printed Circuit Board	Through Hole - Press-Fit	
Mechanical Attachment		
Mating Alignment Type	Multi-Purpose Center	
Connector Mounting Type	Board Mount	
Housing Features		
Housing Material	Polyester - GF	
Centerline (Pitch)	2 mm[.078 in]	
Dimensions		
Backplane Module Length	48 mm	
Usage Conditions		
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]	
Operation/Application		
Shielded	No	
Circuit Application	Signal	

Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb/s, 25 Column, 8 Row, Mezzanine, 176 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM



Industry Standards

UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	10
Packaging Method	Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Solder Process Capability	Not applicable for solder process capability	


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb/s, 25 Column, 8 Row, Mezzanine, 176 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM



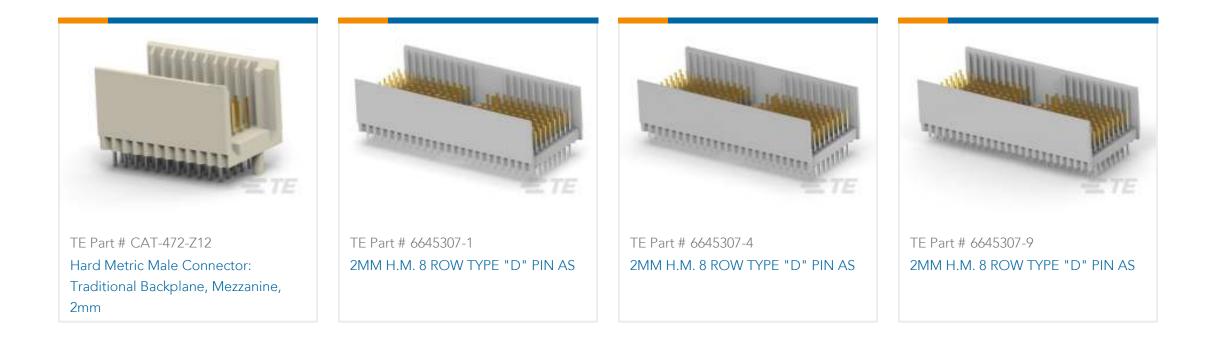

TE Part # 6645281-1 2MM H.M. TYPE "D" PIN ASSY.

Also in the Series Z-PACK 2mm HM

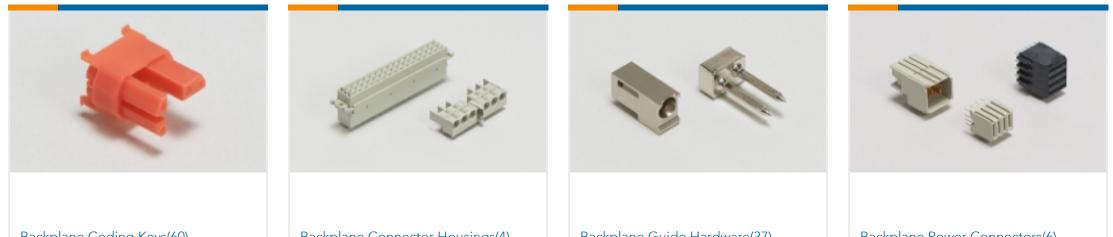

Backplane Coding Keys(60)	Backplane Connector Housings(4)	Backplane Guide Hardware(37)	Backplane Power Connectors(6)
A State of the sta			
Board-to-Board Connector Contacts(2)	Hard Metric Backplane Connectors (269)	High Speed Backplane Connectors(1)	Insertion & Extraction Tools(2)
PCB Connector Covers(4)	PCB Connector Shrouds(39)	PCB Ferrules & Shields(19)	Rectangular Power Connectors(87)

Customers Also Bought

C For support call+1 800 522 6752

Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb/s, 25 Column, 8 Row, Mezzanine, 176 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM





Documents

Product Drawings 2MM HM, ASY, T-D, REC, TWIST TULIP

English

CAD Files **Customer View Model** ENG_CVM_CVM_5646442-1_O.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5646442-1_O.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5646442-1_O.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Product Specifications Application Specification

English

Product Environmental Compliance TE Material Declaration

English