


COIL: @ +25° C
 RESISTANCE 160 OHMS ± 10%
 NOMINAL VOLTAGE 12.0 VDC
 MUST OPERATE 6.4 VDC
 MUST RELEASE 0.7 VDC

CUSTOMER DATA SHEET

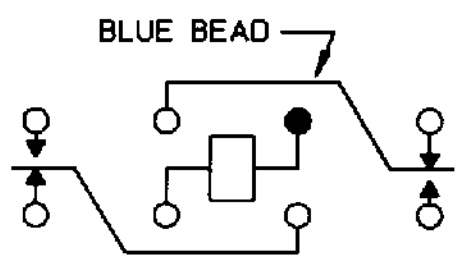

ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 6 ± 1 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

NOTES: _____

DR. R.B. 3/19/92 CK. 3-19-92 JMB



CUST. C. I. I. STD.
 CUST. NO. _____

TYPE "HFW" RELAY

HFW1131G00