
CUSTOMER DRAWING

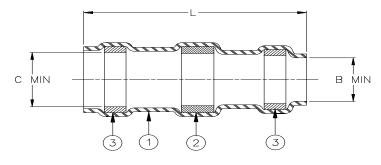

| Product | | P | Product Dimensi | Cable Dimensions | | |
|----------|---------|----------|-----------------|------------------|---------|---------|
| Name | NAS | L±1.52 | В | С | D | E |
| | Equiv. | (L±0.06) | min | min | max | min |
| D-142-50 | 1745-14 | 15.75 | 2.80 | 3.175 | 3.175 | 1.40 |
| | | (0.620) | (0.110) | (0.125) | (0.125) | (0.055) |
| D-142-51 | 1745-15 | 15.75 | 4.45 | 5.08 | 5.08 | 2.54 |
| | | (0.620) | (0.175) | (0.200) | (0.200) | (0.100) |
| D-142-52 | 1745-16 | 19.05 | 7.11 | 7.62 | 7.62 | 4.06 |
| | | (0.750) | (0.280) | (0.300) | (0.300) | (0.160) |

MATERIALS

- 1. INSULATION SLEEVE: Heat shrinkable, radiation cross-linked polyvinylidene fluoride. Color: natural.
- 2. SOLDER PREFORM WITH FLUX:

SOLDER: TYPE Cd18 per ANSI J-STD-006.

FLUX: TYPE ROL0 per ANSI J-STD-004.


3. MELTABLE RINGS: Thermally stabilized thermoplastic, one grey, and one blue.

APPLICATION

- 1. These parts are designed for shield terminations on cables having tin or silver plated shields and insulations rated for at least 105°C and falling within size range listed.
- 2. These parts are designed to meet the requirements of Raychem Specification RT-1404. They also comply with National Aerospace Standard Part Drawing NAS-1745.

See table above for equivalent size.

- 3. For installation techniques, see Raychem Assembly Procedure RCPS 100-70.
- 4. For other sizes available in this configuration, see Raychem Devices Specification Control Drawings D-142-56, -65 & -66.



TE Connectivity, TE connectivity (logo), Raychem, and SolderSleeve are trademarks

| | | | | ychem evices | TITLE: (105°C) SOLDERSLEEVE LOW TEMPERATURE | | | | |
|---|---------------------------------|--|--------------------|--------------------------------|---|---------------|------------------|---------------------------|--|
| UNLESS OTHERV INCHES DIMENS | | | | DOCUMENT NO.: D-142-50/-51/-52 | | | | | |
| TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A | ANGLES: N ROUGHNES MICRON | this drawing at any time. Users should eva | | | | Revisio B2 | | Issue Date: March 2020 | |
| DRAWN BY: Drawn Date: M. FORONDA 17-Jul-2000 | | | ECO: ECO-20-003573 | | SCALE: None | SIZE: A | SHEET: 1 of 1 | | |

If this document is printed it becomes uncontrolled. Check for the latest revision.