

REV. Status  
 REVISION -  
 10/25/01 RJ  
 REVISION A  
 REVISED PLUG  
 LOCATION. ADDED  
 RoHS  
 05/22/06 MP

A. Electrical specifications

1. Input voltage: AC 120V ±10% 60Hz ±0.5Hz
2. Output voltage and current: DC 24V at 150mA

$V_{in}$	100% Load	No Load
108	20.0VDC MIN	-
120	23.5-24.5VDC	34.0VDC MAX
132	-	37.0VDC MAX




NOTE: Specification applies after 10 minutes warm-up with full load and at any operating temperature.

3. Operating temperature: -10 °C to +40 °C
4. Storage temperature: -20 °C to +85 °C
5. Operating and Storage Humidity: 0 to 95% without condensation
6. Withstand voltage: 1000Vrms 1 minute @ input to output


B. Typical performance data test Condition:  
 Ta= +25°C measured after 10 minute warm-up with input at 120V 60Hz

C. Safety agencies  
 UL and cUL File No. E218172

D. Nameplate: Information is as follows:  
 Metallic letters on a black background




TYPICAL PERFORMANCE CHART

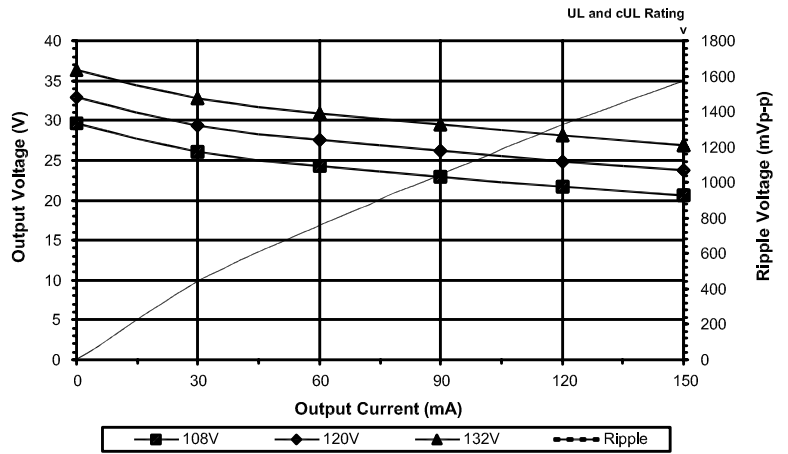

E. Mechanical Specifications

All dimensions shown are nominal unless otherwise specified

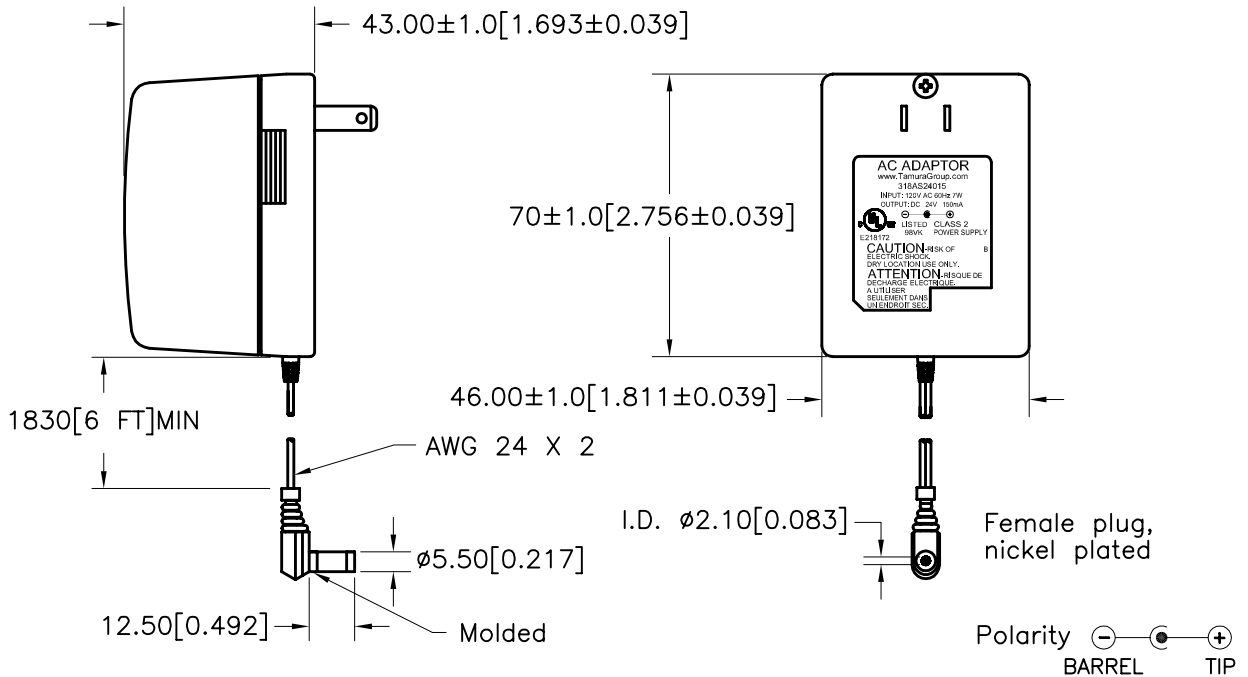

PREPARED BY:  
 K. BRENNAN

ENGINEER: M. PITCHAI  
 DWG CONTROL NO. P-A7-12936  
 REV A  
 ACAD\PS\A7129361.DWG

UL/cUL DC 24V 150mA  
 POWER SUPPLY

318AS24015

QUALITY CONTROL: T. CLEM  
 CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

TAMURA CORPORATION OF AMERICA  
 43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624  
 (951) 699-1270 FAX 9516769482

MODEL SPECIFICATION  
 DIM: mm(In) SCL: NONE SH: 1 OF 1

APPROVED: Y. SEKIGUCHI  
 PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.