


Solder bucket for AWG 20


SPECIFICATION

Performance level	PL2
Filter Type	C
Capacitance:	47pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	-
10	-
50	-
100	-
500	30dB
1000	35dB

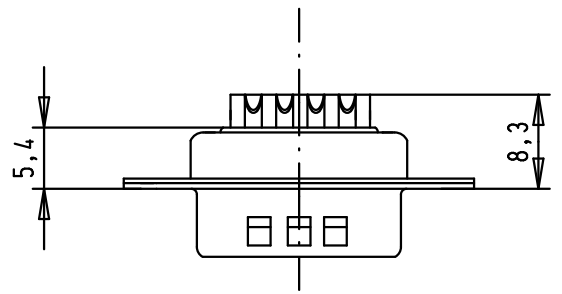

Mod.	Dat.	Name	Detail.	Dat.	Name
			Insp.	8-JUL-02	CV
			Stand.	12/01/12	JB
36283	12/01/12	SD			
31897	17/05/04	AF			
31058	8-JUL-02	CV			
			HARTING EURL F-95972 Paris		



All Dim. in mm
Orig. Size DIN A 4



D-Sub, male, straight,
9 Poles, with turned
solder bucket and hole

TB 09641217210

Mo?Mstab/
Scale
1.5:1

Blatt/ Page
1 / 1

D
C
B
A