

High Frequency Ceramic Solutions

863-928MHz ISM Balun-Filter Integrated passive

P/N 0896FB15A0100

Detail Specification: 11/10/2010

Page 1 of 2


General Specifications

Part Number	0896FB15A0100	Attenuation (dB)	30 min. @1726~1856MHz
Frequency (MHz)	863 - 928		30 min. @2589~2784MHz
Unbalanced Impedance	50 Ω		30 min. @3452~3712MHz
Balanced Impedance	100 Ω	Power Rating	1W max.
Insertion Loss	1.5 dB max.	Reel Quantity	4000
Return Loss	11.7 dB min.	Operating Temp.	-40 to +85 °C
VSWR @ BW	1.7 max.	Storage Conditions	+5 to +35°C, RH 45 to 75%
Phase Difference	180° ± 15	Storage Period	12 mos. max.*
Amplitude Difference	2.0 dB max.		

* - 1 yr shelf life in bag; 1 week shelf life out of bag; Vacuum reseal unused reel. More info: www.johansontechnology.com/silverleads


Mechanical Dimensions

	In	mm
L	0.079 ± 0.008	2.00 ± 0.20
W	0.049 ± 0.008	1.25 ± 0.20
T	0.028 ± 0.004	0.70 ± 0.10
a	0.012 ± 0.004	0.30 ± 0.10
b	0.008 ± 0.004	0.20 ± 0.10
c	0.012 +.004/-0.008	0.30 +0.1/-0.2
g	0.014 ± 0.004	0.35 ± 0.10
p	0.026 ± 0.002	0.65 ± 0.05

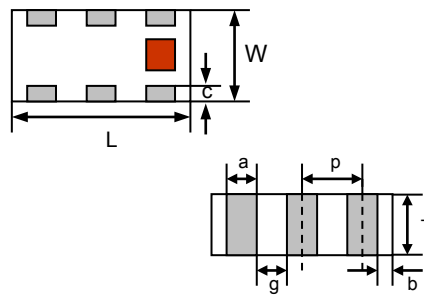


Terminal Configuration

No.	Function
1	Unbalanced Port
2	GND
3	Balanced Port
4	Balanced Port
5	GND
6	GND



Mounting Considerations

* Line width should be designed to match 50 Ω characteristic impedance, depending on PCB material and thickness.

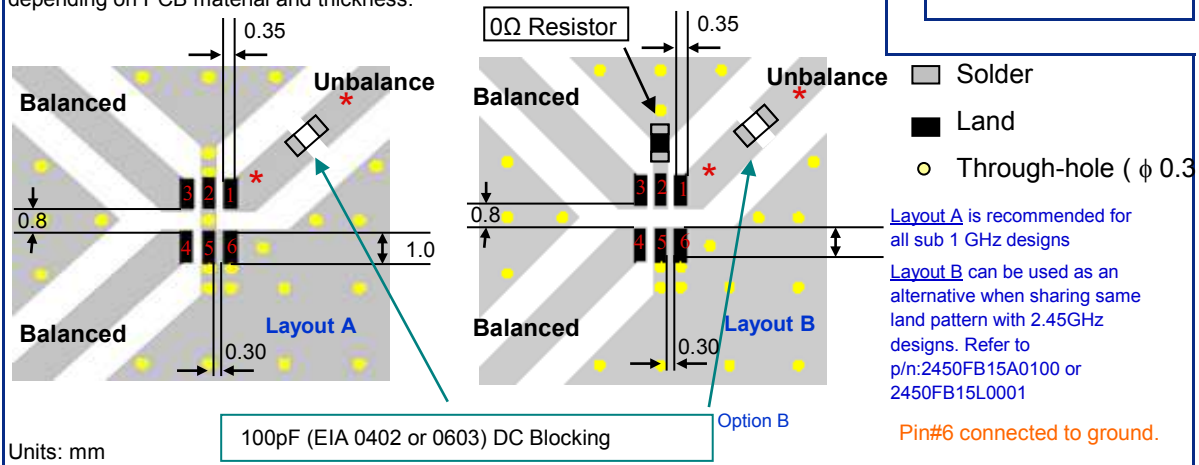

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.




www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 3.0

2009 Johanson Technology, Inc. All Rights Reserved

Typical Electrical Performance (T=25°C)

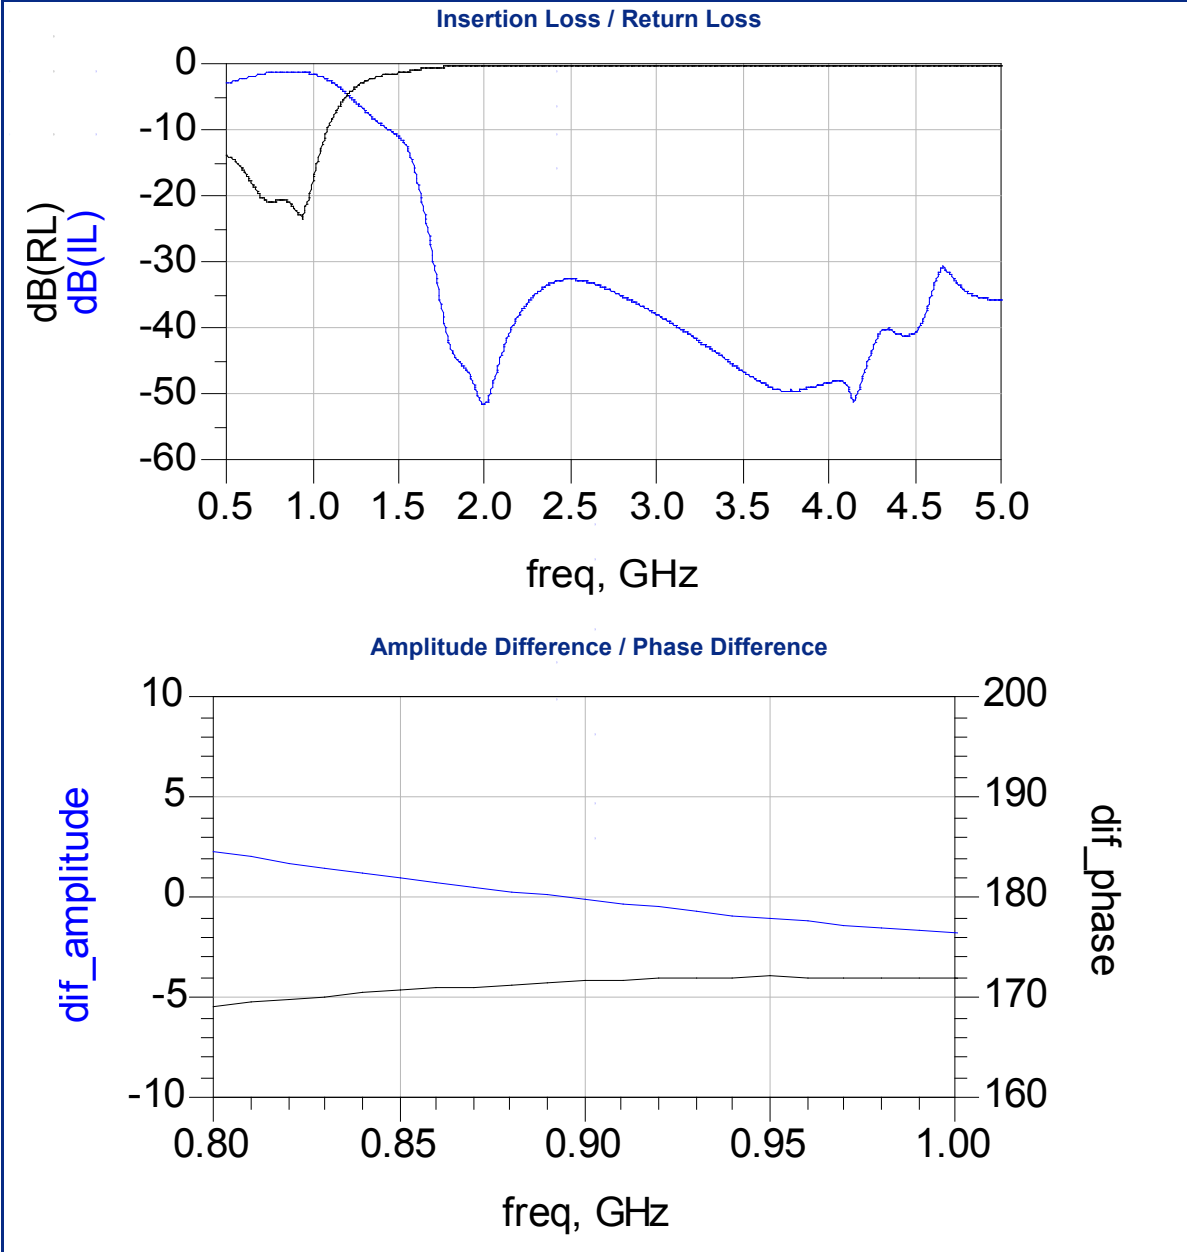

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.