


CONNECTOR P/N	TYPE OF FIT	K (KEY), in/mm	ØD (µm)	Ød (µm)	CABLE DIAMETER (mm)
106055-2400	TIGHT	.0785/1.99	125.5	1.0	3
106056-2400	STANDARD	.083/2.11	125		
106055-4400	TIGHT	.0785/1.99	125		
106056-4400	STANDARD	.083/2.11	125		
106055-5400	TIGHT	.0785/1.99	126		
106056-5400	STANDARD	.083/2.11	126		
106055-5600	TIGHT	.0785/1.99			2.4

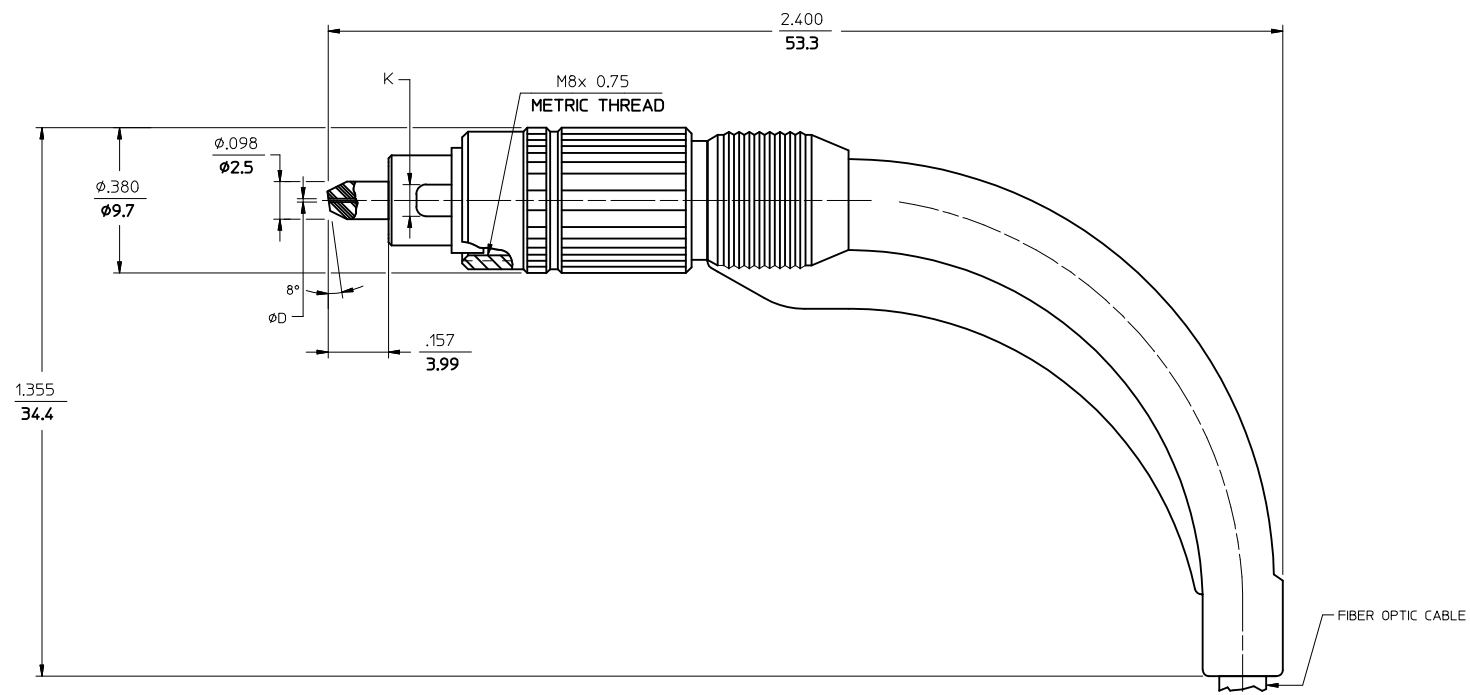

NOTE:  
1. DUST CAP INCLUDED, BUT NOT SHOWN.

ENTER DESCRIPTION EC NO: MF2012-0610 DRWN: MGHAYERE 2012/06/06 CHKD: LGJMIN APPR: LGJMIN 2012/06/08	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION																	
	▼=0 ▽=0	<table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>± .005</td> <td>± .0004</td> </tr> <tr> <td>3 PLACES</td> <td>± .005</td> <td>± .0004</td> </tr> <tr> <td>2 PLACES</td> <td>± .005</td> <td>± .0004</td> </tr> <tr> <td>1 PLACE</td> <td>± .005</td> <td>± .0004</td> </tr> <tr> <td>0 PLACE</td> <td>± .005</td> <td>± .0004</td> </tr> </tbody> </table>		mm	INCH		4 PLACES	± .005	± .0004	3 PLACES	± .005	± .0004	2 PLACES	± .005	± .0004	1 PLACE	± .005	± .0004	0 PLACE	± .005	± .0004	IN/MM	4:1
		mm	INCH																				
	4 PLACES	± .005	± .0004																				
3 PLACES	± .005	± .0004																					
2 PLACES	± .005	± .0004																					
1 PLACE	± .005	± .0004																					
0 PLACE	± .005	± .0004																					
REV: B3	DESCRIPTION	ANGULAR ±1/2°	DRAWN BY	DATE	TITLE																		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	KP	2006/05/24	FCII APC CONNECTOR WITH 90D BOOT																		
			CHECKED BY	DATE																			
			APPROVED BY	DATE																			
			ILG	2006/05/24																			
			MATERIAL NO.	DOCUMENT NO.																			
			SEE TABLE	SD-10605Y-YY00																			
			SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																			