

## Formable microwave cable


SR\_141\_CT Item: 85093931

### Description

Semi-rigid: Semi-rigid, formable microwave cables

RG402 dimension, phase stable over temperature, 50 Ohm, 33

GHz, 200°C, ø3.58 mm, no jacket

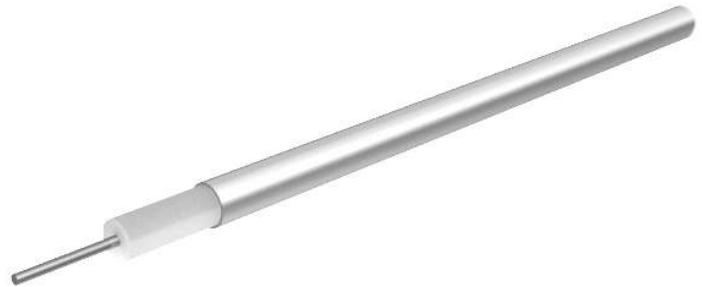

### Technical Data

#### Construction

	Material	Detail	Diameter
Centre conductor	Aluminium, Copper clad, Silver plated	Wire	1.08 mm
Dielectric	Low density fluorine polymer		2.95 mm
Outer conductor	Aluminum / TP	Tube, 100%	3.58 mm

#### Electrical Data

Impedance		50 Ω +/- 2
Operating Frequency		33 GHz
Capacitance		80.2 pF/m
Velocity of signal propagation		83 %
Signal delay		4 ns/m
Screening effectiveness		≥ 120 dB (up to 18 GHz)
Operating voltage		≤ 1.9 kV <sub>rms</sub> (at sea level)
Phase vs Temperature	-55°C... + 85°C	400 ppm

#### Mechanical Data

Weight		1.8 kg/100 m
Min. bending radius	static	10 mm

#### Environmental Data

Temperature range	-55 °C ... +200 °C
Installation temperature	-20 °C... +60 °C
Halogen free	No
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant
1907/2006/EC (REACH)	compliant
2000/53/EC (ELV)	compliant
2012/19/EU (WEEE)	no special marking needed

### Additional Information

#### Remarks

(For details refer to the HUBER+SUHNER RF CABLES GENERAL CATALOGUE or contact your nearest HUBER+SUHNER partner)

#### Suitable Connectors

Cable group	Y26 3mm / 50 Ohm
-------------	------------------

## Formable microwave cable

SR\_141\_CT Item: 85093931

**Matrix** typical Attenuation [ formula:  $(a \cdot f^{0.5} + b \cdot f)$  ] and maximum Power CW [ formula:  $(p/f^{0.5})$  ]

Coefficients:

a = 0.34

b = 0.02

$f_{\max} = 33$

P at 1GHz = 364

Frequency (GHz)	Nom. attenuation (dB / m) sea level 25° C ambient temperature	Nom. attenuation (dB / ft) sea level 25° C ambient temperature	Max. CW power (W) sea level 40° C ambient temperature
1.65	0.47	0.143	283
3.3	0.68	0.208	200
4.95	0.86	0.261	164
6.6	1.01	0.306	142
8.25	1.14	0.348	127
9.9	1.27	0.386	116
11.55	1.39	0.423	107
13.2	1.5	0.457	100
14.85	1.61	0.490	94
16.5	1.71	0.522	90
18.15	1.81	0.552	85
19.8	1.91	0.582	82
21.45	2.0	0.611	79
23.1	2.1	0.639	76
24.75	2.19	0.666	73
26.4	2.27	0.693	71
28.05	2.36	0.720	69
29.7	2.45	0.746	67
31.35	2.53	0.771	65
33.0	2.61	0.796	63