
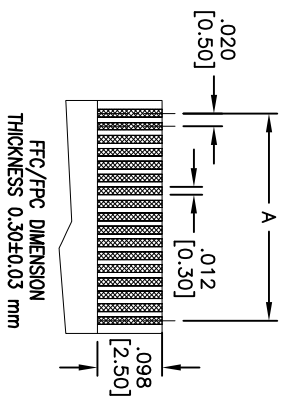

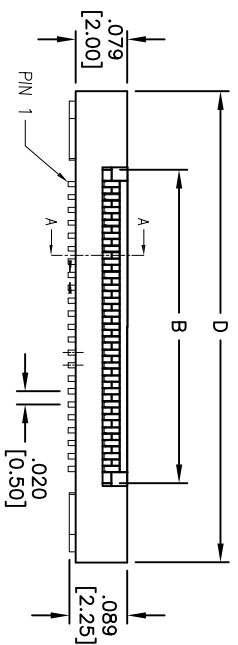
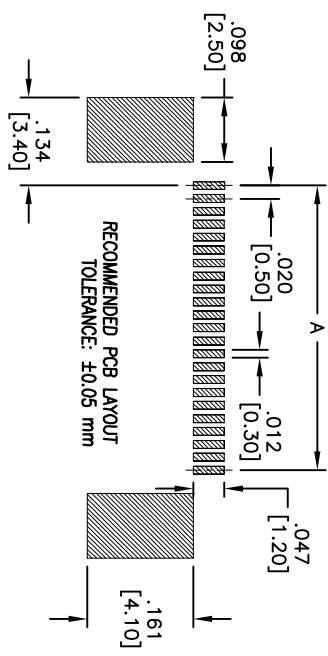



Rev	AWO #	Description	Date	Appr
-		RELEASED	11/20/12	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

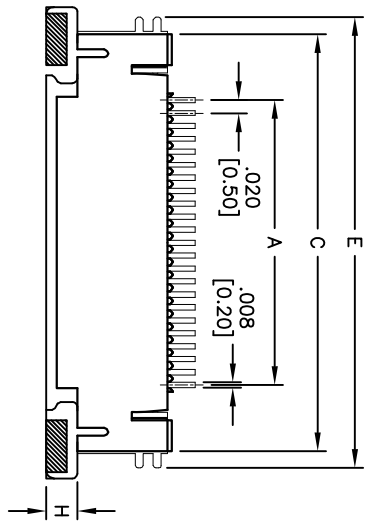

**SPECIFICATIONS:**  
 Material: Hi-temperthermoplastic, rated UL 94V-0, Color: Natural  
 Housing: Hi-temperthermoplastic, rated UL 94V-0, Color: Black  
 ACTUATOR: Hi-temperthermoplastic, rated UL 94V-0, Color: Black  
 Contacts: Copper Alloy  
 Holddown: Copper Alloy  
 Plating:  
 Tin over Copper underplate overall  
 Electrical:  
 Operating voltage: 50 VAC max  
 Current rating: 0.5 Amps max  
 Contact resistance: 20 mohms max initial  
 Insulation resistance: 50 Mohms max  
 Dielectric withstanding voltage: 250 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -20°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant.

**Positions: 3 thru 61**  
 A = .020 [0.50] x No. of Spaces  
 B = .020 [0.50] x No. of Spaces +.043 [1.10]  
 C = .020 [0.50] x No. of Spaces +.201 [5.10]  
 D = .020 [0.50] x No. of Spaces +.280 [7.10]  
 E = .020 [0.50] x No. of Spaces +.252 [6.40]  
 F = 3~30: .169 [4.30] 31~61: .185 [4.70]  
 H = 3~30: .031 [0.80] 31~61: .047 [1.20]

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES: .10 ±.10 ØXX ±.015  
 .XX ±.020 ØXXX ±.015  
 .XXX ±.015 ØXXXX ±.010  
 APPROVALS

DRAWN	AY	11/20/12
CHECKED	YC	11/20/12
APPROVED		

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE	ZIF FLEX CIRCUIT CONNECTOR
SIZE	PCA-6L-XX-HU-3
PART NO.	
SCALE	NIS
SHEET	1 OF 1

