

NOTES:

1. MATERIALS AND FINISHES:

SMPM RA PLUG  
 CAP - BRASS, NICKEL PLATING  
 BODY - BRASS, GOLD PLATING  
 CONTACT AND OUTER CONTACT - BeCu, GOLD PLATING  
 INSULATOR - PTFE, NATURAL  
 INSULATOR DISC - ULTEM 100, NATURAL

SMPM STR PLUG  
 BODY AND CONTACT- BeCu, GOLD PLATING  
 INSULATOR - PTFE, NATURAL

CABLE - TFLX 405


2. ELECTRICAL:

A. IMPEDANCE: 50 OHM


3. PACKAGING:

A. QUANTITY: SINGLE PACK  
 B. MARKING: BAG TO BE MARKED  
 "AMPHENOL RF, 95-725-128-XXX AND DATE CODE"

REVISIONS				
REV	DESCRIPTION	DATE	ECN	BY
A	RELEASE TO MFG.	02-NOV-22	16453	SH



SCALE 1.000

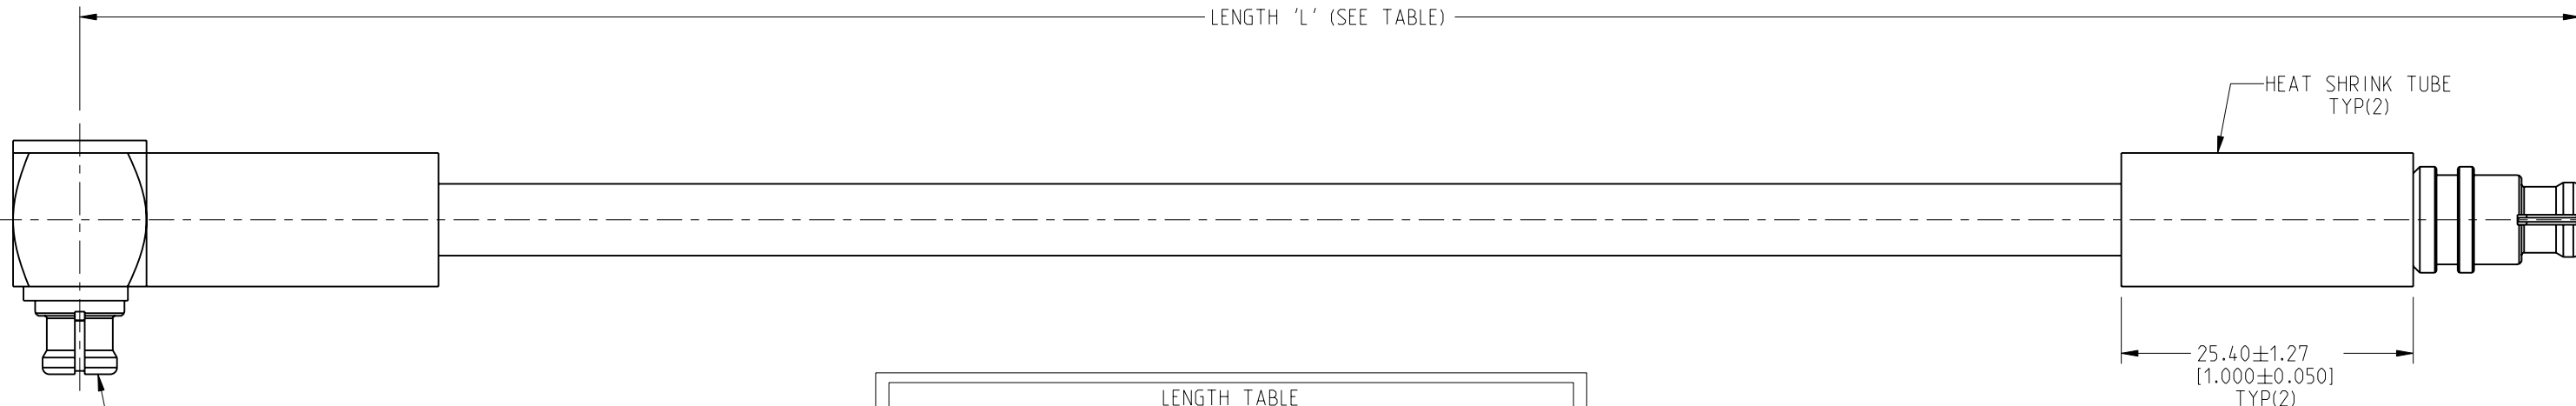

INTERFACE PER  
 MIL-STD-348  
 SERIES: SMPM PLUG  
 TYP(2)

LENGTH TABLE		
PART NUMBER (IMPERIAL)	PART NUMBER (METRIC)	LENGTH 'L' IN INCHES [MM]
95-725-128-003	-	3.00 [76.00]
-	95-725-128M010	3.94 [100.00]
95-725-128-004	-	4.00 [102.00]
95-725-128-005	-	5.00 [127.00]
95-725-128-006	-	6.00 [152.00]
95-725-128-007	-	7.00 [178.00]
95-725-128-008	-	8.00 [203.00]
95-725-128-009	-	9.00 [229.00]
-	95-725-128M025	9.84 [250.00]
95-725-128-010	-	10.00 [254.00]
95-725-128-011	-	11.00 [279.00]
95-725-128-012	-	12.00 [305.00]
95-725-128-018	-	18.00 [457.00]
-	95-725-128M050	19.69 [500.00]
95-725-128-024	-	24.00 [610.00]
-	95-725-128M075	29.53 [750.00]
95-725-128-036	-	36.00 [914.00]
-	95-725-128M100	39.37 [1000.00]
95-725-128-048	-	48.00 [1219.00]
-	95-725-128M200	78.74 [2000.00]

TOLERANCE TABLE	
LENGTH IN INCHES/FT [METERS]	TOLERANCE
0" - 23.99" [0 - 0.609]	±0.25" [0.006]
24.00" - 59.99" [0.610 - 1.523]	±0.50" [0.013]
5.0' - 24.99' [1.524 - 7.617]	±2.5%
25.0' & UP [7.620 & UP]	±5.0%

DESIGN REQUIREMENTS:

- |  |  |
|--|--|
| <input checked="" type="checkbox"/> FREQUENCY: DC - 18 GHz                                   | <input checked="" type="checkbox"/> CONTINUITY       |
| <input checked="" type="checkbox"/> VSWR: 1.30 MAX. @ DC - 10 GHz<br>1.50 MAX. @ 10 - 18 GHz | <input checked="" type="checkbox"/> HI-POT: 250 VRMS |
| <input type="checkbox"/> INS. LOSS: _____ dB MAX.  | <input type="checkbox"/> OTHER                       |

**CUSTOMER OUTLINE DRAWING**  
 ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

NOTICE: These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

UNLESS OTHERWISE SPECIFIED  
 DIMENSIONS ARE METRIC (INCHES) AND TOLERANCES ARE:  
 <0.5mm = ±0.05mm [-0.020 = ±0.002]  
 >0.5 - 6mm = ±0.1mm [-0.020 - 0.236 = ±0.004]  
 >6.00 - 30mm = ±0.2mm [-0.236 - 1.181 = ±0.008]  
 >30.00 - 120mm = ±0.3mm [-1.181 - 4.725 = ±0.012]

MATERIAL  
 SEE NOTES

TITLE  
 SMPM RA PLUG TO  
 SMPM STR PLUG USING  
 TFLX 405 CABLE  
 VARIOUS LENGTH

Amphenol RF

SIZE	DRAWING NO. 95-725-128-XXX	REV
	ITEM NO. 95-725-128-XXX	A
	PART NO. 95-725-128-XXX	

THIRD ANGLE PROJ. REFERENCE EAR# 10814

ANGLES = ±1°

ENGR.1 VIJAY N M ENGR.2 M.ZHANG DATE 08-Oct-22

SHEET NO. 2 OF 2 SCALE: 5.0:1.0