



Recommended P.C. Board Layout
SCALE 8:1

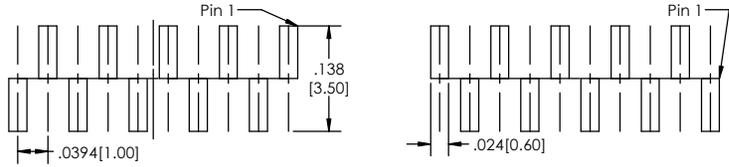


Single (M)


Single (S)

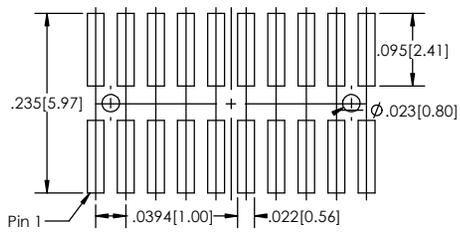



Double



(S) Option



(M) Option



BSTCM-7 **XX** - **X** - **XXX** - **XX** - **XX** - **XXX** - **XXX** - **X** - **XX** - **X** - **XX** - **LF**
(A) (B) (C) (D) (E) (F) (G) (H) (I) (J) (K) (L)

- A. Pins Per Row
- 1 through 40
- B. Row Specification
- S= Single Row
- D= Double Row
- C. Desired Post Height
- Please Specify
- e.g. .100[2.54] =100
- If post is not specified: Overall Length(L) - Board Space(B) = Post(P)
- D. Pin Options
- See Pin Options below
- E. Plating Options
- See Plating Options below
- F. Desired Board Space
- Please Specify required space
- E.g. .100(2.54)=100
- .200(5.08) min.
- G. Polarized Position
- Leave blank if not needed
- If required, specify empty pin position
- e.g. 012 for Pin 12
- H. Footprint (Only for the Single Row)
- S= Pin 1 Left
- M= Pin 1 Right
- I. Packing Information
- TR= Tape and Reel
- TB= Tube
- J. Pad
- P= Plastic
- O= No Pad
- K. Alignment Pin
- Leave blank if not needed
- AP= With
- L. Lead Free

Plating Options	
F	Gold Flash Over Entire Pin
T	200u Matte Tin All Over



Specifications:
Current Rating: 1.0 Ampere
Insulation Resistance: 500M Ohms Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20M Ohms Max.
Operation Temperature: -40°C to +105°C
Max. Process Temperature
Peak: 260°C up to 10 secs.
Process: 230°C up to 60 secs.
Wave: 260°C up to 6 secs.
Reflow: 260°C up to 10 secs.
Manual Solder: 350°C up to 5 secs.

Materials:
Contact Material: Phosphor Bronze
Insulator Material: Nylon 6T


Pin Options		
Length		
.136	3.45mm	04
.186	4.72mm	06
.236	5.99mm	08
.286	7.26mm	10
.310	7.87mm	11
.336	8.53mm	12
.386	9.80mm	14

Post + Board Space
must not exceed
Overall Length


Tails may be clipped to achieve specific dimensions.
Products cut to specific sizes are uncancelable/ nonreturnable.
Parts are subject to change without notice.

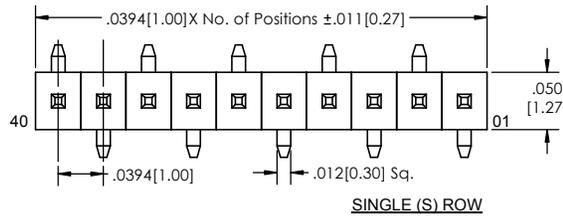


SINGLE (S) ROW

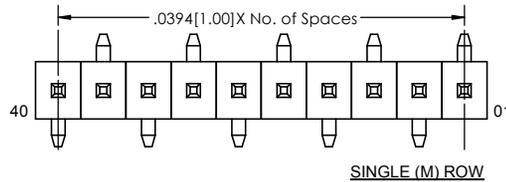

SINGLE (M) ROW

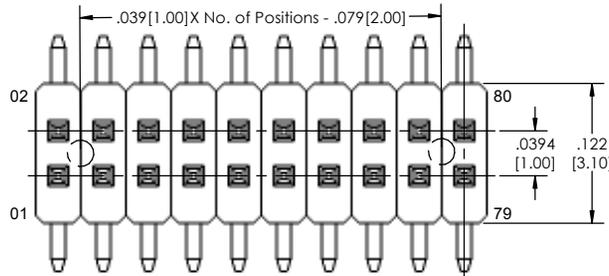

DOUBLE ROW



PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Major League Electronics. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Major League Electronics IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME		DATE	
DIMENSIONS ARE IN INCHES		DRAWN	EOW	02/26/14	
TOLERANCES:		CHECKED	GWE	02/26/14	
ONE DECIMALS ±.100		ENG APPR.			
TWO DECIMALS ±.010		MFG APPR.			
THREE DECIMAL ±.005		ADDRESS:			
FOUR DECIMAL ±.002		2533 Centennial Blvd. Jeffersonville, IN 47130 Phone: 812-670-4174 Fax: 812-670-4175 E-Mail: mle@mlelectronics.com			
NEXT ASSY	USED ON	MATERIAL		TITLE: BSTCM-7 SERIES	
		FINISH		SIZE DWG. NO.	REV B
APPLICATION	DO NOT SCALE DRAWING			SCALE 12:1	SHEET 1 OF 1

