
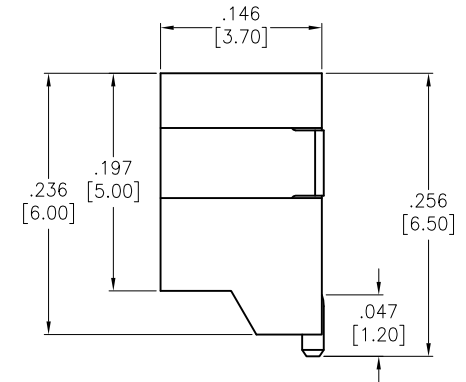
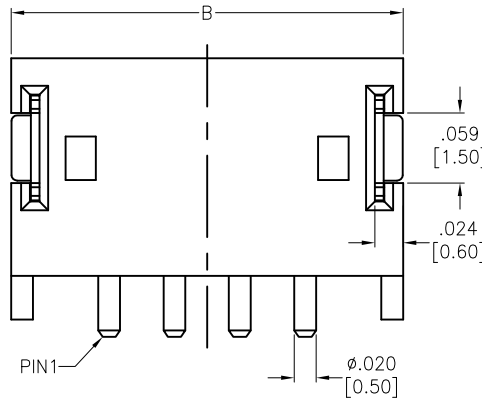
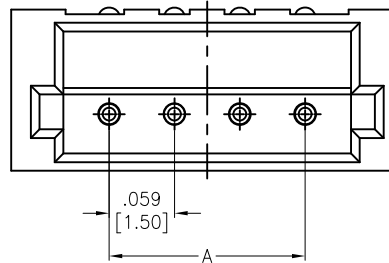


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/31/08	
A		REVISED SHAPE	11/04/09	
B		REVISED DIM.	3/6/13	
C		UPDATE DRAWING	10/31/19	LH/KL

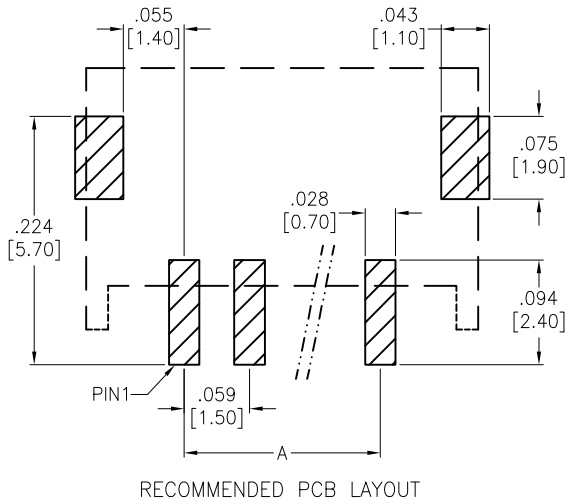

**SPECIFICATIONS:**

Material:  
 Insulator: Hi-Temp Thermoplastic, rated UL 94V-0  
 Insulator color: Ivory  
 Contacts: Brass  
 Solder Tab: Phosphor Bronze  
 Plating:  
 Tin over Nickel underplate overall  
 Electrical:  
 Voltage rating: 50 VAC/DC  
 Current rating: 1 Amp (26AWG)  
 Contact resistance: 20 mohms max  
 Insulation resistance: 500 Mohms min  
 Dielectric withstanding voltage: 500 VAC for 1 minute  
 Mechanical:  
 Applicable Wire: #32~#26AWG  
 Temperature Rating:  
 Operating temperature: -25°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant.



Positions: 02 thru 16

A = .059 [1.50] x No. of Spaces

B = .059 [1.50] x No. of Positions + .118 [3.00]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010		<b>ADAM TECH</b> INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS		DATE		TITLE	
DRAWN	SS	1/31/08		MX1.5mm WAFER 90°, SMT	
CHECKED		SIZE	PART NO.	REV.	
APPROVED		X	15SH-A-XX-TR-SMT	C	
REF: S00123T		SCALE: NTS	SHEET 1 OF 1		