

| т | ۵ | н п | <br>D | 0 |
|---|---|-----|-------|---|
|   |   |     |       |   |



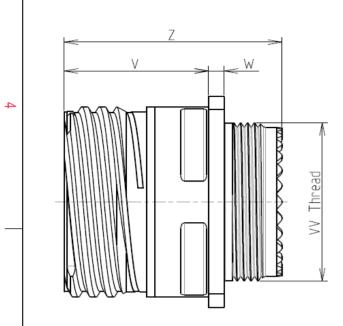



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 09

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

| -Shell Material |  | : Aluminium                                  |  |  |
|-----------------|--|--|--|--|
|                 | -Shell Plating                                   | : Olive drab Cadmium                         |  |  |
|                 | -Insulator                                       | : Thermoplastic                              |  |  |
|                 | -Contacts  | : Copper Alloy                               |  |  |
|                 | -Seals & Grommet                                 | : Silicon Elastomer                          |  |  |
|                 | -Contact Plating                                 | : Gold over copper Alloy $0.8 \mu m$ minimum |  |  |
|                 | -Durability                                      | : 500 Mating cycles                          |  |  |
|                 | -Delivered with Souriau contacts and Accessories |  |  |  |
|                 | -Temperature Range                               | -65°C to +175°C                              |  |  |
|                 | -Salt Spray                                      | : 500 hours                                  |  |  |

: 9.15 g ± 10%

8D 0

G

09

W

98

А

F

D

| Dim       | Nominal       |  |  |
|-----------|---------------|--|--|
| Р         | 3.25±0.2      |  |  |
| PP        | 5.49±0.2      |  |  |
| R1        | 18.26         |  |  |
| R2        | 15.09         |  |  |
| S         | 23.8±0.3      |  |  |
| V         | 20.83+0/-1.25 |  |  |
| W         | 2.1/2.5       |  |  |
| Z         | 31.5 Max      |  |  |
| VV THREAD | M12x1-6g      |  |  |


ORIENTATION : D


D

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 09-98



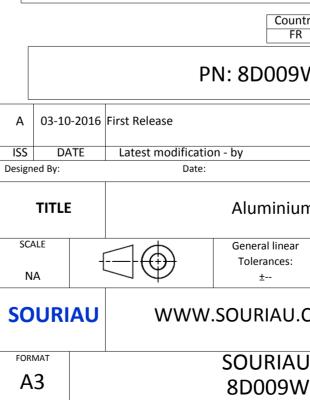

С

| Φ  |   |   |  |  |  |
|--|---|---|--|--|--|
|  |   | 4 |  |  |  |
| S EXAMPLE  |   | 3 |  |  |  |
| any non-conformit<br>which does not co<br>or of the Parties or b<br>idation, technical no<br>intry Jurisd<br>R<br>DW98AD | mply with<br>by a third party   | 2 |  |  |  |
|  |   |   |  |  |  |
|  | CUSTOMER DRAWING  |   |  |  |  |
| m Receptacle 8D series   |   |   |  |  |  |
| ar   | NPRDS / PROJECT<br>859  |   |  |  |  |
| I.COM  | COM This document is the property of SOURIAU it must not be reproduced or |   |  |  |  |
|  |   |   |  |  |  |
| W98AD-C  | U DRG N° SHEET<br>N/98AD-C 1/2  |   |  |  |  |
| B  | A   |   |  |  |  |
|  |   |   |  |  |  |

| r        | Ŧ                                      | ۵  | г | m |                          | 0   |
|----------|--|--|---|---|--------------------------|---|
|          |  | Contact Layout   |   |   |                          | Panel Cuto  |
| 4        | -X                                     |  |   |   | A                        | SQUARE FLANGE RECEPTACLE (TYPE 0)<br>REAR MOUNTING  |
|          | Shell Arrangement Numb<br>size 9 -98 3 | n X-avis Y-axis<br>(mm) (mm)<br>+ 065 (1.65) + 0.38 (0.97)<br>+ 0.00 (0.00) - 0.75 (1.91)<br>- 0.65 (1.65) + 0.38 (0.97)<br>- 0.65 (1.65) + 0.38 (0.97)<br>- 0.65 (1.65) + 0.38 (0.97) |   |   | ₩                        | ØA  |
| ω        |  |  |   |   |                          | Dim<br>ØA<br>ØAA<br>R1<br>ØT  |
|          | $\vdash$                               |  |   |   |                          | SOURIAU shall not be liable for an  |
|          |  |  |   |   |                          | due to a use of the Products w<br>the Specifications issued by either o<br>(professional recommenda |
| N        |  |  |   |   |                          | PN: 8D009V  |
|          |  |  |   |   | A 03-10-20               | 16 First Release  |
|          |  |  |   |   | ISS DATE<br>Designed By: | Latest modification - by<br>Date:   |
|          |  |  |   |   | TITLE                    | Aluminiun   |
| <u> </u> |  |  |   |   | SCALE<br>NA              | General linear<br>Tolerances:   |
|          |  |  |   |   | SOURIA                   | U WWW.SOURIAU.C   |
|          |  | 1  |   |   | FORMAT<br>A3             | SOURIAU<br>8D009W   |
|          | Н                                      | G  | F | E | D                        | C   |

