




POLES	MATERIAL NO.	ENG. NO.	AMPS	LENGTH
3	1300630037	C03001A48M020	30	2M +89-0MM (6'7"+3.50-0)
4	1300630135	C04001A48M020	25	2M +89-0MM (6'7"+3.50-0)

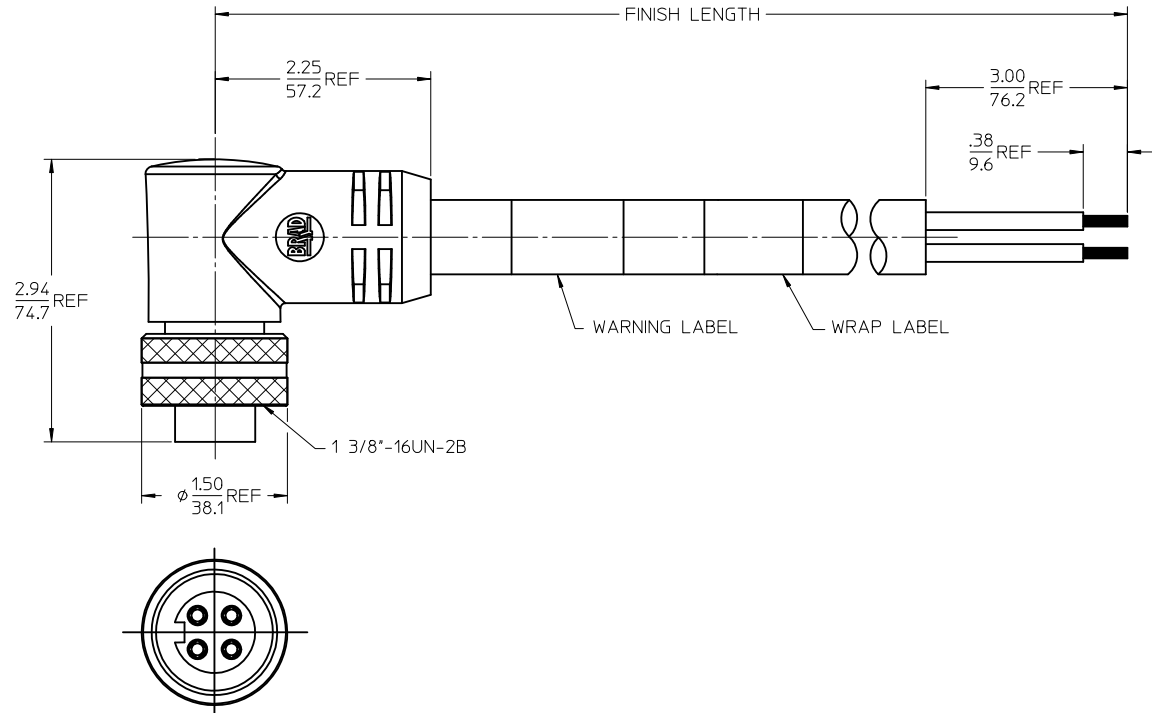

FACE VIEW-FEMALE INSERT  
3 POLE      4 POLE

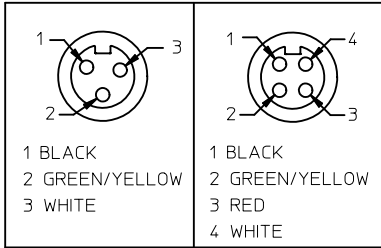

SPECS:  
 OVERMOLD: GRAY PVC  
 INSERT: BLACK PVC  
 COUPLING NUT: ANODIZED ALUMINUM  
 CABLE: #10AWG GRAY PVC  
 DUAL RATED UL TC/OPEN WIRING & STOOO  
 ELECTRICAL: 600V AC/DC

CREATE DOC EC NO: WNA2010-0435 DRWN:BRUPERT 2010/01/14 CHKD: 2010/01/15 APPR: JFMURPHY 2010/01/15	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:2	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
		4 PLACES	±	---	mm	INCH	DRAWN BY DATE B. RUPERT 01/12/2010		QUICK CHANGE FEMALE 90 DEGREE 3 & 4 POLE PORTABLES MOLEX INCORPORATED DOCUMENT NO. SD-130063-037 SHEET NO. 1 OF 1	
		3 PLACES	±	---	mm	INCH	CHECKED BY DATE B. WOODMAN 01/12/2010			
		2 PLACES	±	---	mm	INCH	APPROVED BY DATE JFMURPHY 2010/01/15			
1 PLACE	±	---	mm	INCH	MATERIAL NO. SEE CHART					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		ANGULAR ±1/2°		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						