

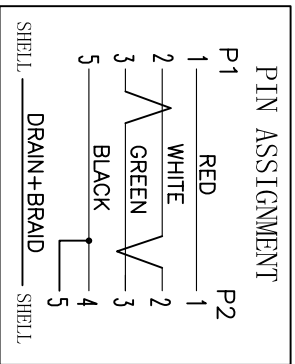


UNIT:mm

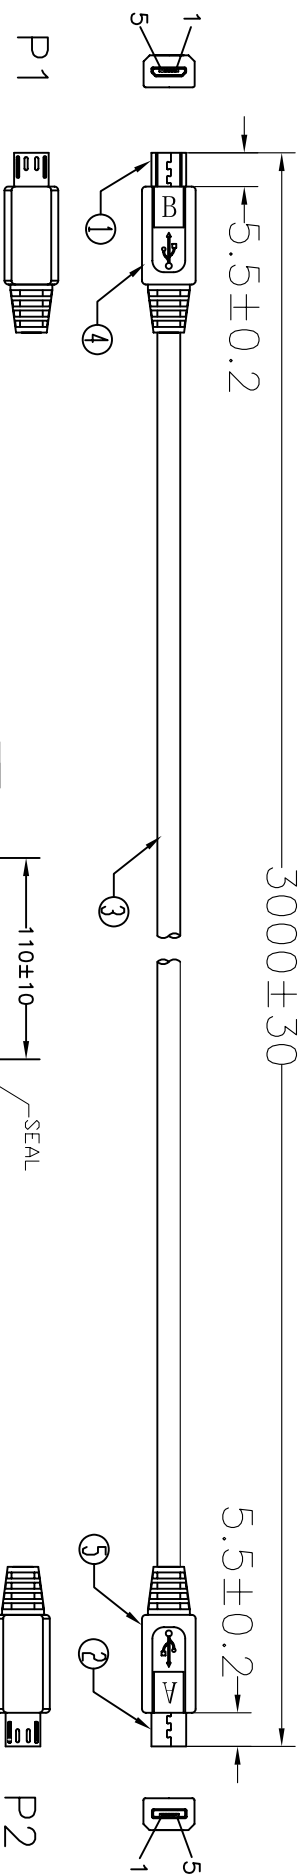

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm(max)
 3. Insulation resistance: 10Mohm(min)
 4. dielectric test: DC 300V

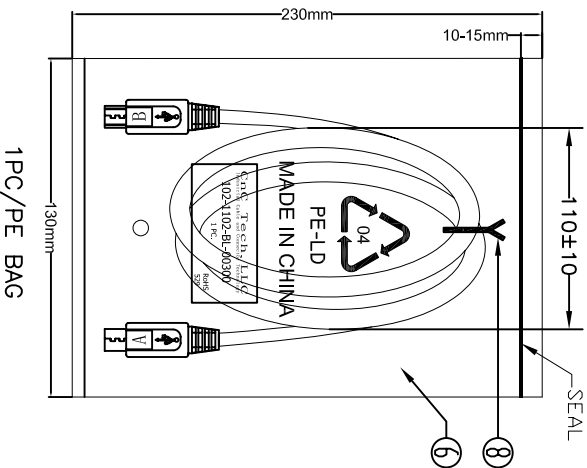

⑧	TIE	1	BLACK L=80mm
⑦	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"及印生产周期,有透气孔.
⑥	PE BAG	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK"MADE IN CHINA"+"PC"及印生产周期,有透气孔.
⑤	OUT JACKET	6g	BLACK PVC-40P (MOULD NO:WM-173)
④	OUT JACKET	6g	BLACK PVC-40P (MOULD NO:WM-116)
③	CABLE	1	USB2.0 UL2725 [28AWG(7/0.12TC+AL)*1P+28AWG(7/0.12TC)*2C]+AEB(48B TC) JACKET:BLACK OD:3.5mm L=3000±10mm
②	CONN	1	MICRO USB 5P A/M SOLDER TYPE SHELL:NICKEL PIN:G/F INSULATOR COLOR:BLACK
①	CONN	1	MICRO USB 5P B/M SOLDER TYPE SHELL:NICKEL PIN:G/F INSULATOR COLOR:BLACK

VERSIONS/EDITION		A/0		PROJECTION	
		A/0			
DRAWING NO		ZHONGHS		DRAWING NO	
CUSTOMER		INDUSTRIAL Cable and Connector Technology		CUSTOMER	
DATE		2012-02-16		DATE	
ITEM NO.		102-1102-BL-00300		ITEM NO.	

CNC Tech, LLC
 Industrial Cable and Connector Technology

4

3

2

1

4

3

2

1

D

D

C

C

B

B

A

A