


Units:mm

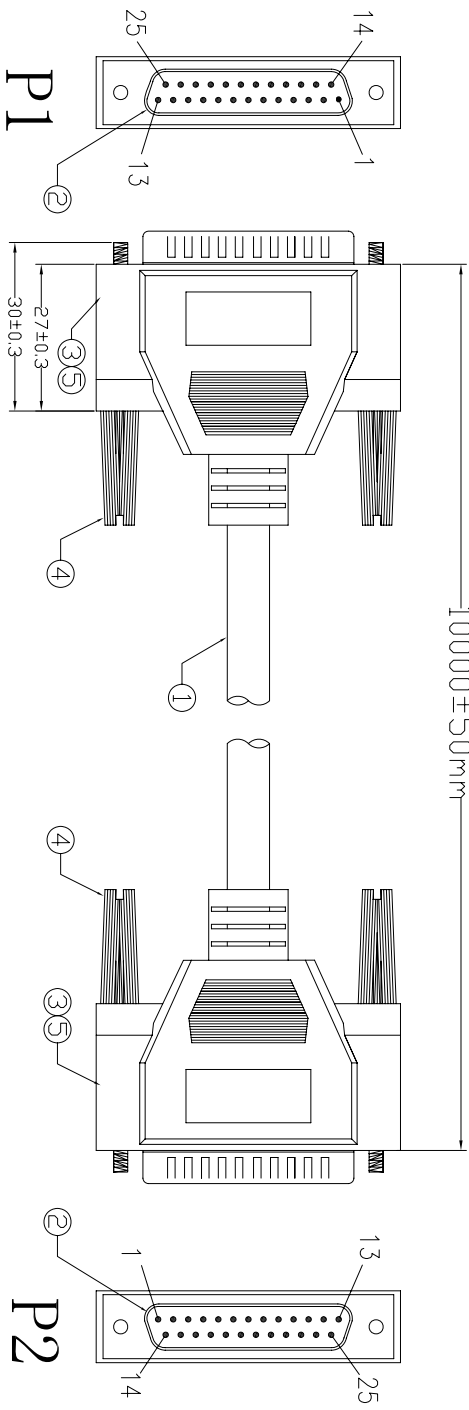

Electronic Test:  
 1. 100% Test,(Open,Short, Miss Wire)  
 2. Contact Resistance:5 ohm max.  
 3. Insulation Resistance:10M ohm min.  
 4. Hi-Pot:300V DC/10ms


PIN ASSIGNMENT	
P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
SHELL	SHELL

# Cnc Tech, LLC

Industrial Cable and Connector Technology

NO.	NAME	Q'TY	SPECIFICATION
⑧	TIE	2	WHITE L=200mm
⑦	PE BAG	1/5	CLEAR SIZE: 360*480*0.05mm PRINT BLACK"MADE IN CHINA"+"5PCS".
⑥	PE BAG	1	CLEAR SIZE: 230*300*0.05mm PRINT BLACK"MADE IN CHINA".
⑤	TUBE	2	HEAT SHRINK TUBE BLACK OD1.5*20MM
④	SCREW	4	#4-40UNC TYPE L=30mm,NICKEL PLATED,MOLD:BEIGE(V-29) ABS
③	IN JACKET	18g	CLEAR LD-PE (Mould NO.:NM-33)
②	CONN	60g	BEIGE(V-29) 40P PVC(Mould NO.:WM-017)
①	CABLE	2	DB 25P MALE SODDER TYPE PIN G/F SHELL NI-PLATED INSULATOR COLOR:BLUE
①	CABLE	1	NOUL 28AWG*25C+D+AL/WY OD6.5mm JACKET BEIGE(V-29) L=10000±30MM

VERSIONS/EDITION	A/0	PROJECTION
DRAWN BY	ZHONGHS	DARING NO.
CHECKED BY		CUSTOMER
APPROVAL BY		ITEM NO.
DECIDE BY		DATE
VERSIONS/EDITION	A/0	PROJECTION

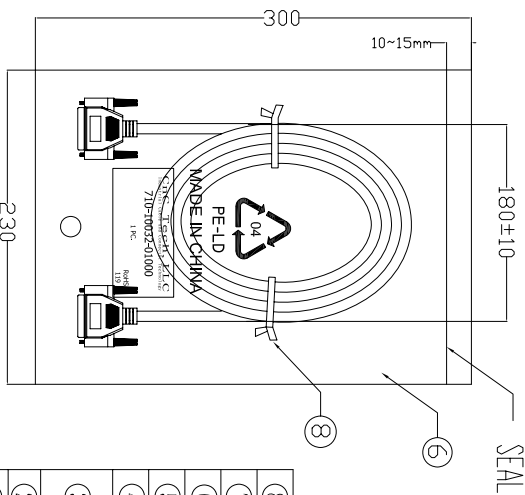

A

B

C

D

4

4

3

3

2

2

1

1

A

B

C

D