

Ratings

Voltage: 300 V
 Temperature: -40 ~ 80 °C
 Flammability: FT2

Conductor

Conductor count: 10
 Gauge: 22 AWG 0.33 mm²
 Material: bare copper strands
 Strand size: Ø 0.127 mm x 26
 Max resistance at 20 °C: 59.4 Ω /km

Insulator

Material: TPE 85A
 Color: white, black, red, yellow, blue, green, orange, purple, gray, brown
 Diameter: Ø 1.3 ± 0.10 mm
 Nominal thickness: 0.24 mm
 Minimum resistance at 20 °C: 100 MΩ /km

Shield

Type: braided
 Material: bare copper strands
 Coverage: Ø0.10 mm, 65% minimum coverage

Drain

Material: bare copper strands
 Stranding: Ø0.127 x 26

Outer jacket



Material: TPU 80A
 Color: black
 Diameter: Ø 7.5 ± 0.20 mm
 Nominal thickness: 0.80 mm

Wire marking: E339579 UL AWM STYLE 20280 22 AWG 80°C 300V --- cUL AWM I/II A 80°C 300V FT2 TENSILITY

Tests

Spark test: 3.0 kV
 Insulation tensile strength: 0.562 kgf/mm²
 Jacket tensile strength: 1.05 kgf/mm²
 After aging at 113 ± 2 °C for 7 days:
 Minimum jacket tensile strength 70 % original
 Minimum insulation tensile strength 75 % original
 Minimum jacket elongation 65 % original
 Minimum insulation elongation 75 % original
 Heat shock: 121 ± 1 °C /1 hour, no observed degradation
 Deformation: 121 ± 1 °C /1 hour, ≤ 50 %
 Cold bend: -10 ± 2 °C /1 hour, no observed cracking
 Dielectric test: 2000 Vac for 1 minute without breakdown

Use: Internal wiring or external interconnection of electronic equipment.

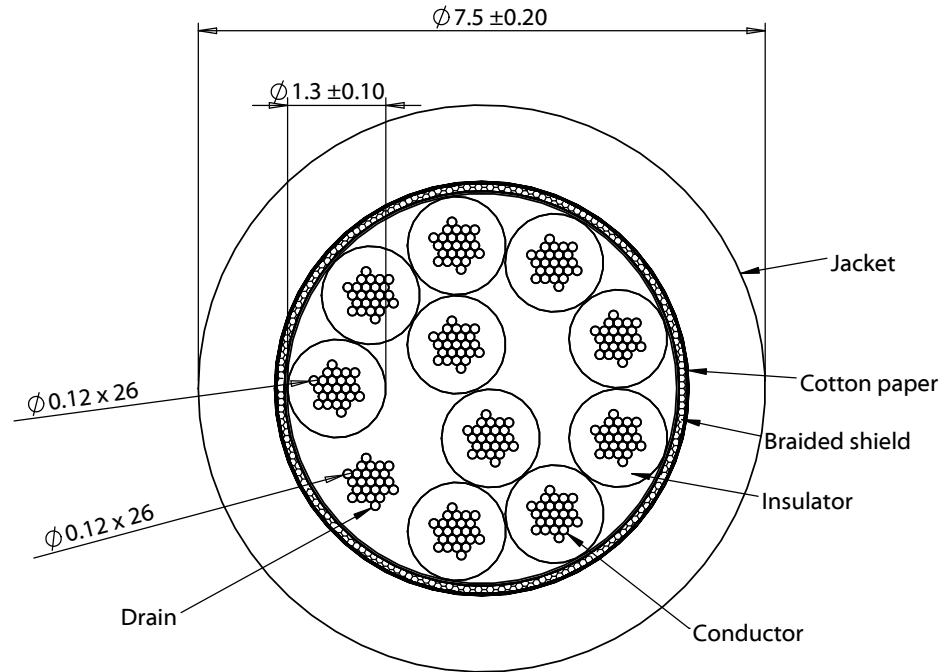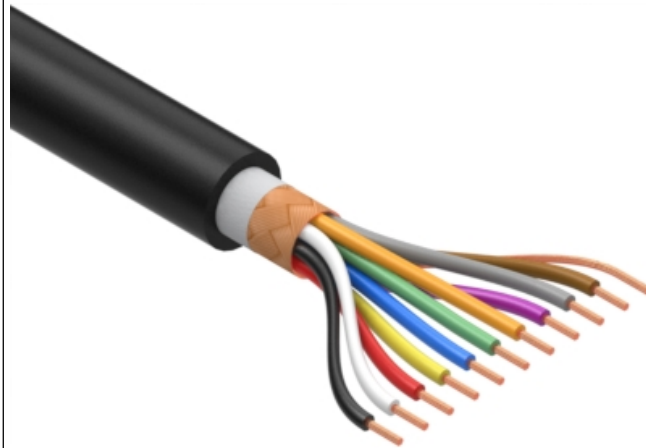

Revision:	Date:	Description:
A	6/12/2019	Initial release

Prepared: **AG**
Digitally signed by AG
 Date: 2019.06.12
 12:31:08 -07'00'

Verified: **JW**
Digitally signed by JW
 Date: 2019.06.13
 10:29:31 -07'00'

Dimensions are in millimeters.
 Tolerances:
 X: ± 0.5 mm
 X.X: ± 0.3 mm
 X.XX: ± 0.05 mm

Notes:
 RoHS and REACH compliant
 Phthalate and halogen free
 Function: no open, no short circuit, no intermittent

Description:
 Wire, 10C BC, 22 AWG, UL20280, 300V, 80C, 7.5 mm, braided shield, FT2, TPU

TENSILITY

tel 1.541.323.3228 800 877.670.7118
 fax 1.541.323.4202 web tensility.com

Size: A Part number: **30-00947**

Scale: 10:1 Sheet 1 of 1