


- High Common Mode Impedance at High Frequency.
- Excellent Noise Suppression Performance.
- Small Size and Low Profile, Surface Mount Type.
- Operating Temperature Range: -40°C to +85°C.
- RoHS Compliant.




Electrical Specifications @25°C						
Part Number	Common Mode Impedance	Insulation Resistance	Rated Current	DC Resistance	Rated Voltage	Withstand Volt
	Ω , @100MHz	M Ω Min	mA Max	Ω Max	Vdc Max	Vdc Max
CC2012A-801	800 \pm 25%	10	300	0.88	50	125

MECHANICAL DIMENSIONS (unit:mm)

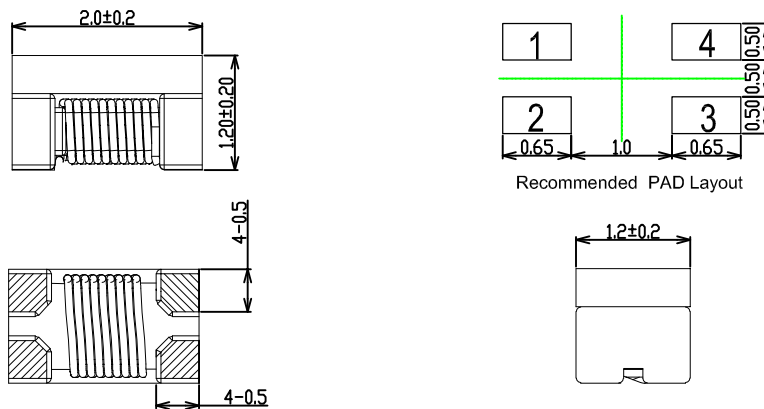


Unless otherwise specified all tolerances are: \pm 0.25mm

SCHEMATIC

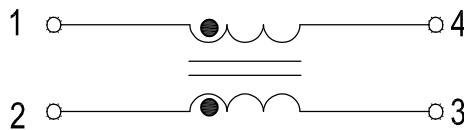

IMPEDANCE

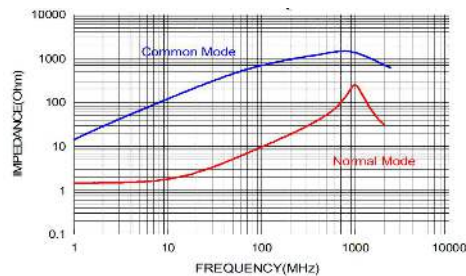

PAN SIZE:2000PCS/REEL
UNIT WEIGHT:0.02g